





环保物料

Specification:


1. Rating : DC 30V 3.5A.
2. Contact resistance:  $\leq 30m\Omega$ .  
After test:  $\leq 50m\Omega$
3. Insulation resistance:  $\geq 100M\Omega$  (500VDC).  
After test:  $\geq 50M\Omega$
4. Withstanding voltage: 500VAC.
5. Insertion and extraction force: 3N~30N.
6. life test: 5000cycles min.
7. Operation temperature range:  $-20^{\circ}C \sim 70^{\circ}C$ .
8. Preservative temperature range:  $-40^{\circ}C \sim 85^{\circ}C$ .

J0-4 E30 D R 1 2 9 2-05 21  
1 2 3 4 5 6 7 8 9 10 11


- 1.J0:DC JACK
- 2.4:  $\phi 4.0mm$
- 3.E30=板上中心高3.0mm
- 4.D: DIP
- 5.R:  $90^{\circ}$
- 6.1: 无外壳
- 7.2: 2PIN
- 8.9: 10T
9. 柱子/唛啦 2: 带两个柱子无唛啦
- 10.TYPE 码 05:
- 11.Contact Area plating on contacts  
21: Silver plating

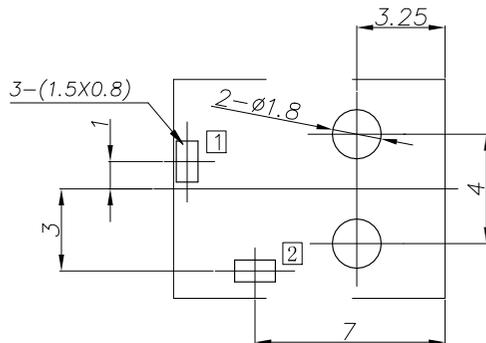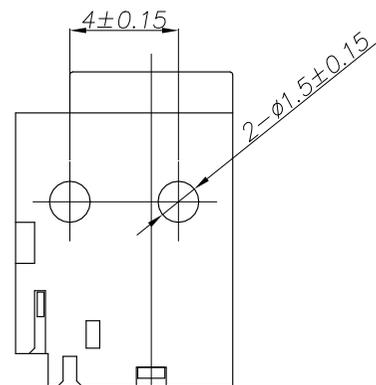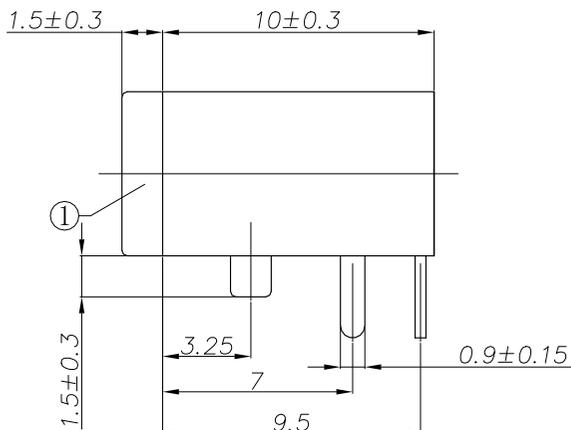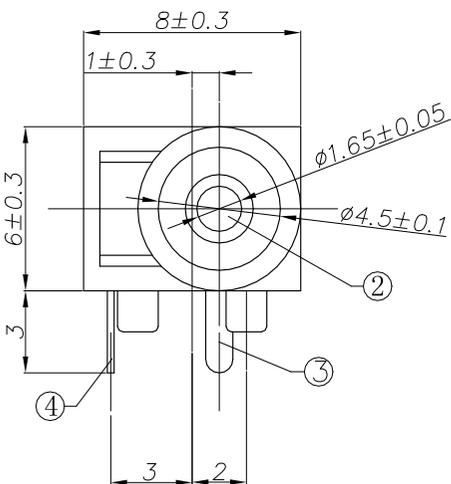

RECOMMENDED P. C. B. LAYOUT  
UNSPECIFIED TOLERANCE:  $\pm 0.05$   
(TOP VIEW)



□ : TERMINAL NO. ○ : ITEM NO.

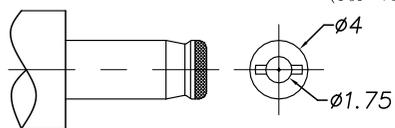



DC MATE PLUG

NO.	DESCRIPTION	QTY	MATERIAL	REMARK
④	Tip spring	2	Copper Alloy	Silver
③	Center pin terminal	1	Copper Alloy	Silver
②	Center pin	1	Copper Alloy	Copper&tin alloy/Ni
①	Housing	1	PA10T	Black

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE	NAME	DATE	PART NO.	DWG NO.
A0	新图面发行	21.03.09	LINEAR	1:1			J0-4E30DR1292-0521	ENDE05
A1	换图框发行	23.09.20	0.0±0.35	APPROVED				
A2	更新材质	24.01.18	X° REF±6°	DESIGNER				
			UNIT: MM	0.00±0.25	X° ±3°		TITLE	
			SIZE: A4	0.000±0.15	X° X' ±2°	DALAN DAI	DC POWER JACK	
				DRAWN	Dalan Dai	24.01.18		REV A3 SHEET 1/1


**JCTC**®

环保物料

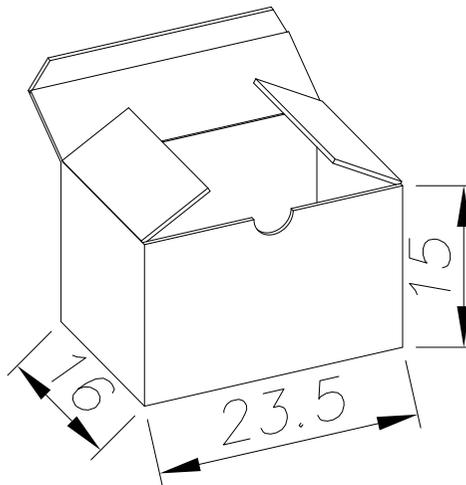


PE袋 (1000pcs)

4000PCS/4袋/内箱

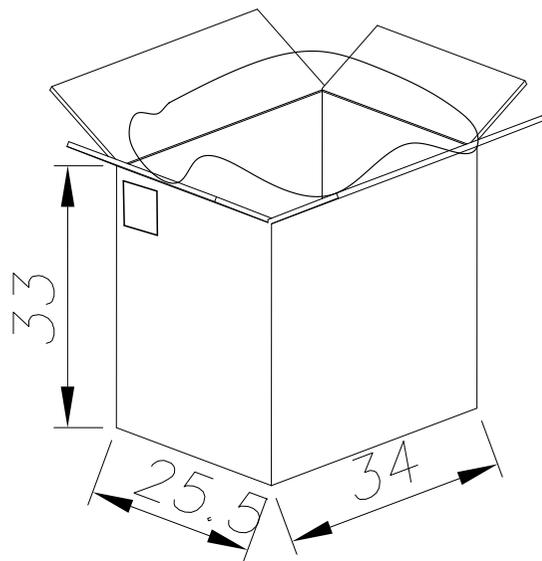

16000PCS/4内箱/16袋/外箱



REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.			
A0	新图面发行	21.03.09		LINEAR	ANGLES	1:1							
A1	换图框发行	23.09.20	0.0±0.35	X° REF±6°	APPROVED			JO-4E30DR1292-0521	ENDE05				
			UNIT: MM	0.00±0.25	X° ±3°	DESIGNER		TITLE					
			SIZE: A4	0.000±0.15	X° X' ±2°	DRAWN	Dalan Dai	23.09.20	DC POWER JACK	REV	A2	SHEET	1/1