

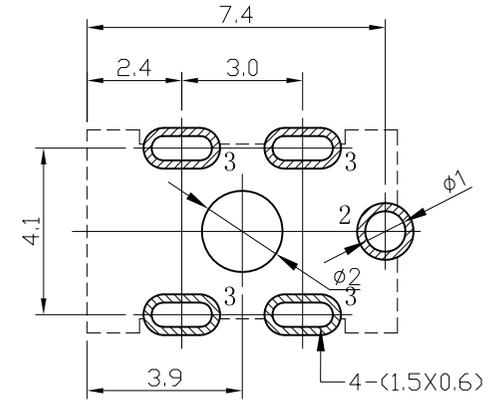

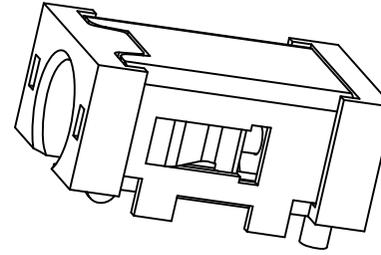
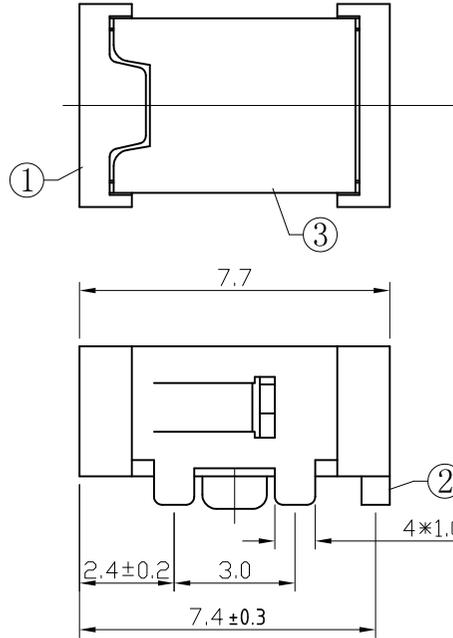


环保物料

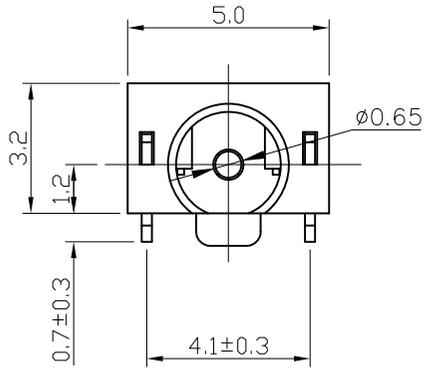

SCHMATIC




SPECIFICATION

1. Rating : DC 30V 1.0A;
2. Contact resistance: $\leq 0.03\Omega$;
3. Insulation resistance: $\geq 100M\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 2-20N;
6. life test: 5,000 cycles.

J0-7 E12 D R 0 2 L 0-00 11
1 2 3 4 5 6 7 8 9 10 11


- 1.J0:DC
- 2.7: $\phi 2.35mm$
- 3.E12=板上中心高1.2mm
- 4.D:DIP
- 5.R:90°
- 6.0:带外壳
- 7.2:2PIN
- 8.L:LCP
- 9.柱子/唛啦 4:带一个柱子无唛啦
- 10.TYPE 码 00:
- 11.Contact Area plating on contacts
11:Silver/Tin plating

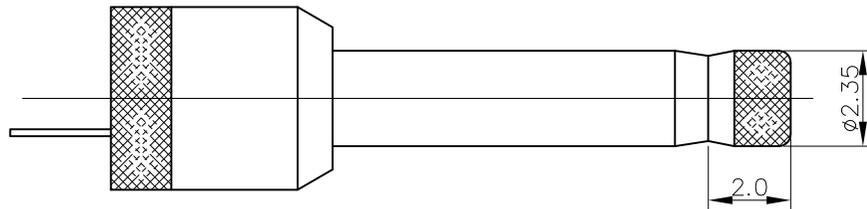







3	COAT	1	C5210	Ag-Plating
2	PIN	1	C2680	Ag-Plating
1	HOUSING	1	PA9T, BLACK	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
A0	新图面发行	21.10.14		LINEAR	ANGLES	1:1								
			SIZE: A4	0.00±0.25	X° ±3°	DESIGNER	Daniel Dong	21.10.14	TITLE		REV	AO	SHEET	1/1
				0.00±0.10	X° X' ±2°	DRAWN	CGY	21.10.14	φ2.35 DC POWER JACK					


环保物料



单重: 0.3g

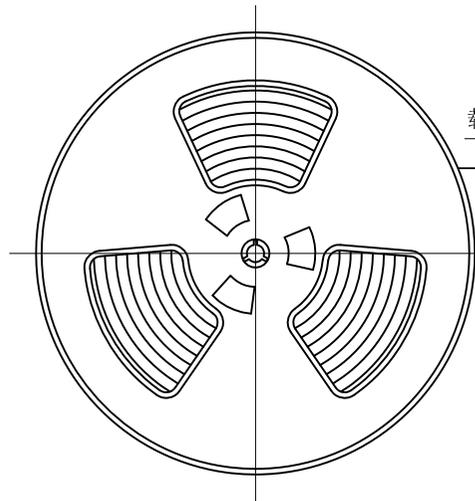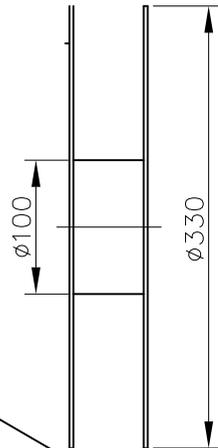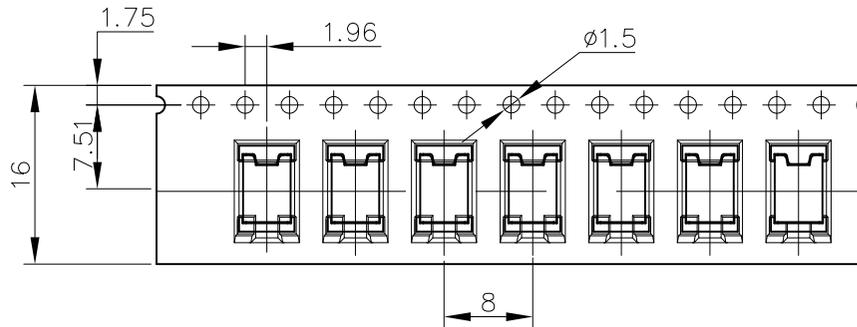

载带拉出方向

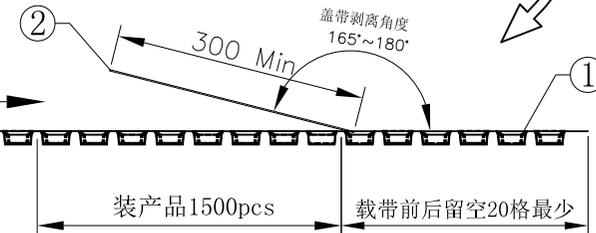


装产品1500pcs

载带前后留空20格最少

NOTES:

1. PEELING RESISTANCE: 10gf - 120gf;
2. PEELING SPEED: 300mm/minutes;
3. N.W: 7.2 Kg;
4. G.W: 14.5 Kg;

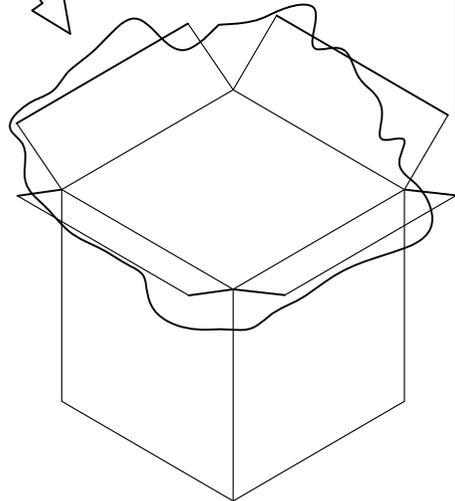

REV.	REVISION RECORD	DATE	UNIT: MM SIZE: A4	GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
A0	新图面发行	21.12.15		LINEAR	ANGLES	APPROVED	Frey Yang	21.12.15	J0-7E12DR02L0-0011	ENDE05				
				0.0±0.30	X° REF±6°	DESIGNER	Daniel Dong	21.12.15	TITLE φ2.35 DC POWER JACK		REV	AO	SHEET	1/1
				0.00±0.25	X° ±3°	DRAWN	CGY	21.12.15						
				0.000±0.10	X° X' ±2°									