
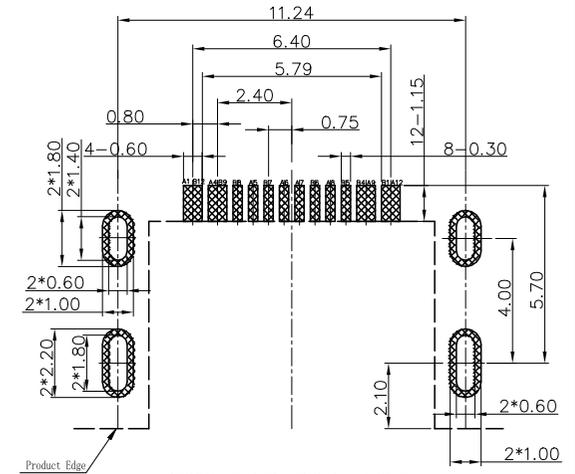


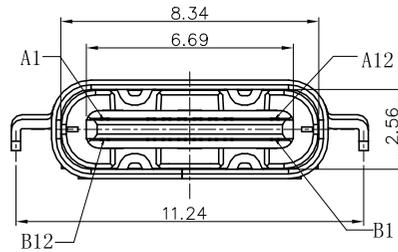
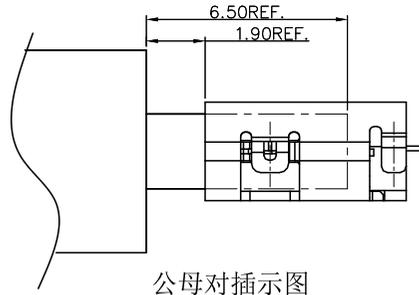
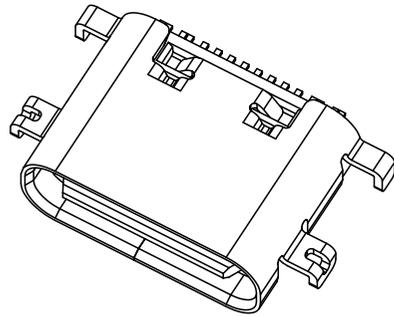


环保物料

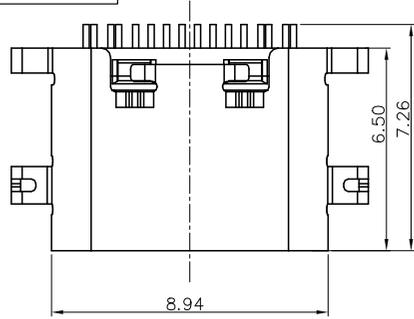


RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

NOTES:

SPECIFICATION:


- CURRENT RATING: 5.0A MAX
- VOLTAGE: 100 VAC
- TEMPERATURE RANGE: -30 °C ~ 85 °C
- CONTACT RESISTANCE: 40 MILLIONHM MAX
- INSULATION RESISTANCE: 100 MEGOHMS MIN.
- INSERTION FORCE : 5N~20N
- UNMATING FORCE: 8N~20N
- DURABILITY: 10,000 CYCLES

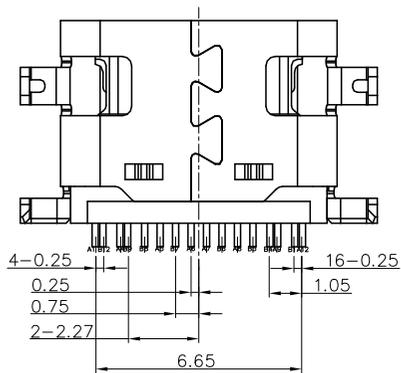


A1	GND	B12	GND	6	SHELL	STAINLESS STEEL	NI Plated	1PCS
A4	VBUS	B9	VBUS	5	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
A5	CC1	B8	SBU2	4	MD	LCP UL 94V-0	BLACK	1PCS
A6	DP1	B7	DN2	3	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
A7	DN1	B6	DP2	2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
A8	SBU1	B5	CC2	1	HOUSING	LCP UL 94V-0	BLACK	1PCS
A9	VBUS	B4	VBUS					
A12	GND	B1	GND					
PIN	SIGNAL NAME	PIN	SIGNAL NAME	NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

一般公差 GENERAL TOLERANCE					绘图 DR.	李兴泽		料号 PART NO.		文件编号 NUMBER		JCTC ®	
X.X ±0.30 X' ±2'					校对 CHK.			JCTC-USB-7024		ENDPT01			
X.XX ±0.20 X.X' ±1'					审核 CHK.			品名 TITLE				比例 SCALE	
X.XXX ±0.10 ▲ MAJOR DIM.					核准 APPD.			USB C F单排16P 6.5沉板1.6 CONN.				SHEET 1/1	
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位 UNIT	mm						版次 REV. A1	

环保物料




USB Type-C
沉板式母座产品

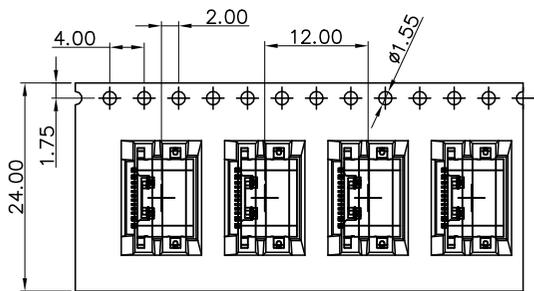


客户拉出方向

① 产品入载带示意图


数量/卷: 1500 PCS
数量/箱: 1500 X 10 = 15000 PCS
包装带内圈空18格, 外圈空18格.

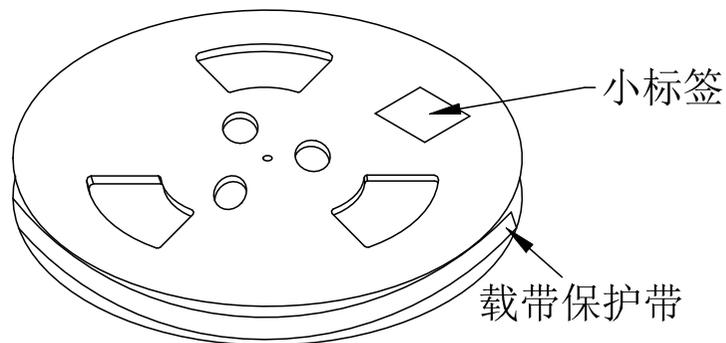


② 卷盘贴标签示意图

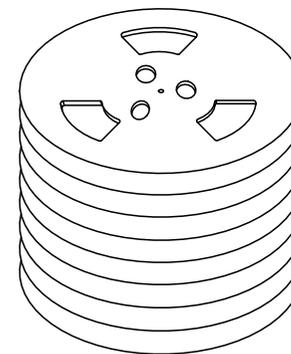

③ 10盘产品叠层示意图

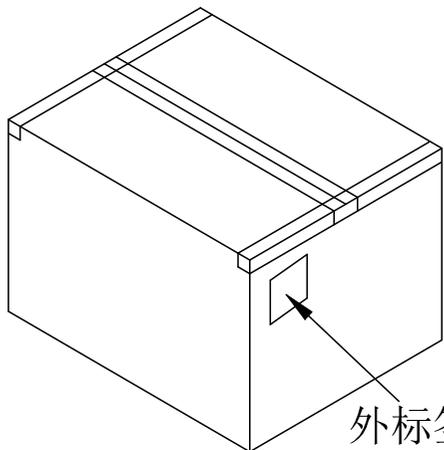

⑤ 外箱封箱示意图

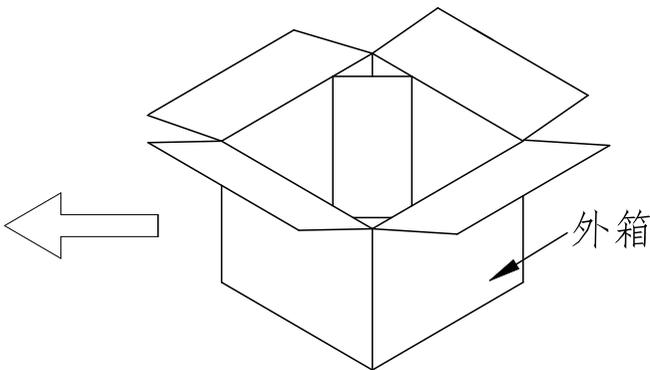

④ 产品入外箱示意图

					一般公差 GENERAL TOLERANCE	绘图 DR.	李兴泽	料号 PART NO.	文件编号 NUMBER	JCTC [®]			
					X.X ±0.30	X* ±2°	校对 CHK.	JCTC-USB-7024	ENDPT01				
					X.XX ±0.20	X.X* ±1°	审核 CHK.	品名 TITLE			比例 SCALE	SHEET	版次 REV.
					X.XXX ±0.10	▲ MAJOR DIM.	核准 APPD.	USB C F单排16P 6.5沉板1.6 CONN.			1/1	1/1	A1
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位 UNIT	mm							