
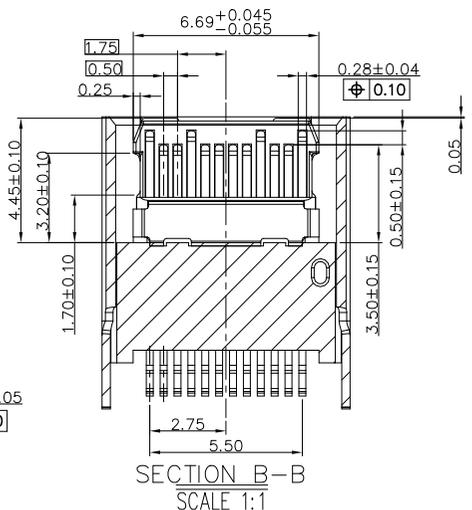
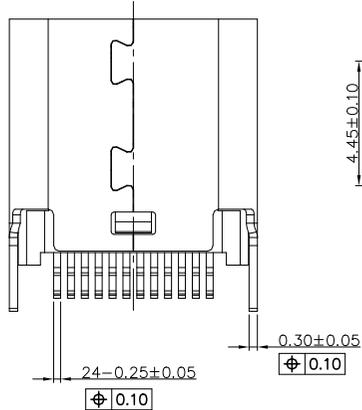
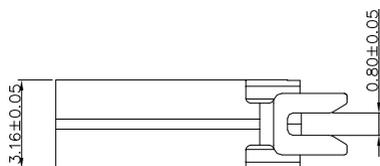
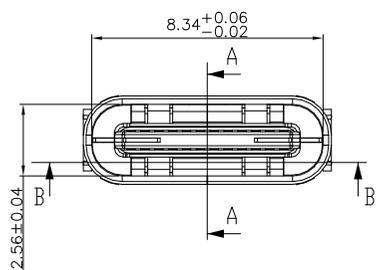

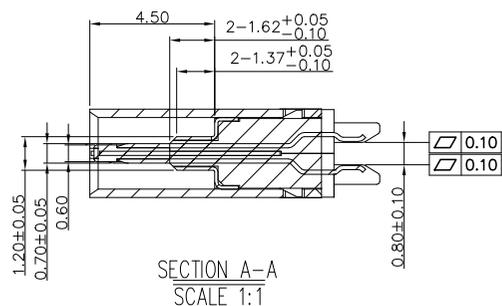


环保物料

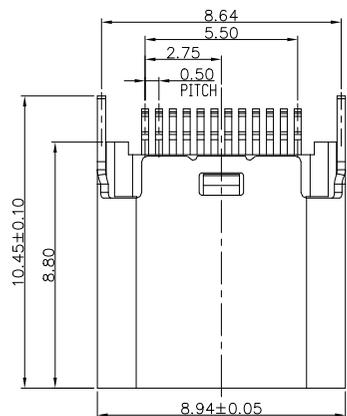


NOTES:

- MATERIAL:
 - MOLDING: LCP UL94 V-0 ,Black
 - CONTACT: COPPER ALLOY.
 - GOLD FLASH ALL OVER 50u" Min NICKEL AND 100u"Min Tin ALL OVER 50u" Min NICKEL ON SOLDER AREA
 - SHELL: SUS304-H,T=0.30±0.03mm
 - 50u" NICKEL PLATING OVER ALL.
 - SHILD: SUS304-H,T=0.12±0.03mm
- MECHANICAL:
 - INSERTION: 5~20N.
 - EXTRACTION: 8~20N.
 - DURABILITY: 10000 CYCLES
- ELECTRICAL:
 - CURRENT: 5A FOR VBUS;
 - 1.25A FOR GND PIN.
 - 0.25A FOR OTHER.
 - VOLTAGE: 20 V MAX
 - WITHSTANDING VOLTAGE: 100V AC.
 - CONTACT RESISTANCE: 40mΩ MAX.
 - INSULATION RESISTANCE: 100MΩMIN.
- ENVIRONMENTAL
 - TEMPERATURE RANGE -55°C ~ +85°C

					一般公差GENERAL TOLERANCE	绘图 DR.	料号 PART NO.	文件编号 NUMBER	JCTC ®			
					X.X ±0.30	X* ±2°	JCTC-USB-A675	ENDPT01				
					X.XX ±0.20	X.X* ±1°	品名TITLE					
					X.XXX ±0.10	▲MAJOR DIM.	USB 3.1 C TYPE FEMALE SPLINT CONNECTOR	比例SCALE	SHEET	版次REV.		
版次REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位UNIT					1/1	1/1	A1

环保物料

USB TYPE-C FULL-FEATURED RECEPTACLE INTERFACE PIN ASSIGNMENTS

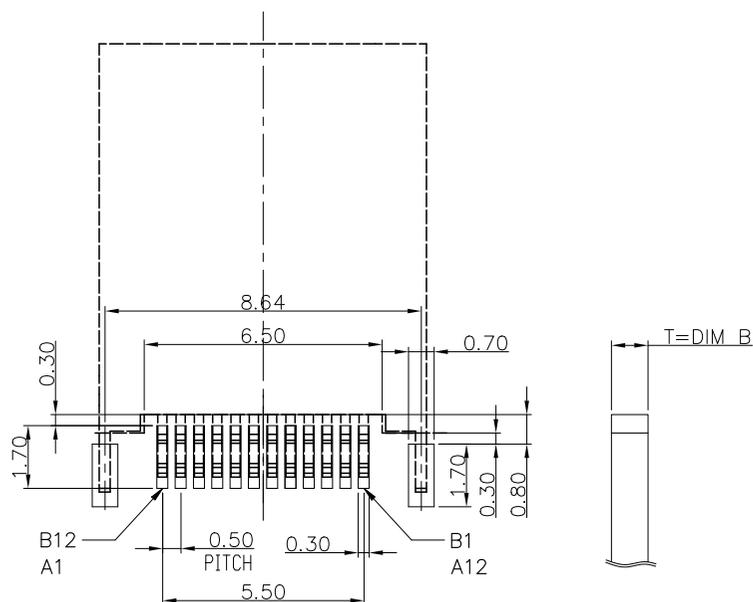


RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

PIN	Signal Name	Description	PIN	Signal Name	Description
A1	GND	Ground return	B12	GND	Ground return
A2	SSTXp1	Positive half of first SuperSpeed TX differential pair	B11	SSRXp1	Positive half of first SuperSpeed RX differential pair
A3	SSTXn1	Negative half of first SuperSpeed TX differential pair	B10	SSRXn1	Negative half of first SuperSpeed RX differential pair
A4	VBUS	Bus Power	B9	VBUS	Bus Power
A5	CC1	Configuration Channel	B8	SBU2	Sideband Use (SBU)
A6	Dp1	Positive half of the USB 2.0 differential pair-Position 1	B7	Dn2	Negative half of the USB 2.0 differential pair-Position 2
A7	Dn1	Negative half of the USB 2.0 differential pair-Position 1	B6	Dp2	Positive half of the USB 2.0 differential pair-Position 2
A8	SBU1	Sideband Use (SBU)	B5	CC2	Configuration Channel
A9	VBUS	Bus Power	B4	VBUS	Bus Power
A10	SSRXn2	Negative half of second SuperSpeed RX differential pair	B3	SSTXn2	Negative half of second SuperSpeed TX differential pair
A11	SSRXp2	Positive half of second SuperSpeed RX differential pair	B2	SSTXp2	Positive half of second SuperSpeed TX differential pair
A12	GND	Ground return	B1	GND	Ground return

					一般公差 GENERAL TOLERANCE		绘图 DR.		料号 PART NO.		文件编号 NUMBER		JCTC ®		
					X.X ±0.30	X° ±2°	校对 CHK.		JCTC-USB-A675		ENDPT01				
					X.XX ±0.20	X.X° ±1°	审核 CHK.		品名 TITLE		比例 SCALE		SHEET		
					X.XXX ±0.10	▲ MAJOR DIM.	核准 APPD.		USB 3.1 C TYPE FEMALE SPLINT CONNECTOR		1/1		版次 REV. A1		
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位 UNIT	mm									

环保物料


将成品依同一方向放入真空盘内，如图所示。
At same direction, put product onto the tray. Direction refers to below drawing.

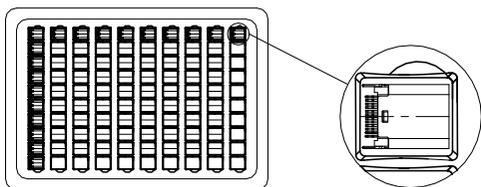

二.


- 1) 一只纸箱可放置之包装盘（包括上盖）见下表。
1) trays per carton, please see next table.
- 2) . 每1个纸箱用的包装数量详见下表。
2)The Qty of products per carton please see next tabel.
- 3) 将装满成品的真空盘用PE带捆紧后放在塑料带内（10盘一捆），装完后再封箱。
3) Bind the trays with PE tape and then(a bundle of 10 trays),put them into the poly bag. Seal the carton with tape.

VIEW-2

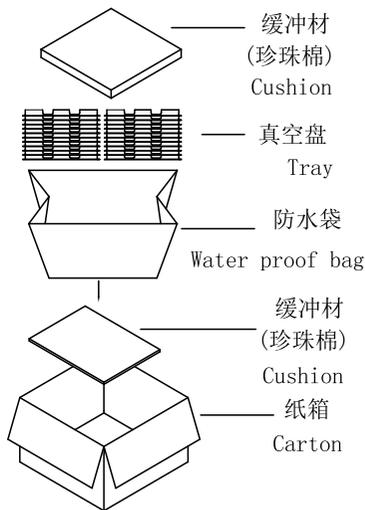

三.

- 1) . 将标签贴于纸箱侧麦上方。
Stick the needful label On the up-right corner of the side of carton.

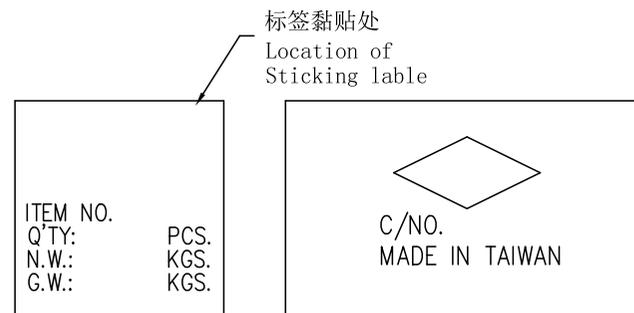

VIEW-3

备注 (REMARK)

1. 若有未装满之零数箱，必须以缓冲材塞满。
The unfilling-carton must be filled with assuagement.
2. 防水袋需用胶带贴实且封口。
waterproof plastic bag must be folded up.
3. 装满成品后之外箱，最大堆积箱数：5箱
About the box fully filled with products, the MAX accumulating quantity of boxes is 5.
4. 如须贴Bar-code，请依Bar-code作业办法执行
If barcode lable is required, do it according to the related barcode lable operation standards.

包装明細表 (The detail of the packing)

產品料號 (Product No.)	包裝容量 (Packing Capacity)			重量 Weight (Kg)		
	pcs/box	boxes/Carton	Pcs/Box	N.W./Pcs	N.W./Box	G.W./Box
JCTC-USB-A675	100	70	7000			

					一般公差 GENERAL TOLERANCE		繪圖 DR.		料號 PART NO. JCTC-USB-A675		文件編號 NUMBER ENDPT01		JCTC ®	
A1	21.08.19	更新圖框發行	董東平	楊章雄	X.X ±0.30	X° ±2°	校對		品名 TITLE		比例 SCALE	SHEET		
A0	19.11.15	新圖面發行	李興澤	楊章雄	X.XX ±0.20	X.X° ±1°	審核		USB 3.1 C TYPE FEMALE SPLINT CONNECTOR		1/1	1/1	A1	
版次 REV.	日期 DATE	變更內容 DESCRIPTION	審核 CHK.	核准 APPD.	單位 UNIT mm	▲ MAJOR DIM.	核准							