
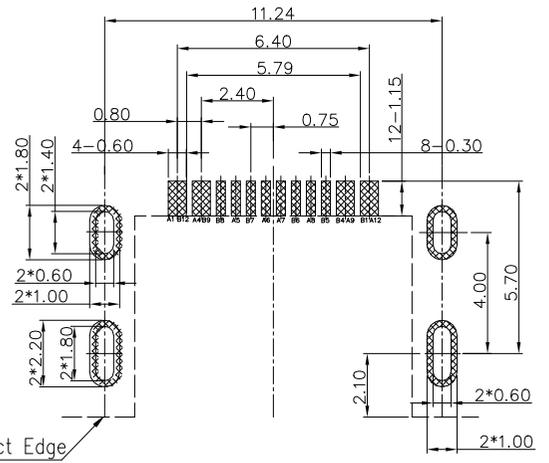
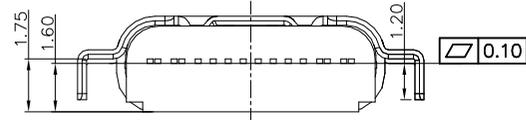

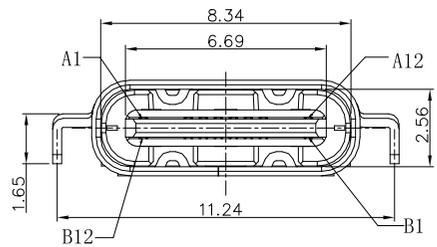
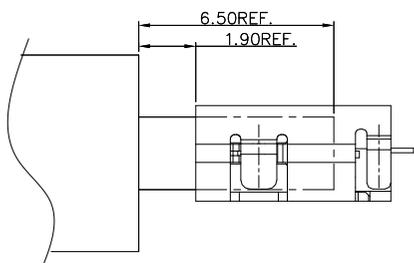
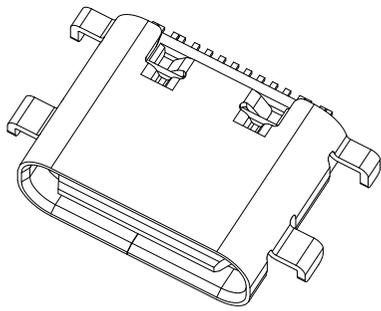




环保物料

- NOTES:
SPECIFICATION:
1. CURRENT RATING: 5.0A MAX
 2. VOLTAGE: 100 VAC
 3. TEMPERATURE RANGE: -30 °C ~ 85 °C
 4. CONTACT RESISTANCE: 40 MILLIONHM MAX
 5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
 6. LNSERTION FORCE : 5N~20N
 7. UNMATING FORCE: 8N~20N
 8. DURABILITY: 10,000 CYCLES

公母对插示意图

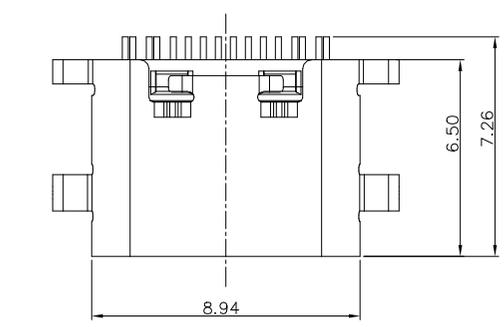

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

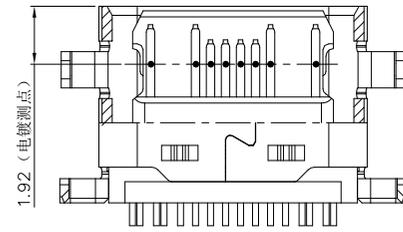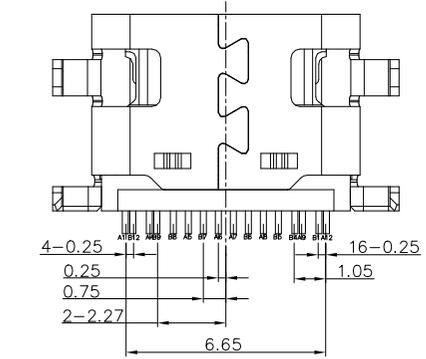

Sec A-A

PIN	SIGNAL NAME	PIN	SIGNAL NAME	NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
A1	GND	B12	GND	6	SHELL	STAINLESS STEEL	NI Plated	1PCS
A4	VBUS	B9	VBUS	5	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
A5	CC1	B8	SBU2					
A6	DP1	B7	DN2	4	MD	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
A7	DN1	B6	DP2	3	CONTACT	COPPER ALLOY	Au 15u"/Ni Plated	1SET
A8	SBU1	B5	CC2	2	CONTACT	COPPER ALLOY	Au 15u"/Ni Plated	1SET
A9	VBUS	B4	VBUS					
A12	GND	B1	GND	1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS


					一般公差 GENERAL TOLERANCE		绘图 DR. 李兴泽		料号 PART NO. JCTC-USB-B024		文件编号 NUMBER ENDPT01		JCTC [®]		
					X.X ±0.30	X° ±2°	校对 CHK.		品名 TITLE USB C F单排16P 6.5沉板1.6 CONN. 脚长1.65		比例 SCALE 1/1				SHEET 1/1
					X.XX ±0.20	X.X° ±1°	审核 CHK.				版次 REV. A1				
					X.XXX ±0.10	▲ MAJOR DIM.	核准 APPD.								
					单位 UNIT mm										

版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.
A1	21.08.24	更新图框发行	董东平	杨章雄
A0	20.11.19	新图面发行	李兴泽	杨章雄

环保物料

检验规范

客户出料方向

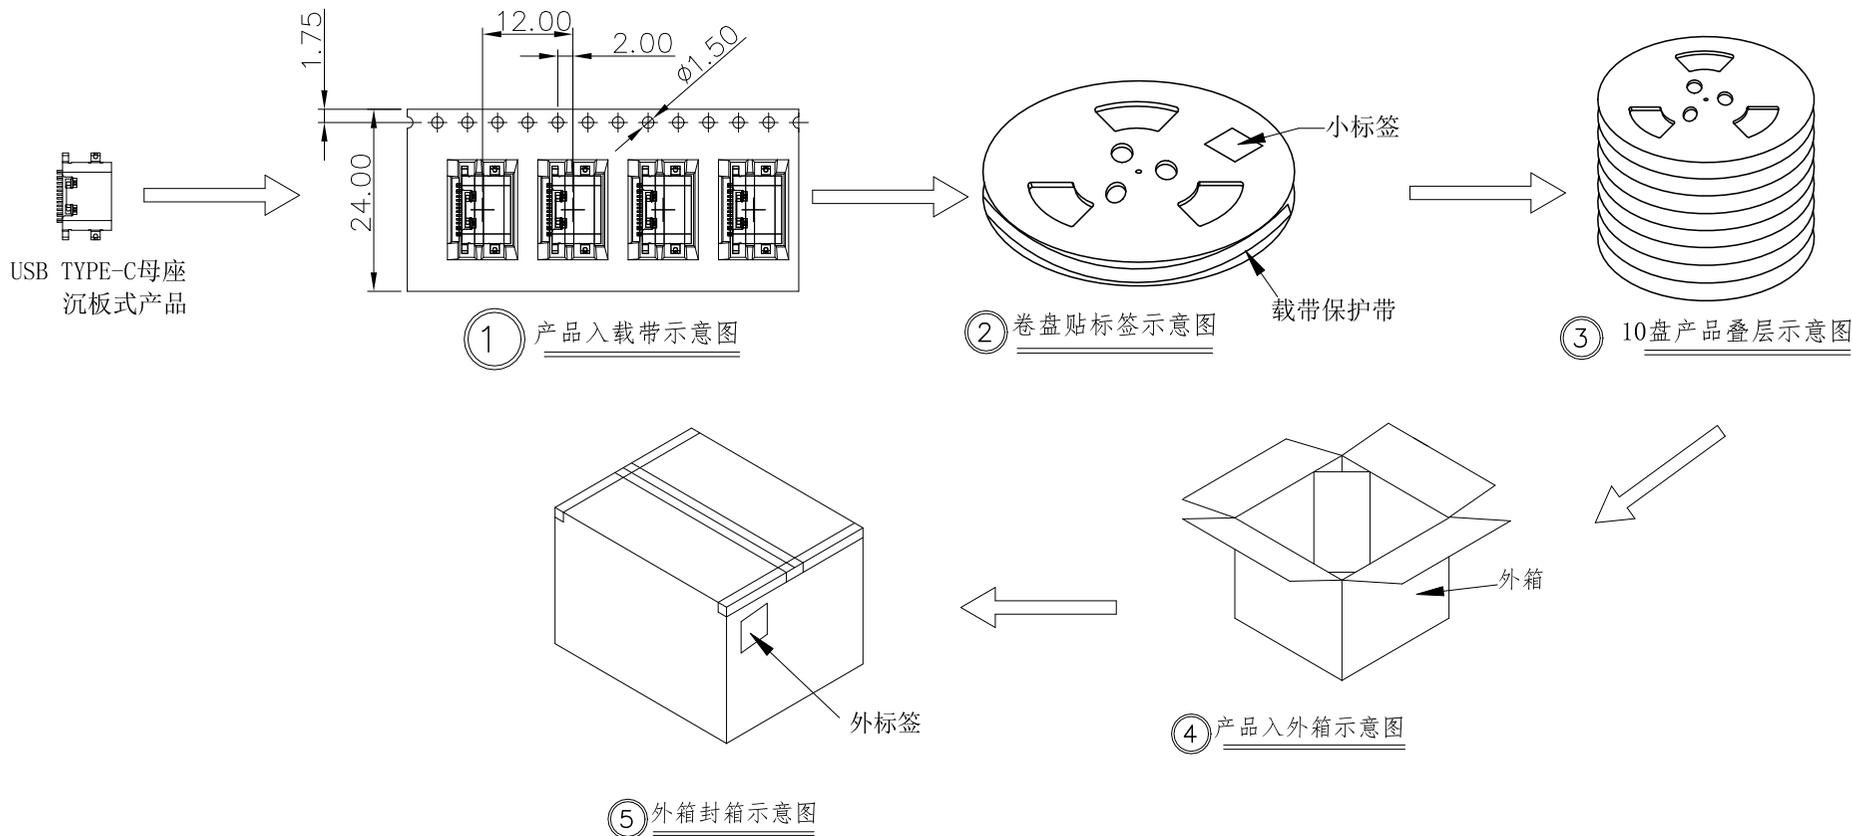

NOTE:

1. QUANTITY/REEL:1500 PCS
数量/卷:1500 PCS
QUANTITY/INNER CARTON:1500 X 10 = 15000 PCS
数量/箱: 1500 X 10 = 15000 PCS
2. FREE 18 CAVE IN THE FRONT CARRIER ADN FREE 18 CAVE IN THE END CARRIER.
包装带内圈空18格, 外圈空18格.

					一般公差GENERAL TOLERANCE	绘图 DR.	李兴泽	料号 PART NO.	文件编号 NUMBER	JCTC [®]				
					X.X ±0.30	X* ±2*	校对 CHK.	JCTC-USB-B024	ENDPT01					
					X.XX ±0.20	X.X* ±1*	审核 CHK.	品名TITLE				比例SCALE	SHEET	版次REV.
					X.XXX ±0.10	▲MAJOR DIM.	核准 APPD.	USB C F单排16P 6.5沉板1.6 CONN. 脚长1.65				1/1	1/1	A1
版次REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位UNIT	mm								