

环保物料








NOTES:

- MATERIAL AND PLATING:**
Housing/Cover: PA9T+30%G.F,UL94V-0,Black.
Contact: C5191 T=0.2mm,Gold 10u"Plating On Contact Area
100u" Min. Tin Plating On Solderails
50u" Min. Nickel Underplating Over All.
Front Shell: SUS201 T=0.25mm, 50u" Nickel Plated.
Middle Shell: SUS201 T=0.25mm, No Plated.
- MECHANICAL CHARACTERISTIC**
Mating Force: 35N(3.57Kgf) Max.
Unmating Force: 10N(1.02Kgf) Min(Initial);
8N(0.816Kgf) Min(After).
▲Durability: 5000 Cycles.
- ELECTRICAL CHARACTERISTIC**
Current Rating: 1.5A
Voltage Rating: 30V AC Max.
Contact Resistance: 30m Ohm Max.
Insulation Resistance: 1000M Ohm Min.
Dielectric Withstanding Voltage: 500V AC.
- TEMPERATURE**
Operating Temperature: -40°C~+85°C
Storage Temperature: -60°C~+105°C
- DATECODE INFORMATION:**
YYMMDD (Y: YEAR M: MONTH D: DATE)
- IR CONDITIONS:**
265±5%,10s, Twice.
- SALT SPRAY:**
Shell: 48h; Contact Area: 48h; Solder Area: 12h.
- Solderability:**
245±5%, 3~5S, Soldering Area>95%.
- Environmental requirements: RoHS2.0&HF.**
- ORDER INFORMATION:**

N2A-F A833 D R 9 A 1-00 xx
1 2 3 4 5 6 7 8 9 10

- N2A: USB 2.0 A TYPE
- F: FEMALE
- A838: 板上中心高8.33mm
- D: DIP
- R: 90°
- 9: PA9T
- COLOR A: 黑色
- 8.1: 青蛙脚
- 9.TYPE 码: 00: 普通规格
- Contact Area plating on contacts
01: G/F 03: Au 3u"
05: Au 5u" 10: Au 10u"
15: Au 15u" 30: Au 30u"

USB2.0 CONTACT PIN					
PIN NO.	1/5	2/6	3/7	4/8	Shell
NAME	VBUS	D-	D+	GND	Shield

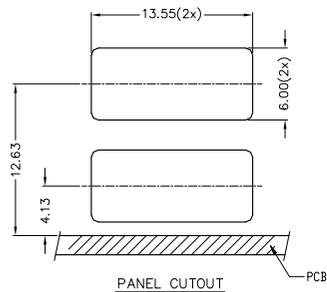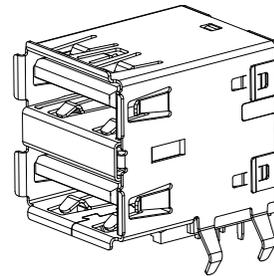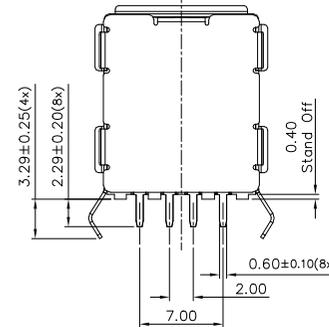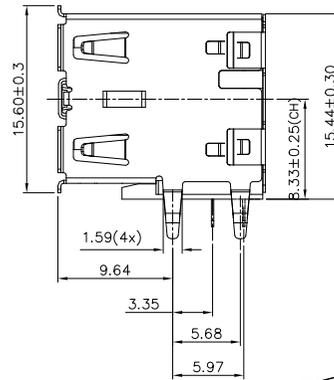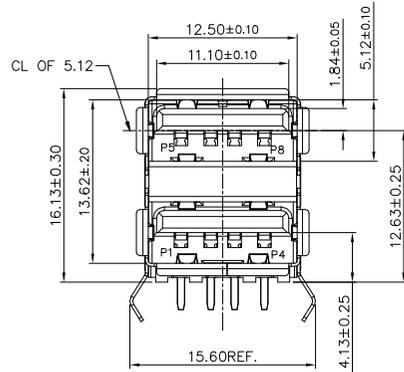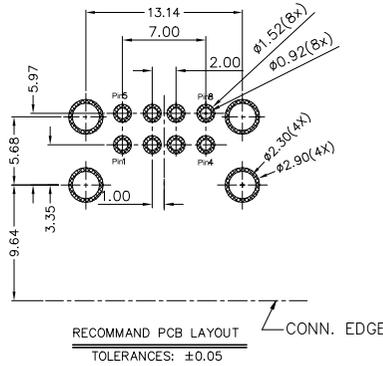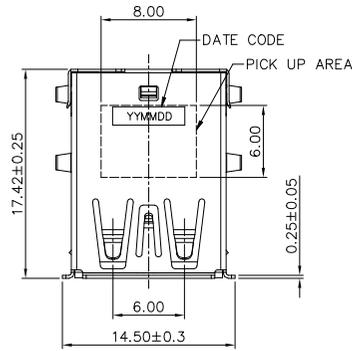

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
A0	新图面发行	21.12.24	LINEAR	ANGLES	1:1	Frey Yang	21.12.27	N2A-FA833DR9A1-0001	ENDE05				
A1	更新插拔寿命 ▲	21.12.27	0.0±0.30	X° REF±6°	APPROVED	Daniel Dong	21.12.27	TITLE DUAL STACK USB 2.0 A TYPE RECEPTACLE STD RA DIP C/H=8.33mm		REV	AO	SHEET	1/1
			0.00±0.25	X° ±3°	DESIGNER	Micky Ma	21.12.27						
			0.000±0.10	X° X' ±2°	DRAWN								


环保物料

PACKAGING INSTRUCTION:



1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON
ALL CARTONS CLOSURES MUST BE DONE WITH TAPE.
2. FILL PACKAGING REEL WITH THE QUANTITIES AS INDICATED IN THE CHART.

PRODUCT P/N	PARTS PER SHIPPING CARTON	PARTS PER TRAY (S.P.Q.)	TOTAL TRAYS PER PRIMARY CARTON
N2A-FA833DR9A1-00xx	1120(PCS)	56 (PCS)	20


1. 56pcs/盘

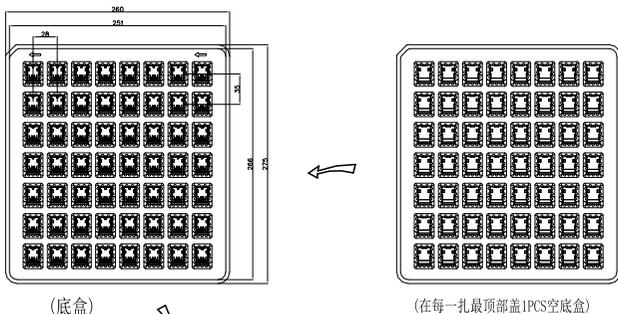


2. 10盘/扎
(560pcs)

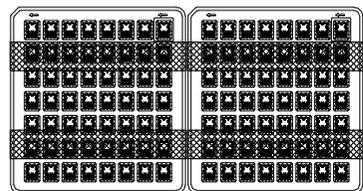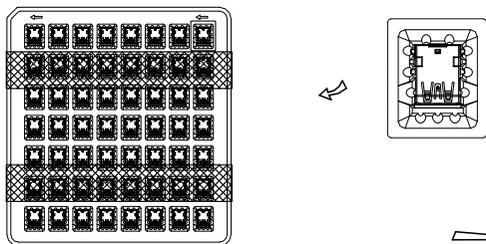


3. 2 扎并排/箱
(1120pcs)

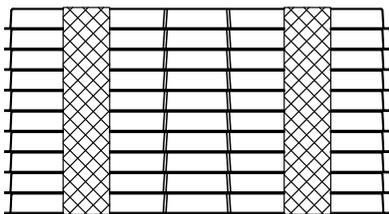

5. 外箱封成“工”字型

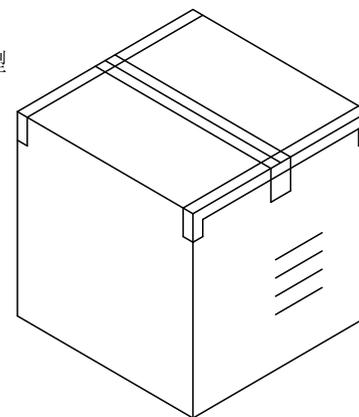

4. 1120pcs/箱

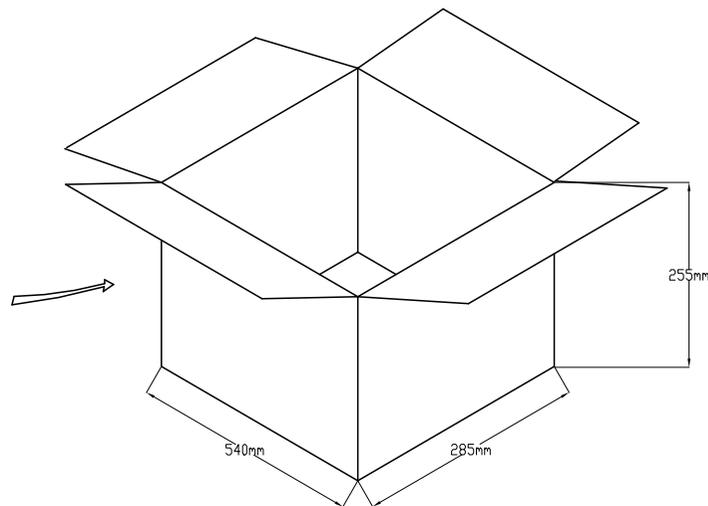

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
AO	新图面发行	21.12.27		LINEAR	ANGLES	1:1								
				0.0±0.30	X° REF±6°	APPROVED	Frey Yang	21.12.27	N2A-FA833DR9A1-0001	ENDE05	REV	AO	SHEET	1/1
			SIZE: A4	0.00±0.25	X° ±3°	DESIGNER	Daniel Dong	21.12.27	TITLE					
				0.000±0.10	X° X' ±2°	DRAWN	Micky Ma	21.12.27	DUAL STACK USB 2.0 A TYPE RECEPTACLE STD RA DIP C/H=8.38mm					

1

2

3

4

5

6

7

8