
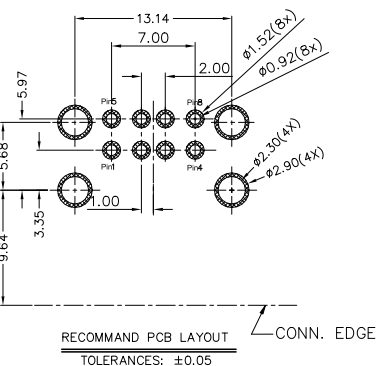


环保物料





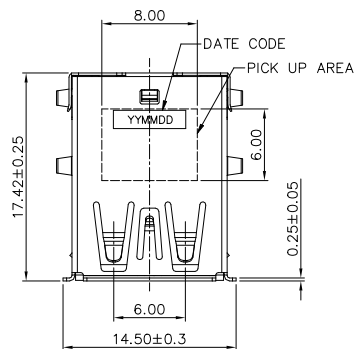


- NOTES:
- MATERIAL AND PLATING:
Housing/Cover: PA9T+30%G.F,UL94V-0,Black.
Contact: C5191 T=0.2mm,Gold 10u"Plating On Contact Area
100u" Min. Tin Plating On Solderails
50u" Min. Nickel Underplating Over All.
Front Shell: SUS201 T=0.25mm, 50u" Nickel Plated.
Middle Shell: SUS201 T=0.25mm, No Plated.
 - MECHANICAL CHARACTERISTIC
Mating Force: 35N(3.57Kg) Max.
Unmating Force: 10N(1.02Kg) Min(Initial);
8N(0.816Kg) Min(After).
 - ELECTRICAL CHARACTERISTIC
Durability: 5000 Cycles.
Current Rating: 1.5A
Voltage Rating: 30V AC Max.
Contact Resistance: 30m Ohm Max.
Insulation Resistance: 1000M Ohm Min.
Dielectric Withstanding Voltage: 500V AC.
 - TEMPERATURE
Operating Temperature: -40°C~+85°C
Storage Temperature: -60°C~+105°C
 - DATECODE INFORMATION:
YYMMDD (Y:YEAR M:MONTH D:DATE)
 - IR CONDITIONS:
265±5%,10s, Twice.
 - SALT SPRAY:
Shell: 48h; Contact Area: 48h; Solder Area: 12h.
 - Solderability:
245±5%, 3~5S, Soldering Area≥95%.
 - Environmental requirements: RoHS2.0&HF.
 - ORDER INFORMATION:

N2A-F A833 D R 9 A 1-00 xx
1 2 3 4 5 6 7 8 9 10

- N2A: USB 2.0 A TYPE
- F: FEMALE
- A838: 板上中心高8.33mm
- D: DIP
- R: 90°
- PA9T
- COLOR A: 黑色
- 1: 青蛙脚
- TYPE 码: 00: 普通规格
- Contact Area plating on contacts
01: G/F 03: Au 3u"
05: Au 5u" 10: Au 10u"
15: Au 15u" 30: Au 30u"

USB2.0 CONTACT PIN					
PIN NO.	1/5	2/6	3/7	4/8	Shell
NAME	VBUS	D-	D+	GND	Shield

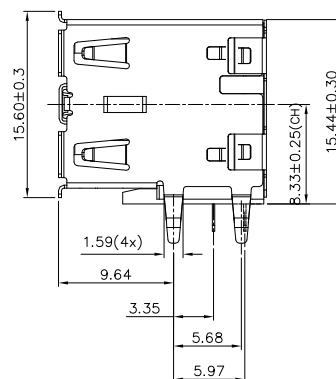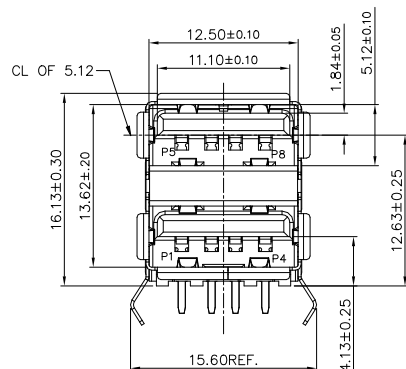

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	JCTC® TERMINAL&CONNECTORS			
				LINEAR	ANGLES	1:1								
A0	新图面发行	21.12.24	UNIT: MM SIZE: A4	0.0±0.30	X° REF±6°	APPROVED	Frey Yang	21.12.27	N2A-FA833DR9A1-0010	ENDE05	REV	A0	SHEET	1/1
A1	更新插拔寿命	21.12.27		0.00±0.25	X° ±3°	DESIGNER	Daniel Dong	21.12.27						
				0.000±0.10	X° X' ±2°	DRAWN	Micky Ma	21.12.27						

TITLE
DUAL STACK USB 2.0 A TYPE
RECEPTACLE STD RA DIP C/H=8.38mm


环保物料

PACKAGING INSTRUCTION:


1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON
ALL CARTONS CLOSURES MUST BE DONE WITH TAPE.
2. FILL PACKAGING REEL WITH THE QUANTITIES AS INDICATED
IN THE CHART.

PRODUCT P/N	PARTS PER SHIPPING CARTON	PARTS PER TRAY (S.P.Q.)	TOTAL TRAYS PER PRIMARY CARTON
N2A-FA833DR9A1-00xx	1120(PCS)	56 (PCS)	20


1. 56pcs/盘

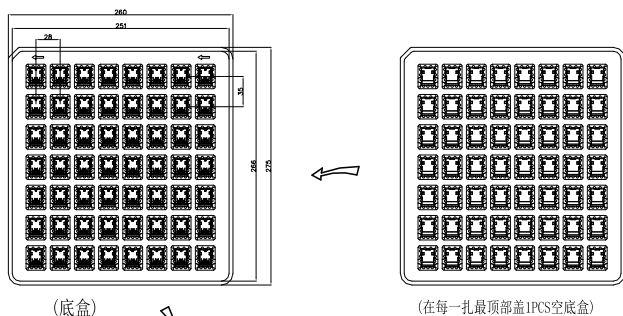


2. 10盘/扎
(560pcs)

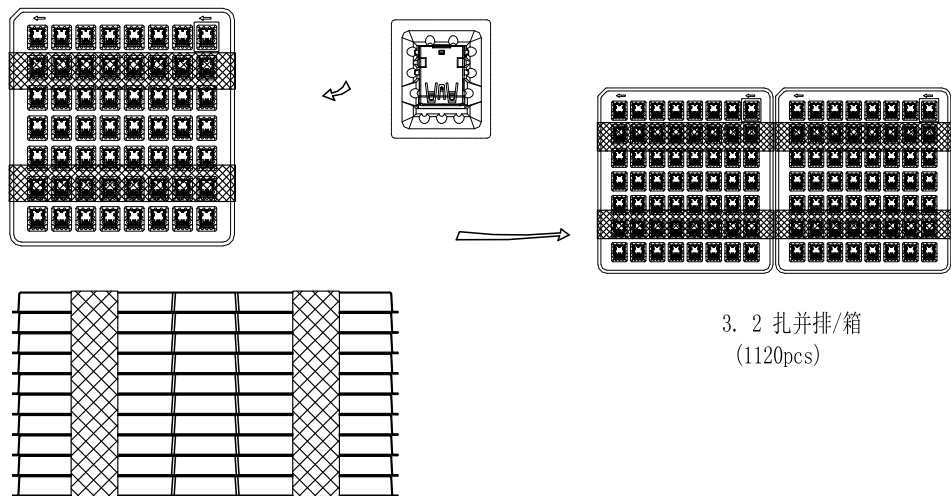

5. 外箱封成“工”字型

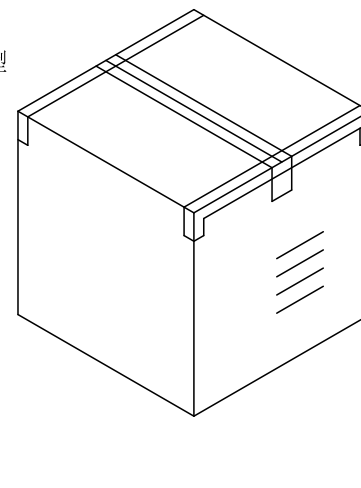

4. 1120pcs/箱

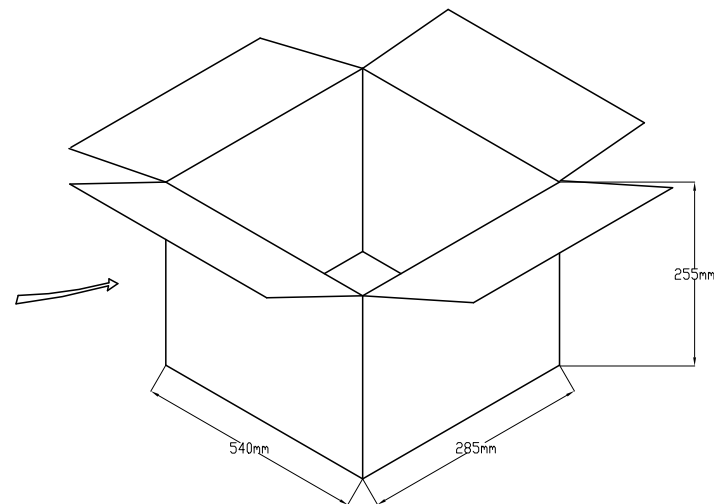

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS				
A0	新图面发行	21.12.27		LINEAR	ANGLES	APPROVED	Frey Yang	21.12.27	N2A-FA833DR9A1-0010	ENDE05					
				0.0±0.30	X° REF±6°	DESIGNER	Daniel Dong	21.12.27	TITLE DUAL STACK USB 2.0 A TYPE RECEPTACLE STD RA DIP C/H=8.38mm						
				0.00±0.25	X° ±3°		Micky Ma	21.12.27							
				UNIT: MM	0.00±0.25	X° ±3°									
			SIZE: A4	0.000±0.10	X° X' ±2°	DRAWN	Micky Ma	21.12.27				REV	A0	SHEET	1/1