

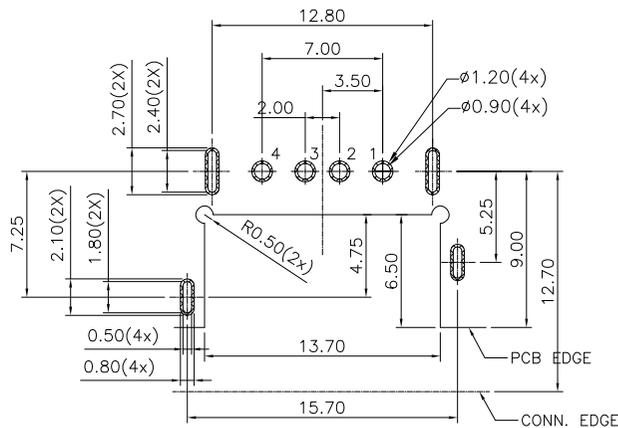
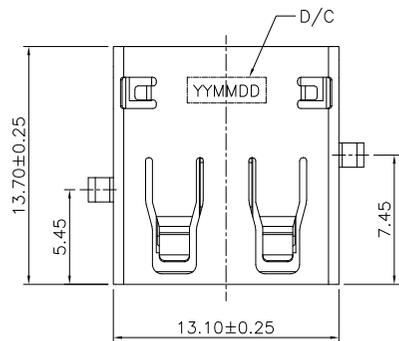
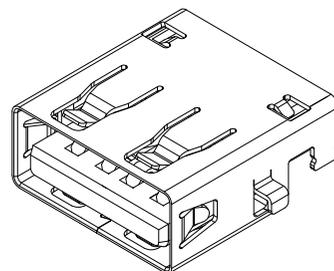
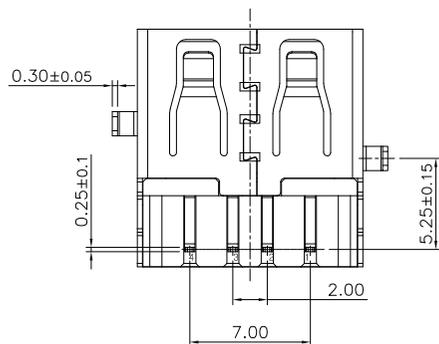
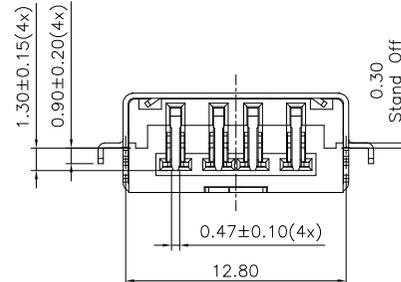


环保物料

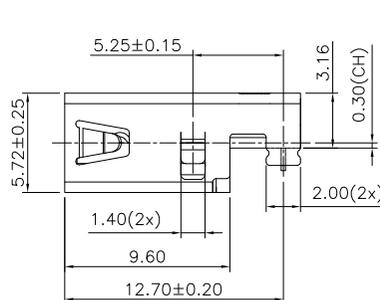

RECOMMENDED PCB LAYOUT (TOP VIEW)
GENERAL TOLERANCES:±0.05

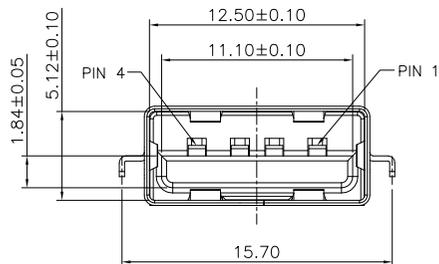

Contact Number	Signal Name
PIN1	VBUS
PIN2	D-
PIN3	D+
PIN4	GND
Shell	Shield

Contact Number	Signal Name
PIN1	VBUS
PIN2	D-
PIN3	D+
PIN4	GND
Shell	Shield

NOTES:

- MATERIAL:**
Housing: LCP+30%G.F.UL94V-0,Black.
Contact: C2680.
Shell: SK7.
- PLATING:**
Contact: Au Plated on Contact Area,
Matte-Sn 100u" Plated on Solder Tails.
Ni 50u" min UnderPlated.
Shell: Ni 50u"Min Plated All Over
- MECHANICAL CHARACTERISTIC**
Mating Force: 35N(3.57KgF) max.
Unmating Force: 9.8N(1KgF) min.
Durability: 1500 Cycles.
- ELECTRICAL CHARACTERISTIC**
Contact Resistance: 30m Ohm Max.
Insulation Resistance: 1000M Ohm Min
Dielectric Withstanding Voltage: 500V AC Min
- TEMPERATURE**
Operating Temperature: -40°C~+85°C
Storage Temperature: -60°C~+105°C
- ORDER INFORMATION:**

N2A-F C030 D R L A 3-00 01
1 2 3 4 5 6 7 8 9 10

- N2A:USB 2.0 A TYPE
- F:FEMALE
- C030=沉板0.30mm
- D:DIP
- R:90°
- L:LCP
- COLOR A:黑色
- 3:直角
- TYPE码: 00:普通规格
- Contact Area plating on contacts
01: G/F

REV.	REVISION RECORD	DATE	SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
A0	新图面发行	21.11.25	1:1	Micky Ma	21.11.25	N2A-FC030DRLA3-0001	ENDE05				
			APPROVED		21.11.25	TITLE		USB2.0 AF R/A DIP REVERSE TYPE CH=0.3mm			
			DESIGNER		21.11.25	DRAWN					
			UNIT: MM					REV	A0	SHEET	1/1
			SIZE: A4								

环保物料


PACKAGING INSTRUCTION:

1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON
ALL CARTONS CLOSURES MUST BE DONE WITH TAPE.
2. FILL PACKAGING REEL WITH THE QUANTITIES AS INDICATED
IN THE CHART.



PRODUCT P/N	PARTS PER SHIPPING CARTON	PARTS PER REEL (S.P.Q.)	TOTAL REELS PER PRIMARY CARTON
N2A-FC030DRLA3-00xx	4000 (PCS)	400 (PCS)	10

1. QUANTITY: 400 PCS

2. COVER TAPE PEELING FORCE:

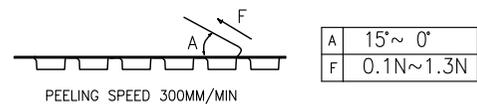

3. PART DIMENSIONS MEET EIA-481-D REQUIREMENT

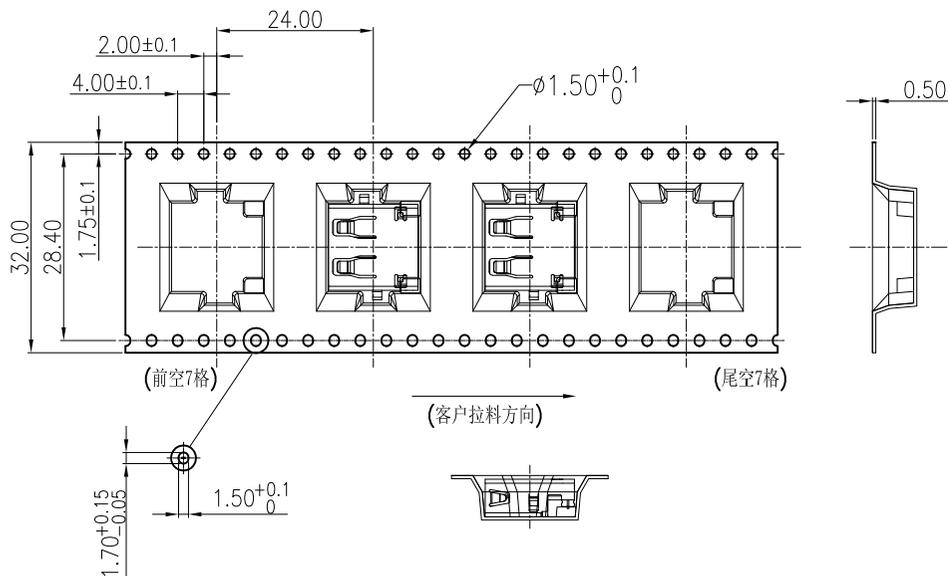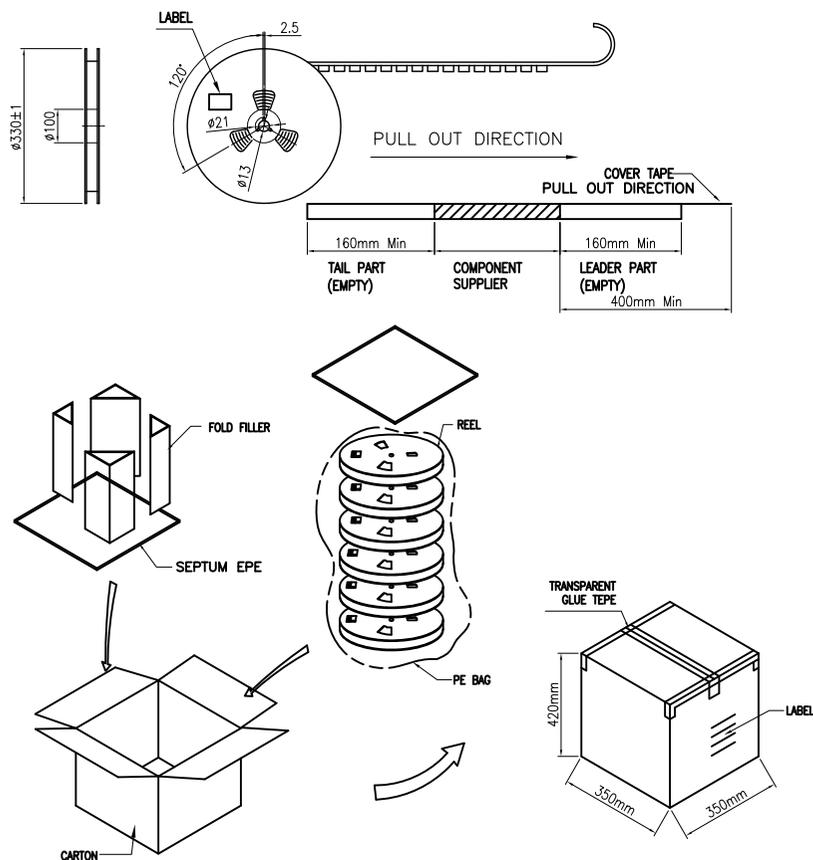

REV.	REVISION RECORD	DATE	UNIT: MM SIZE: A4	GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
A0	新图面发行	21.11.25		LINEAR	ANGLES	APPROVED		21.11.25	N2A-FC030DRLA3-00xx	ENDE05				
				0.00±0.15	X° REF±6°	DESIGNER		21.11.25	TITLE		REV	AO	SHEET	1/1
				0.00±0.10	X° X'±2°	DRAWN	Micky Ma	21.11.25	USB2.0 AF R/A DIP REVERSE TYPE CH=0.3mm					

1

2

3

4

5

6

7

8