

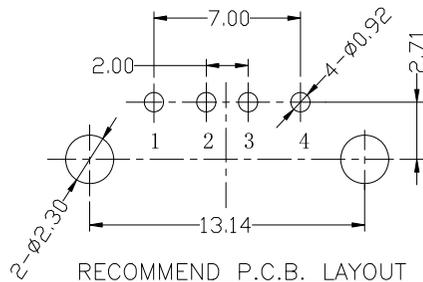
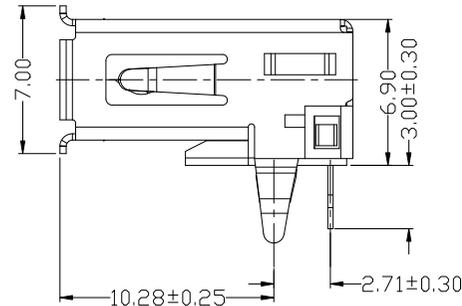
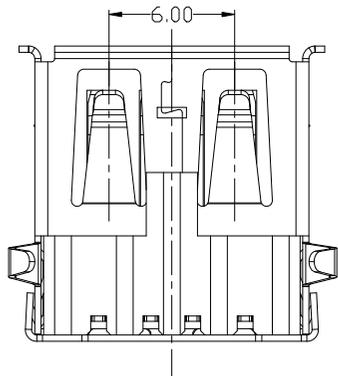
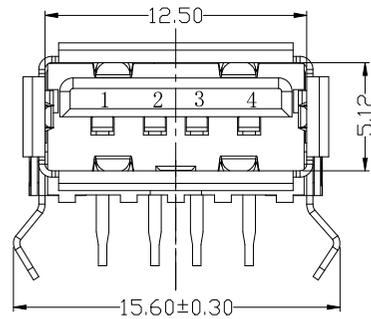


环保物料

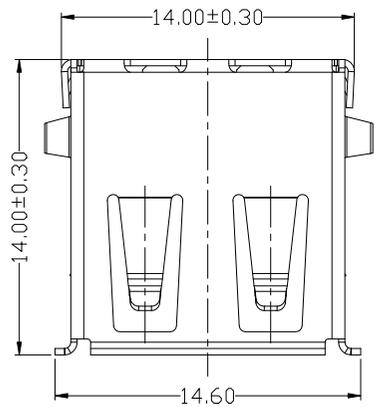

RECOMMEND P.C.B. LAYOUT
TOLERANCE ±0.05

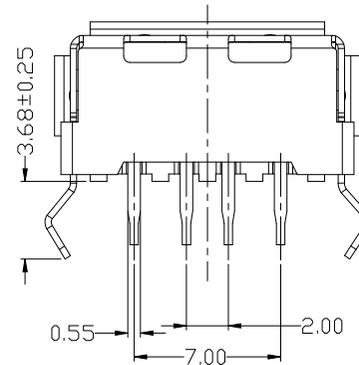

NOTES:

1. MATERIAL SPECIFICATION:

- 1) HOUSING: LCP, UL94V-0.
- 2) SHELL: COPPER ALLOY T=0.30mm
- 3) CONTACT: COPPER ALLOY T=0.25mm

2. PLATING:

- 1) CONTACT :
G/F GOLD PLATING ON CONTACT AREA
80u"Min Tin PLATING ON SOLDER TAILS
50u"Min.Nickel UNDERPLATING OVER ALL
- 2) SHELL: 50u"Min.Nickel Underplated Over All

3. ELECTRICAL CHARACTERISTIC:

- 1) CURRENT RATING: 1.5A;
- 2) INSULATION RESISTANCE: 1000MΩ, MIN;
- 3) CONTACT RESISTANCE: 30mΩ, MAX;
- 4) DIELECTRIC WITHSTANDING VOLTAGE: 500V AC;

4. MACHINE CHARACTERISTICS:




- 1) MATING FORCE: 3.57 Kgf MAX
- 2) UNMATING FORCE: 1.02 Kgf MIN.

N2A	-F	F400	D	R	L	A	1	-03	01
1	2	3	4	5	6	7	8	9	10

- 1.N2A:USB 2.0 A TYPE
- 2.F:FEMALE
- 3.F400=反向中心高4.00mm
- 4.D:DIP
- 5.R:90°
- 6.L:LCP
- 7.COLOR A:黑色
- 8.外壳脚1:青蛙脚
- 9.TYPE码: 03:普通规格
- 10.Contact Area plating on contacts
01: G/F

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
AO	The new version file were released	2021.05.13		LINEAR	ANGLES	APPROVED	Frey Yang	2022.09.21	N2A-FF400DRLA1-0301	ENDE05				
A1	更新规格发行	2022.09.21	0.00±0.30	X° REF±6°	DESIGNER	Daniel Dong	2022.09.21	TITLE						
			0.00±0.20	X° ±3°	DRAWN	Li Xing Ze	2022.09.21	USB AF 90° 弯脚外扣式						
			SIZE: A4	0.000±0.10	X° X' ±2°						REV	A1	SHEET	1/1

环保物料

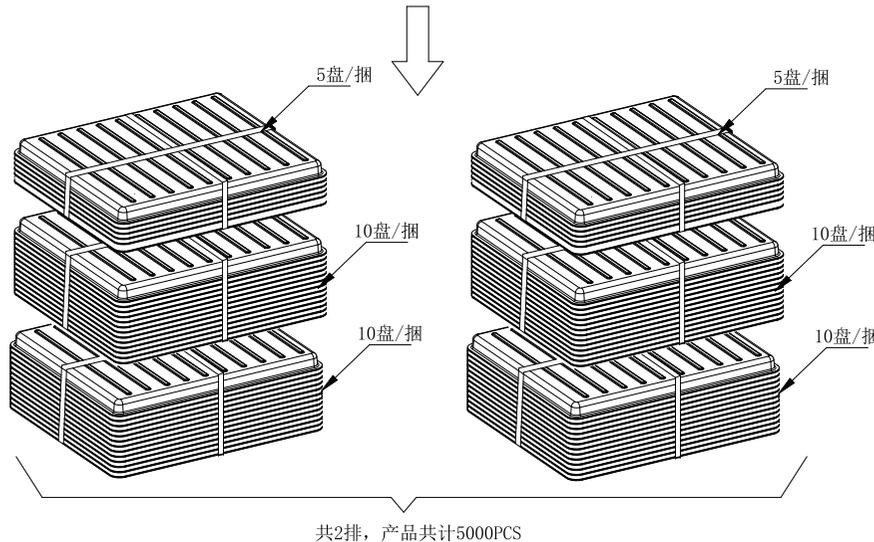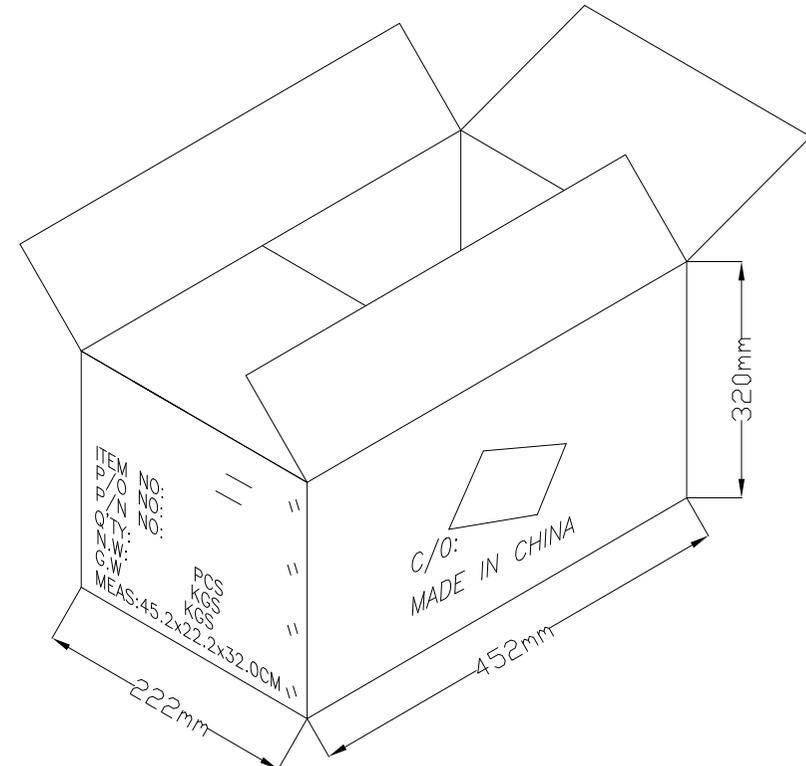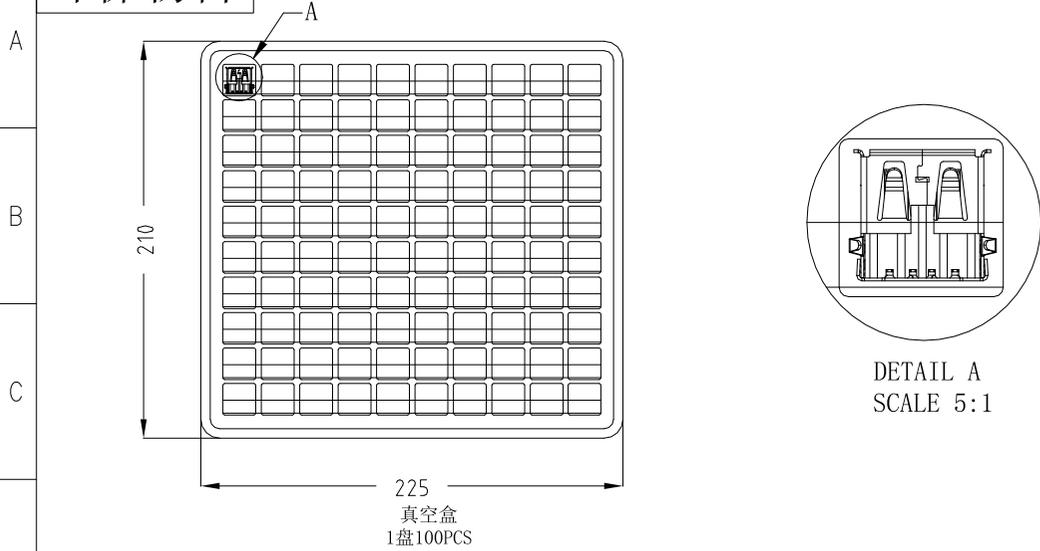

- NOTES:
1. 每盘装产品100PCS.
 2. 每10盘为1捆用PE膜缠绕, 共4捆; 每5盘为1捆用PE膜缠绕, 共2捆 每3捆为一组 (产品2500PCS) 共两组并排放入纸箱内, 产品共计5000PCS.
 3. 用封箱胶纸封住纸箱中间及两头, 在纸箱相应位置贴上出货标签.
 4. 真空盒规格: 210*225mm
纸箱规格: 452*222*320mm

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 JCTC [®] TERMINAL&CONNECTORS			
				LINEAR	ANGLES	1:1								
AO	The new version file were released	2021.05.13		0.0±0.30	X° REF±6°	APPROVED			N2A-FF400DRLA1-0301	ENDE05				
A1	更新图框发行	2022.09.21		0.00±0.20	X° ±3°	DESIGNER			TITLE					
				0.000±0.10	X° X' ±2°	DRAWN	Li Xing Ze	2022.11.01	USB AF 90° 弯脚外扣式					
			UNIT: MM								REV	A1	SHEET	1/1