

环保物料

A

B

C

D

E

F

G

H

A

B

C








D

E

F

G

H

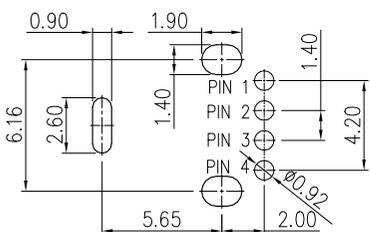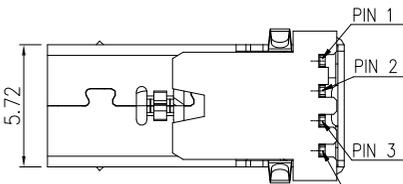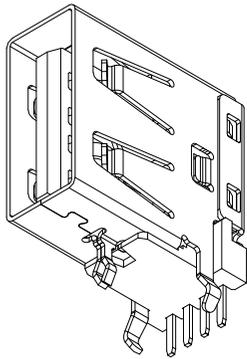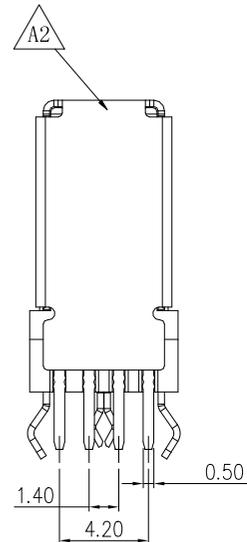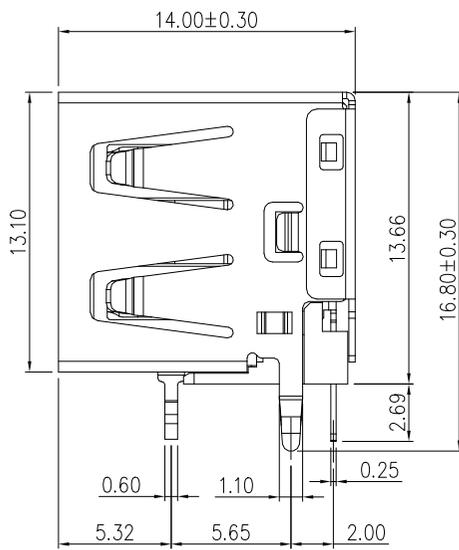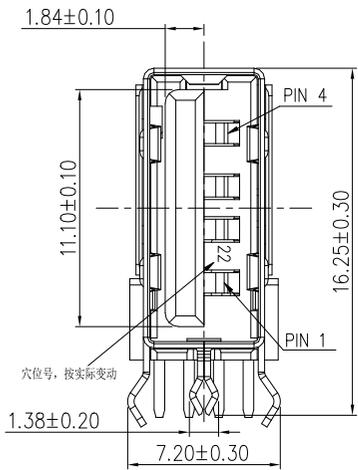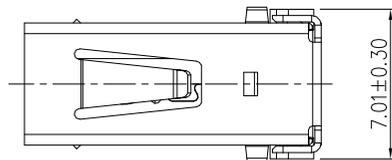

ELECTRICAL CHARACTERISTICS:  
 CONTACT CURRENT RATING : 1.5AMPERES.  
 DIELECTRIC WITHSTANDING VOLTAGE : AC 500V R.M.S.  
 INSULATION RESISTANCE : 1000 MEGOHMS MINIMUM AT DC 500V.  
 CONTACT RESISTANCE : 30 MILLIOHM MAXIMUM.  
 OPERATING TEMPERATURE : -40°TO +85°.

MECHANICAL CHARACTERISTICS:  
 CONTACT INSERTION FORCE : 3.57KG MAXIMUM.  
 CONTACT SEPARATION FORCE : 1.0KG MINIMUM.

MATERIALS:  
 HOUSING: PBT+30% G/F Black  
 CONTACT: BRASS C2680.  
 SHELL: SPCC/BRASS C2680;  
 CONTACTS: GOLD FLASHED 1U",3U",5U",10U",15U",30U".  
 END OF NI-50U"MIN  
 SHELL: NICKEL PLATED OVER 30~100U" MIN.

N2A-F	H000	D	R	B	X	1-XX	XX		
1	2	3	4	5	6	7	8	9	10

- 1.N2A:USB 2.0 A TYPE
  - 2.F:FEMALE
  - 3.H000= 侧插规格
  - 4.D:DIP
  - 5.R: 90°
  - 6.B:PBT
  - 7.COLOR A: 黑色 W: 白色 B: 兰色
  - 8.外壳脚: 青蛙脚
  - 9.TYPE码:A0: 不带翻边, SHELL材质SPCC  
AP: 不带翻边, SHELL材质C2680
  - 10.Contact Area plating on contacts
- |             |             |
|-------------|-------------|
| 01: G/F     | 03: Au 3u"  |
| 05: Au 5u"  | 10: Au 10u" |
| 15: Au 15u" | 30: Au 30u" |

RECOMMENDED PCB LAYOUT(BOTTOM VIEW)  
 THICKNESS 1.60MM;DEFAULT TOLERANCE:±0.05

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.						
A0	新图面发行	18.08.16		LINEAR	1:1	APPROVED		N2A-FH000RBA1-A001	ENDE05						
A1	换图框发行	23.06.14		ANGLES											
A2	按实物更新图面	23.06.16	UNIT: MM	0.00±0.25	X° REF±6°	DESIGNER		TITLE							
A3	料号增加SHELL材质说明	23.08.15	SIZE: A4	0.000±0.10	X° X'±2°	DRAWN	Dalan Dai	23.08.15	USB AF 侧插短体90度DIP"0"型脚无卷边						

1

2

3

4

5

6

7

8

REV A3 SHEET 1/1

