
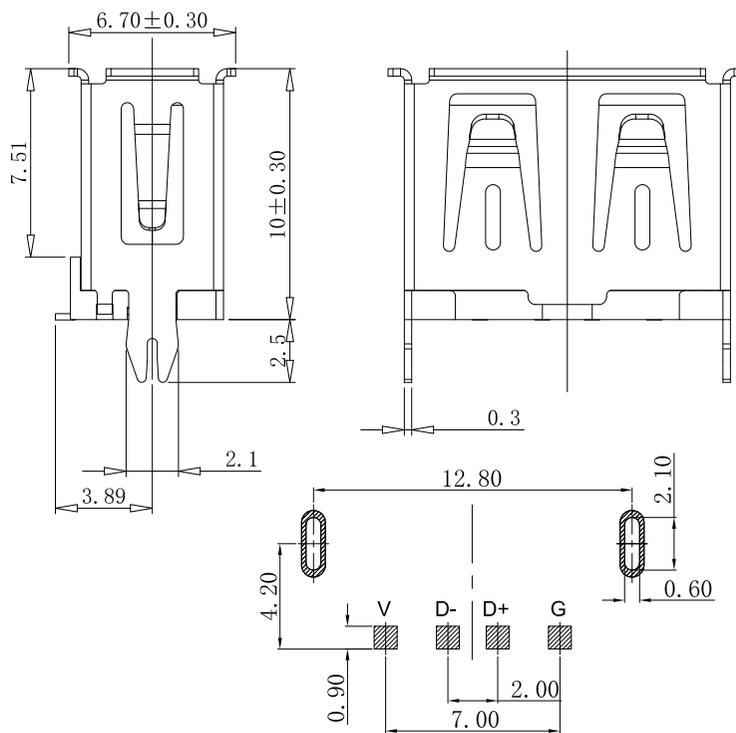
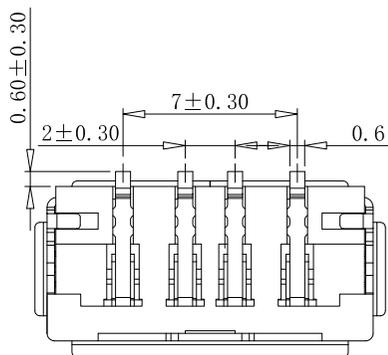
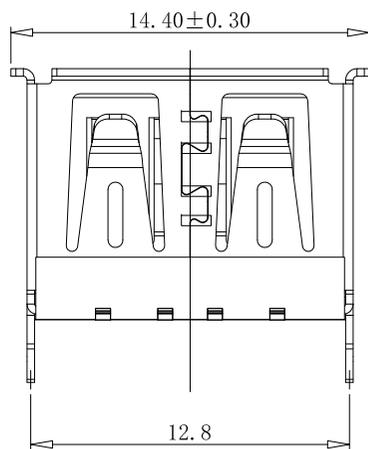


环保物料

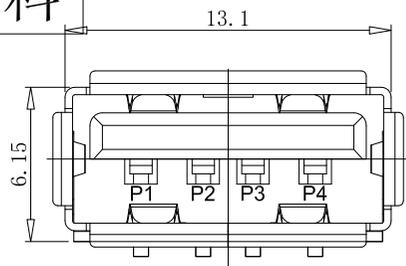

RECOMMENDED P.C.B LAYOUT  
P.C.B TOLERANCE:±0.05

1.机械性能:

插入力:3.57kg MAX  
拔出力:1.02kg MIN  
工作温度:0℃~+50℃  
储存温度: -20℃~60℃

2.电气性能:

额定电流:DC 5A Max.(P1/P5)  
接触阻抗:30 mΩ Max.  
耐高压:500V AC 1分钟 Min.无击穿, 无电弧  
绝缘阻抗:1000 MΩ Min.


N2A-F L100 S R L A 2-00 01  
1 2 3 4 5 6 7 8 9 10

1. N2A:USB 2.0 A TYPE
- 2.F:FEMALE
- 3.L100=直立式 板上高度10.00mm
- 4.S:SMT
- 5.R:180°
- 6.L:LCP
- 7.COLOR A:黑色
- 8.2:鱼叉脚
- 9.TYPE码: 00:普通规格
- 10.Contact Area plating on contacts  
01: G/F


REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO:	DWG NO.		
AO	New drawing release	20.11.02		LINEAR	ANGLES	APPROVED			N2A-FL100SRLA2-0001	ENDE05		
A1	换图框发行	23.08.27	UNIT: MM	0.00±0.20	X° REF±/°	DESIGNER			TITLE: USB AF 立式SMT有卷边(H=10.0MM)			
			SIZE: A4	0.000±0.10	X° X'±1°	DRAWN	Xiao	23.08.27	REV	A1		SHEET

包装方式如下图:


- 一.  
1) 把已全检好的USB AF 立式SMT成品,装入专用的吸塑盘内.  
每盘装100PCS, 盖上上盖.

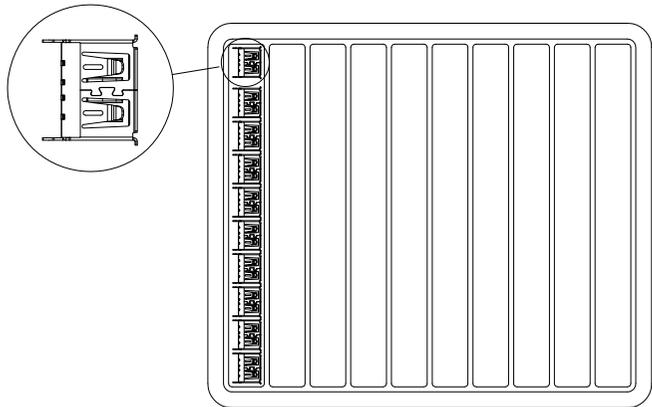


- 二..  
1) 蔚放雜成品的包坡摺依同一方向一脯脯站好.  
2) 如气所示, 每捆站放5摺和10摺誇种, 用PE膜莊蹠.



- 三.  
1) 将叠好的产品,每箱分两排先各放2捆10盘, 然后上面再各放一捆5盘, 共计50盘5000PCS.

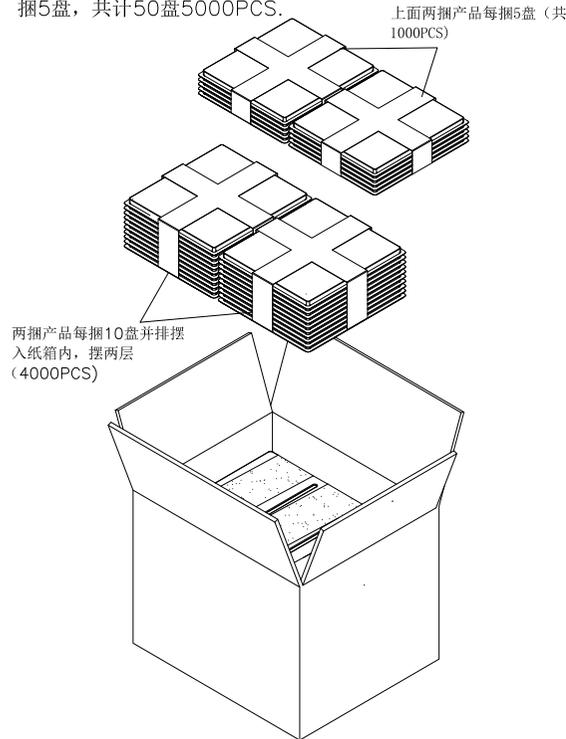

- 四.  
1) 外箱用胶带封箱并签标签.

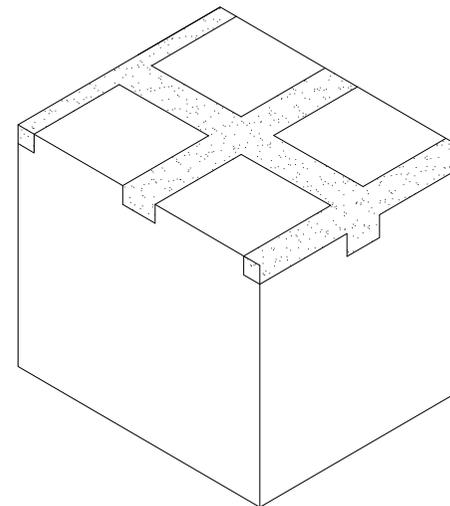

尺寸:  
320\*210\*220mm

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO:	DWG NO.			
AO	New drawing release	20.11.02		LINEAR	ANGLES	APPROVED			N2A-FL100SRLA2-0001	ENDE05			
A1	换图框发行	23.08.27	0.0 ± 0.25	X° REF ± /°	DESIGNER			TITLE:					
			UNIT: MM	0.00 ± 0.20	X° ± 2°	DRAWN	Xiao	23.08.27	USB AF 立式SMT有卷边(H=10.0MM)				
			SIZE: A4	0.000 ± 0.10	X° X' ± 1°					REV	A1	SHEET	1/1