

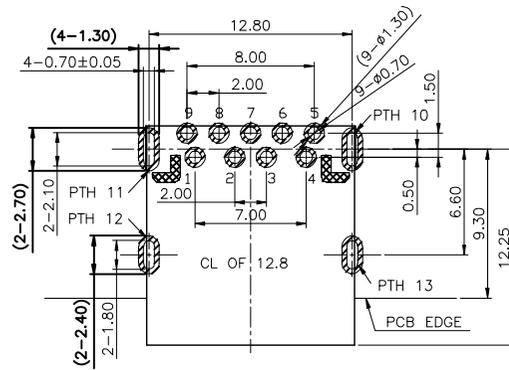
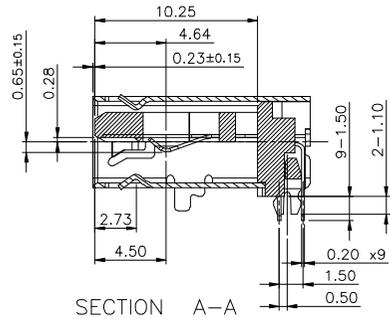

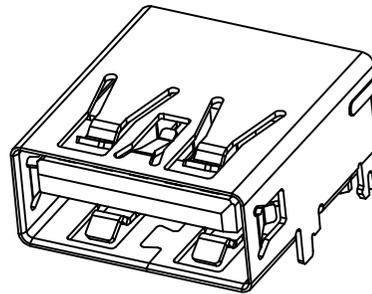
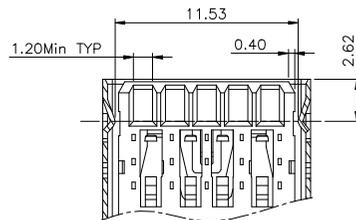
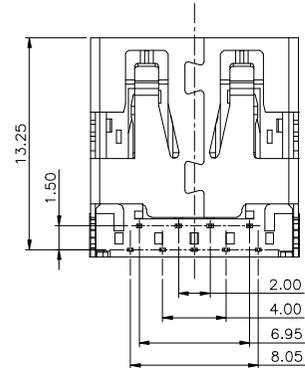


环保物料

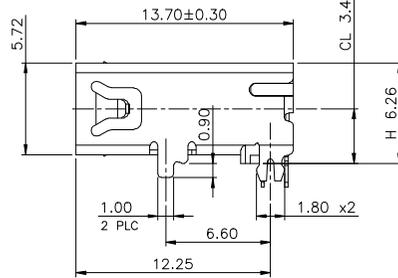

TOLERANCE: ±0.05, THICKNESS: 1.2mm
 RECOMMENDED PCB LAYOUT
 (TOP VIEW)
 KEEP OUT AREA

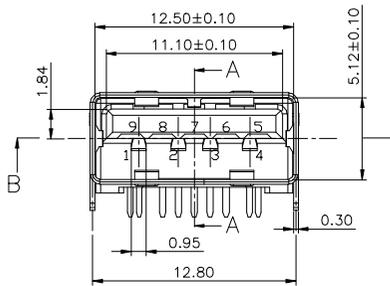

NOTE:

1.MATERIAL:

- 1.1 INSULATOR:PA9T UL 94 V-0 BLACK;
- 1.2 CONTACT:C5210-EH(T=0.20mm)
- 1.3 SHELL:SUS201(T=0.30mm)

2.ELECTRICAL CHARACTERISTICS;

- 2.1 CONTACT RESISTANCE:30mΩ Max
- 2.2 CONTACT CURRENT RATING:1.5A
- 2.3 DIELECTRIC WITHSTANDING VOLTAGE:500 V

R.M.S.

- 2.4 INSULATION RESISTANCE 100 MEGOHMS Min
- 2.5 OPERATING TEMPERATURE:-40°C ~ 85°C

3 MECHANICAL CHARACTERISTICS:

- 3.1 MATING FORCE:35 N Max
- 3.2 UNMATED FORCE:10 N Min INITIAL; 8 N Min AFTER TEST

3.3 DURABILITY:5,000 CYCLES

4.PLATING

- 4.1 TERMINAL CONTACT:(SEE TAB) GOLD PLATING ALL OVER 50u" MIN NICKEL AND 80u"MIN Tin ALL OVER 50u" MIN NICKEL ON SOLDER AREA
- 4.2 SHELL:50u"MIN.NICEL ALL OVER

5.PART NUMBER:

N3A-F A340 D R 9 A 2-00 xx
 1 2 3 4 5 6 7 8 9 10

1.N3A:USB 3.0 A TYPE

2.F:FEMALE

3.A340:普通规格

4.D:DIP

5.R:90°

6.9:9T

7.COLOR A:黑色

8.外壳脚 2:鱼叉脚

9.TYPE码: 00:普通规格

10.Contact Area plating on contacts

01: G/F 05: Au 5u"



10: Au 10u" 15: Au 15u"

30: Au 30u"


Pin #	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SS ⁺ X-
6	StdA_SS ⁻ X+
7	GND_DRAIN
8	StdA_SST ⁻ X-
9	StdA_SST ⁺ X+
Shell	Shield

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.	 TERMINAL & CONNECTORS			
				LINEAR	ANGLES									
A0	新图面发行	21.10.14	 UNIT: MM SIZE: A4	0.0±0.30	X° REF±6°	APPROVED	Frey Yang	23.01.09	N3A-FA340DR9A2-00xx	ENDE05	REV A1 SHEET 1/1			
A1	图框升级	23.01.09		0.00±0.20	X° ±3°	DESIGNER	Daniel Dong	23.01.09						
				0.000±0.10	X° X' ±2°	DRAWN	Micky Ma	23.01.09						
									TITLE USB 3.1 CONNECTOR AF H6.26 L13.7 CL3.40MM STD DIP TYPE					

环保物料

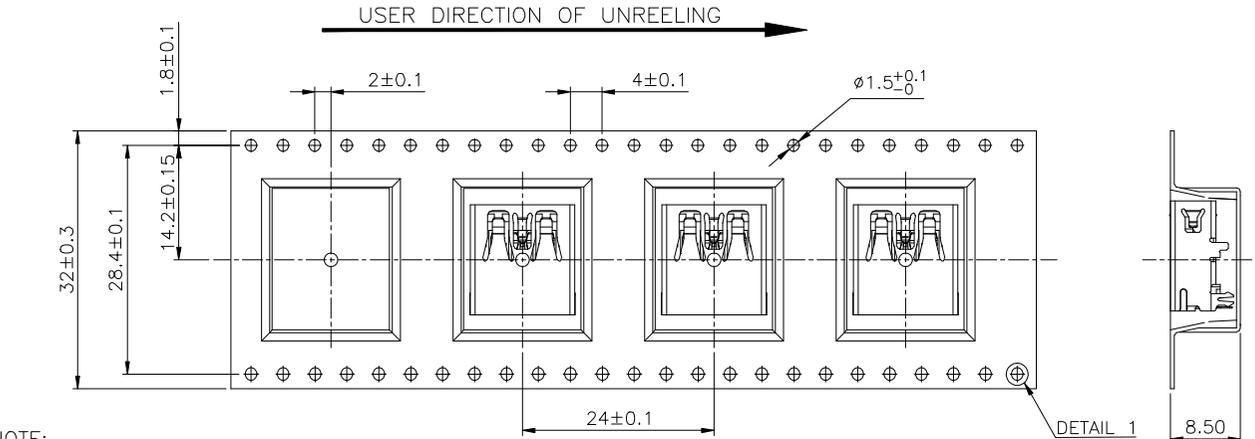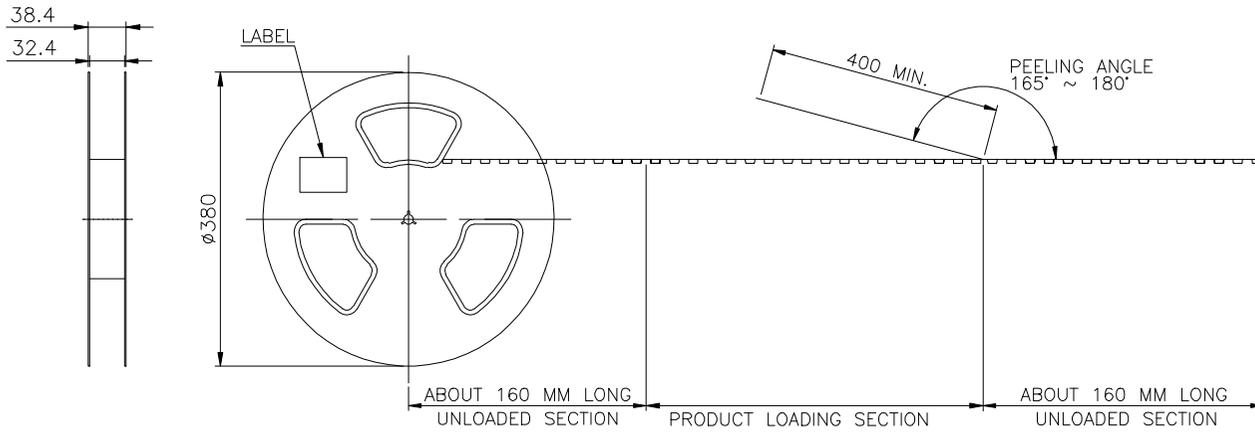

- NOTE:
- MATERIAL:
 BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL.
 TAPE: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 120°C, BLACK COLOR.
 REEL: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 70°C, BLUE COLOR.
 BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C.
 - PEELING STRENGTH: 0.1 ~ 1.3 N (10 ~ 130 GRAMS)
 - PEELING SPEED: 300 mm/min.
 - EACH BAG SHALL BE INCLUDED DESICCANT.

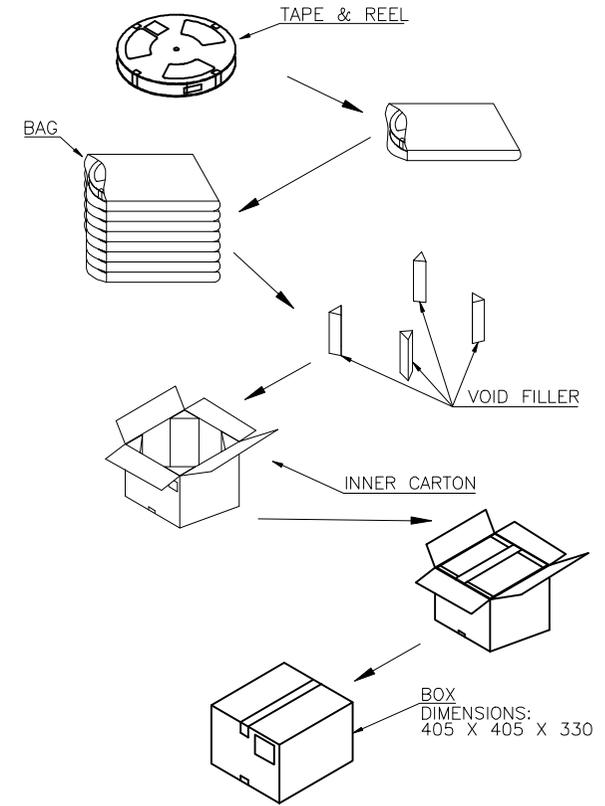

400	8	3200 PCS	KG	KG
PCS/REEL	REELS/CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.			
				LINEAR	ANGLES	1:1							
A0	新图面发行	21.10.14		0.0±0.30	X° REF±6°	APPROVED	Frey Yang	23.01.09	N3A-FA340DR9A2-00xx	ENDE05	JCTC [®] TERMINAL & CONNECTORS		
A1	图框升级	23.01.09		0.00±0.20	X° ±3°	DESIGNER	Daniel Dong	23.01.09					
			SIZE: A4	0.000±0.10	X° X' ±2°	DRAWN	Micky Ma	23.01.09					
TITLE: USB 3.1 CONNECTOR AF H6.26 L13.7 CL3.40MM STD DIP TYPE										REV	A1	SHEET	1/1