

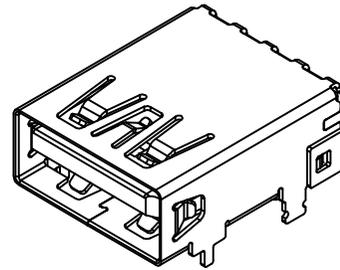
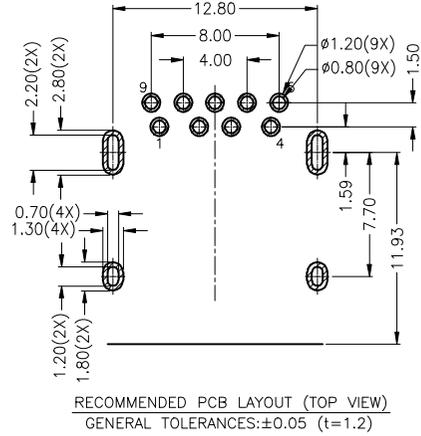


环保物料 HF




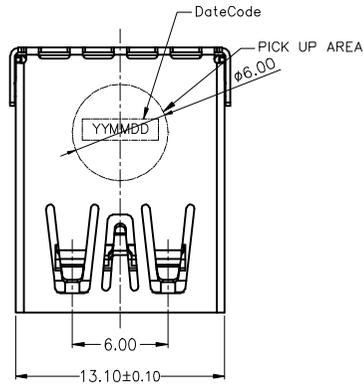


- NOTES:
- MATERIAL AND PLATING:
    - Housing: PA9T+30%G.F,UL94V-0,Black
    - Contact(4Pin): Phosphor Bronze,Au And Sn Plated.
    - Contact(5Pin): Brass,Au And Sn Plated.
    - Shell: Stainless Steel,Ni Plated All Over.
  - MECHANICAL CHARACTERISTIC
    - Mating Force: 35N(3.57Kgf) Max.
    - Unmating Force: 10N(1.02Kgf) Min.
    - Durability: 5,000 Cycles.
  - ELECTRICAL CHARACTERISTIC
    - Current Rating: 1.8A(Pin1,4), 0.25A For Other Contacts.
    - Voltage Rating: 30V AC Max.
    - Contact Resistance: 30m Ohm Max.
    - Insulation Resistance: 100M Ohm Min.
    - Dielectric Withstanding Voltage: 100V AC.
  - TEMPERATURE
    - Operating Temperature: -40°C~+85°C
    - Storage Temperature: -60°C~+105°C
  - DATECODE INFORMATION: YYMMDD (Y:YEAR M:MONTH D:DATE)
  - REFLOW PROFILE:

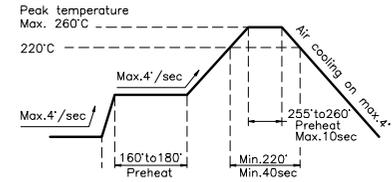

N3A-F A340 D R 9 A 3-G2 xx  
1 2 3 4 5 6 7 8 9 10

- N3A:USB 3.0 A TYPE
- F:FEMALE
- A340:板上中心高3.40mm
- D:DIP
- R:90°
- 9:9T
- COLOR A:黑色
- 外壳颜色:3:蓝色
- TYPE:高: G2:GEN 2
- Contact Area plating on contacts
  - 01: G/F
  - 03: Au 3u"
  - 05: Au 5u"
  - 10: Au 10u"
  - 15: Au 15u"
  - 30: Au 30u"

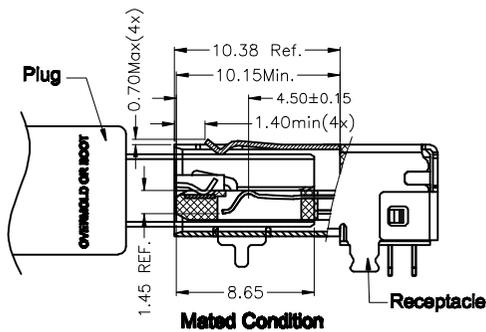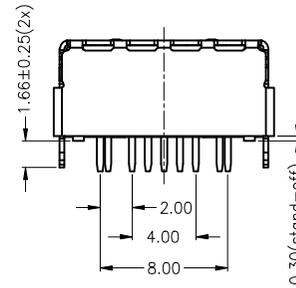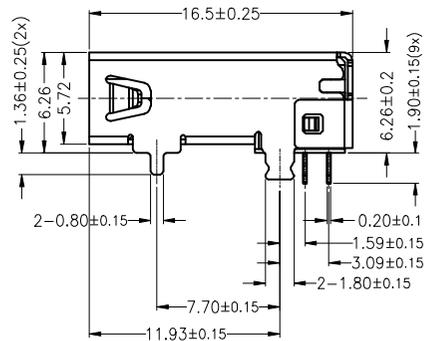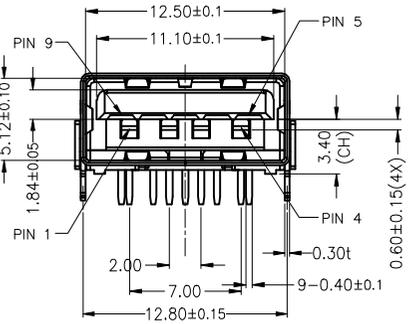

Contact Number	Signal Name
PIN1	VBUS
PIN2	D-
PIN3	D+
PIN4	GND
PIN5	SMA_SBRX-
PIN6	SMA_SBRX+
PIN7	GND_DRAIN
PIN8	SMA_SBTX-
PIN9	SMA_SBTX+
Shell	Shield

REV.	REVISION RECORD	DATE	SCALE	NAME	DATE	PART NO.	DWG NO.
A0	新图面发行	21.07.15	1:1	Frey Yang	23.08.04	N3A-FA340DR9A3-G2xx	ENDE05
A1	换图框发行	23.08.04	APPROVED	Daniel Dong	23.08.04	TITLE USB3.1 GEN2 AF R/A DIP TYPE CH=3.4mm(10G)	REV
			DESIGNER	Micky Ma	23.08.04		
			GENERAL TOLERANCES				SHEET
			L INEAR				1/1
			ANGLES				
			0.0±0.30	X° REF±6°			
			0.00±0.20	X° ±3°			
			0.000±0.10	X° X' ±2°			

