

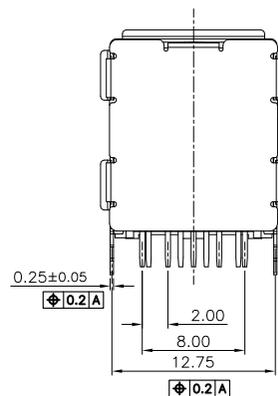
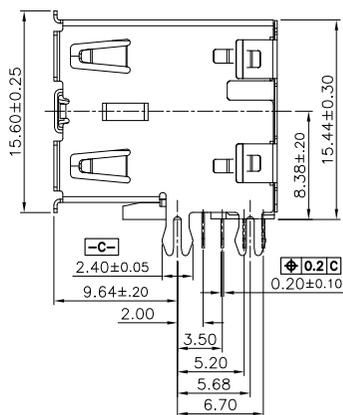
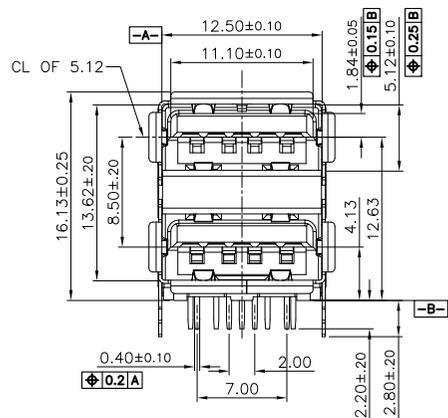
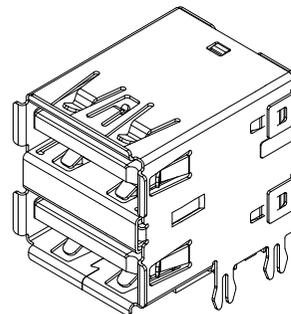
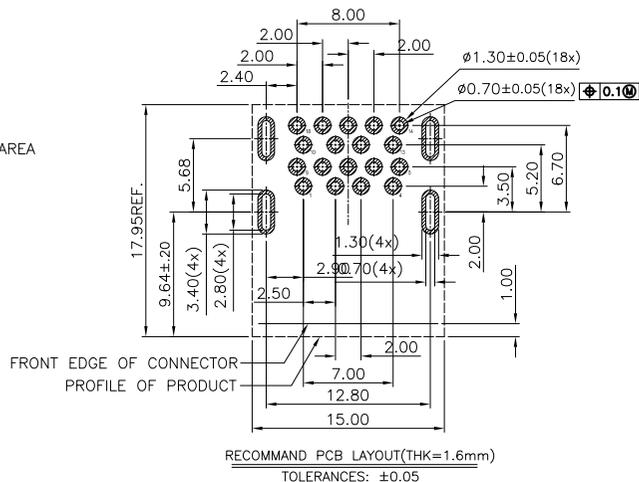


环保物料

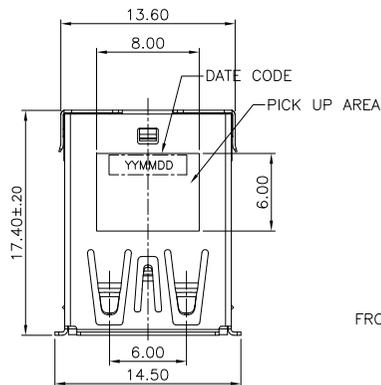

NOTES:

- MATERIAL AND PLATING:**
Housing/Cover: PA9T+30%G.F,UL94V-0,Black.
Contact: Copper Alloy,Au And Sn Plated.
Front/Back/Middle Shell: STEEL.
- MECHANICAL CHARACTERISTIC**
Mating Force: 35N(3.57Kg) Max.
Unmating Force: 10N(1.02Kg) Min.
Durability: 5,000 Cycles.
- ELECTRICAL CHARACTERISTIC**
Current Rating: 1.8A(Pin1,4),
0.25A For Other Contacts.
Voltage Rating: 30V AC Max.
Contact Resistance: 30m Ohm Max.
Insulation Resistance: 100M Ohm Min.
Dielectric Withstanding Voltage: 100V AC.
- TEMPERATURE**
Operating Temperature: -40°C~+85°C
Storage Temperature: -60°C~+105°C
- DATECODE INFORMATION:**
YMMDD (Y:YEAR M:MONTH D:DATE)
- ORDER INFORMATION:**

N3A-F A838 D R 9 A 2-A 01
1 2 3 4 5 6 7 8 9 10

- N3A:USB 3.0 A TYPE
- F:FEMALE
- A838:板上中心高8.38mm
- D:DIP
- R:90°
- 9:9T
- COLOR A:黑色
- 2:鱼叉脚
- TYPE码: A2:双层带翻边
- Contact Area plating on contacts
01: G/F

USB3.0 CONTACT PIN					
PIN NO.	1/10	2/11	3/12	4/13	Shell
NAME	VBUS	D-	D+	GND	Shield
PIN NO.	5/14	6/15	7/16	8/17	9/18
NAME	StdA-SSR-	StdA-SSR+	GND-DRAIN	StdA-SST-	StdA-SST+

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE	NAME	DATE	PART NO.	DWG NO.	JCTC® TERMINAL&CONNECTORS			
A0	新图面发行	22.03.07	LINEAR	1:1	Frey Yang	22.03.07	N3A-FA838DR9A2-A201	ENDE05				
			ANGLES	APPROVED	Daniel Dong	22.03.07						
			0.0±0.30	DESIGNER	CGY	22.03.07						
			0.00±0.25	DRAWN								
			UNIT: MM				TITLE		REV	A0	SHEET	1/1
			SIZE: A4				UDUAL STACK USB 3.1 A TYPE RECEPTACLE STD RA DIP C/H=8.38 mm					