

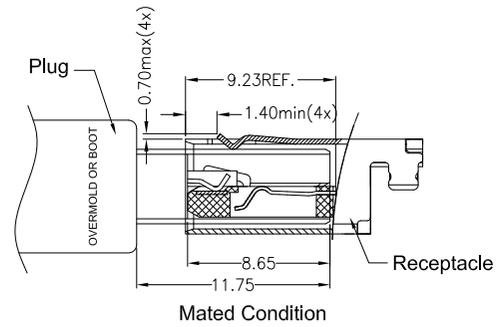
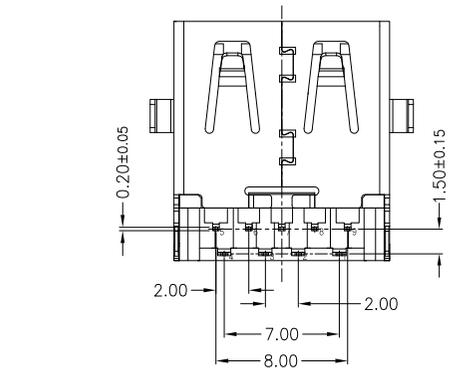

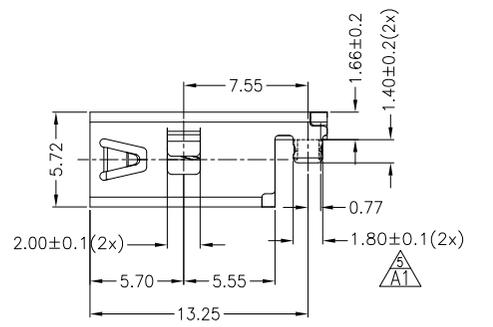
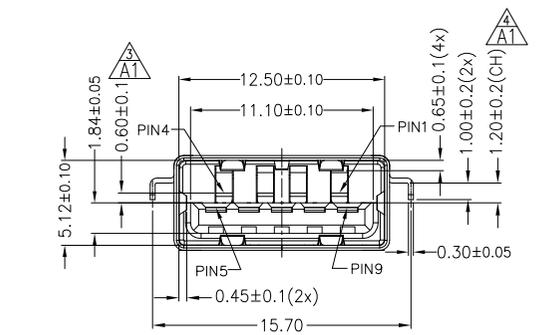
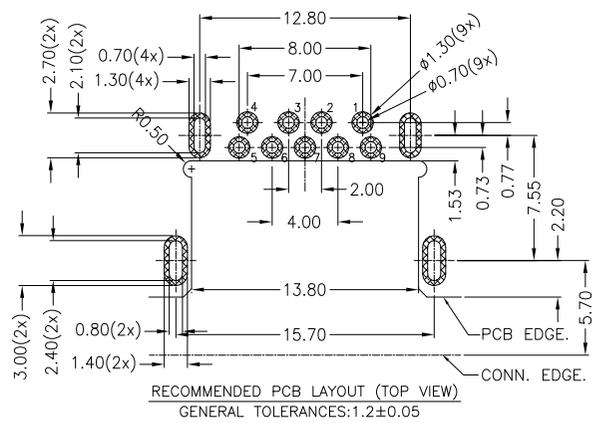


环保物料

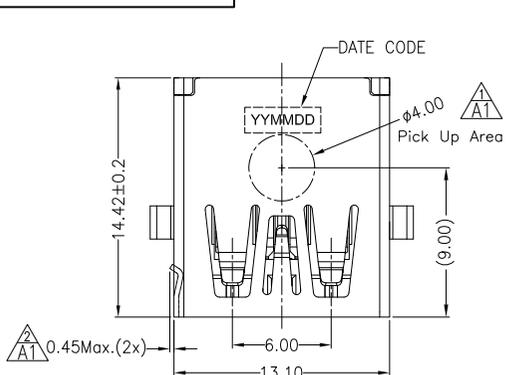

- NOTES:
- MATERIAL:
Housing: PA9T,UL94V-0,Black.
4Pin Contact: C5191.
5Pin Contact: C2680.
Shell: SUS201.
 - PLATING:
Contact: Au Plated on Contact Area,
Matt-Sn 100u" Plated on Solder Tails.
Ni 50u" min UnderPlated.
Shell: Ni 50u"min Plated All Over
 - MECHANICAL CHARACTERISTIC
Mating Force: 6~25N max.
Unmating Force: 10~25N(Initial),8~25N(After)
Durability: 5000 Cycles.
 - ELECTRICAL CHARACTERISTIC
Contact Resistance: 30m Ohm Max.
Insulation Resistance: 1000M Ohm Min
Dielectric Withstanding Voltage: 500V AC Min
 - TEMPERATURE
Operating Temperature: -40°C~+85°C
Storage Temperature: -60°C~+105°C
 - ORDER INFORMATION:

N3A-F B120 D R 9 A 3-G2 01
1 2 3 4 5 6 7 8 9 10

- N3A:USB 3.0 A TYPE
- F:FEMALE
- B120=沉板-1.20mm
- D:DIP
- R:90°
- PA9T
- COLOR A:黑色
- 3:直角
- TYPE码: G2:Gen2 分体式结构
- Contact Area plating on contacts
01: G/F

Contact Number	Signal Name
PIN1	VBUS
PIN2	D-
PIN3	D+
PIN4	GND
PIN5	StdA_SSRX-
PIN6	StdA_SSRX+
PIN7	GND_DRAIN
PIN8	StdA_SSTX-
PIN9	StdA_SSTX+
Shell	Shield

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
A0	新图面发行	21.11.30	LINEAR	ANGLES	1:1	Frey Yang	21.12.02	N3A-FB120DR9A3-G201	ENDE05				
A1	按标准更新图纸	21.12.02	0.0±0.25	X° REF±6°	APPROVED	Daniel Dong	21.12.02	TITLE USB3.1 AF R/A RVS DIP TYPE CH=-1.2mm		REV	A1	SHEET	1/1
			UNIT: MM	X° ±3°	DESIGNER	Micky Ma	21.12.02						
			SIZE: A4	0.00±0.10	DRAWN								