


环保物料


RoHS
HF

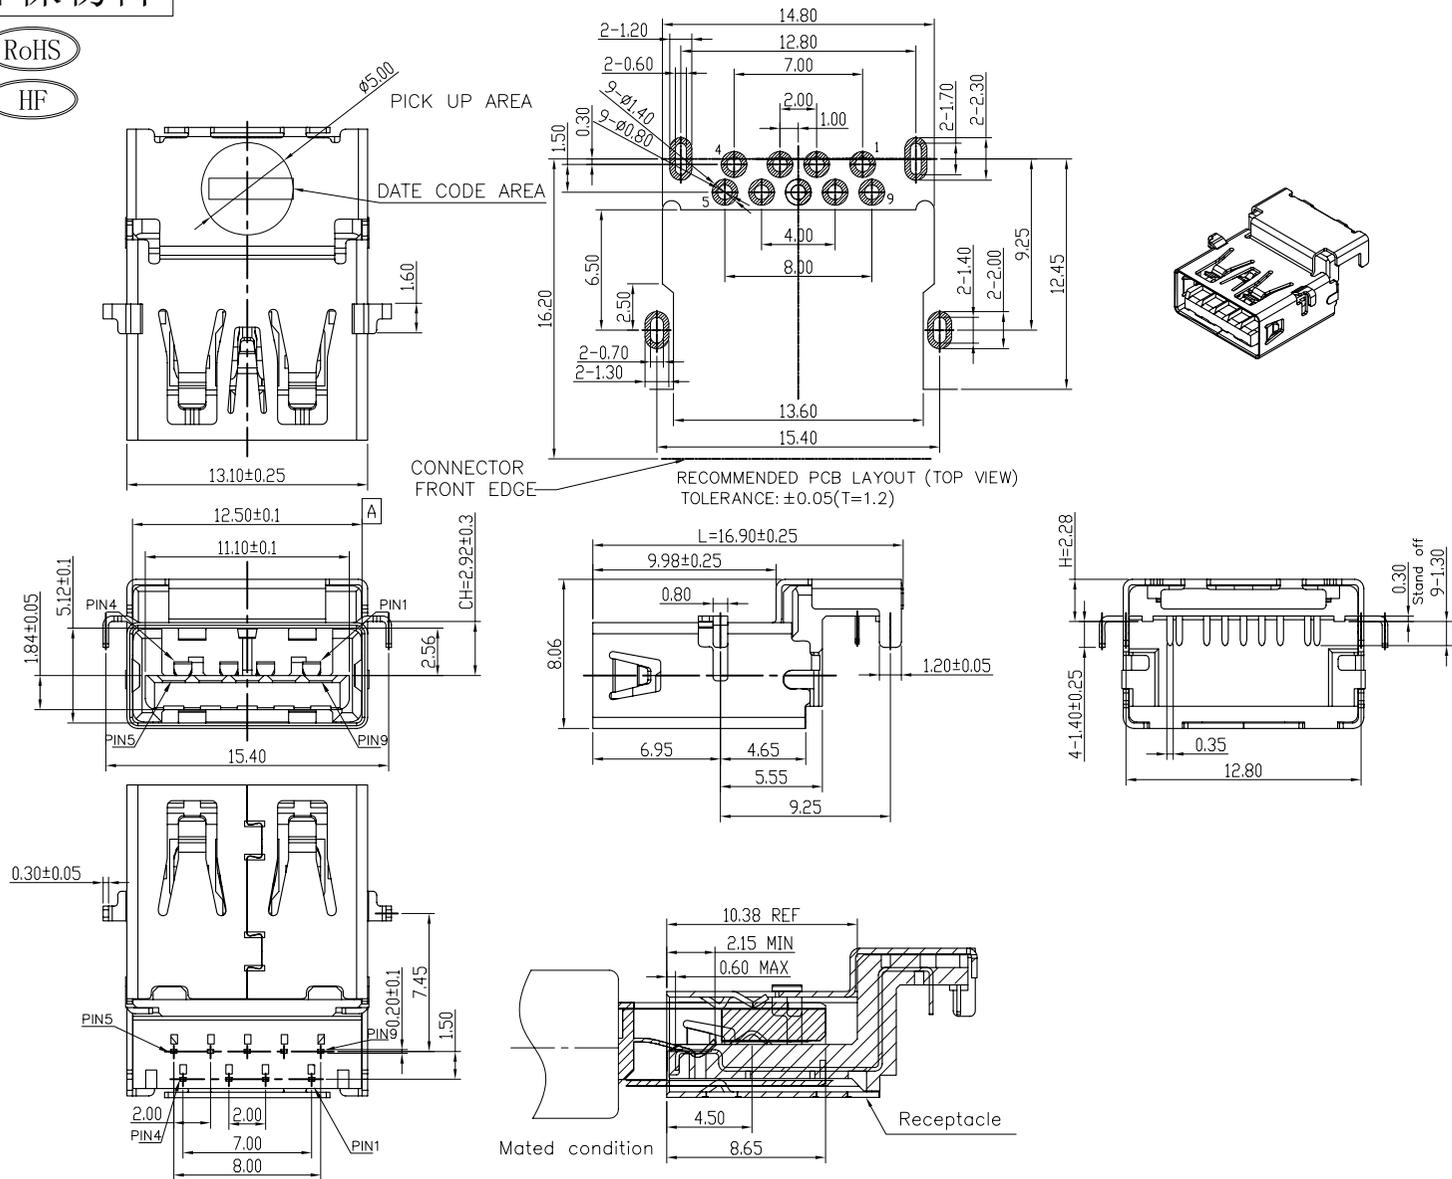

SPECIFICATIONS:

- 1.MATERIAL:**
 - 1.1 INSULATOR:HIGH TEMPERATURE PLASTIC
UL 94 V-0;BLACK (PA9T).
 - 1.2 4PIN CONTACT:C5191.
 - 1.3 SHELL:SUS 304.
- 2.ELECTRICAL CHARACTERISTICS:**
 - 2-1. CURRENT RATING:1.8A (PIN 1,4) ;
OTHER CONTACTS 0.25A.
 - 2-2. CONTACT RESISANCE 30mΩ Max.
 - 2-3. DIELECTRIC WITHSTANDING VOLTAGE:
100V AC FOR 1 MINUTE.
 - 2-4. INSULAINON RESISANCE:100MΩ MIN.
- 3.Mechanical Characteristics:**

MATING FORCE: 35 N Max
Extraction FORCE:10 N Min INITIAL;
8 N Min AFTER TESTOperating .
- 4.PLATING**
 - 4.1 TERMINAL:
60u" MIN NICKEL ALL OVER.
100u"MIN Tin ON SOLDER AREA.
(1~30)u"Au ON CONTACT AREA.
 - 4.2 SHELL:60u"MIN.NICEL ALL OVER.



N3A-F B292 D R 9 A 3-06 XX
1 2 3 4 5 6 7 8 9 10

- 1.N3A:USB 3.0 A TYPE
- 2.F:FEMALE M:MALE
- 3.B292= 中心高-2.92mm
- 4.D:DIP S:SMT
- 5.R:90° V:180°
- 6.L:LCP 9:9T 6:6T P:66
- 7.COLOR A:黑色 B:兰色
- 8.1:青蛙脚 2:鱼叉脚 3:直角
- 9.TYPE码: 00:普通规格
- 10.Contact Area plating on contacts

| | |
|-------------|-------------|
| 01: G/F | 03: Au 3u" |
| 05: Au 5u" | 10: Au 10u" |
| 15: Au 15u" | 30: Au 30u" |

| | | | | | | | | | | | | | | | |
|--------|----------|------------------|---------|----------|-----------------------|-------------|----------|-----|---------------------|--|-------------------------------|--|-------------------------|-------|--------|
| | | | | | 一般公差GENERAL TOLERANCE | | 绘图 DR. | 李兴泽 | 料号 PART NO. | | 文件编号 NUMBER | | TERMINAL&CONNECTORS | | |
| | | | | | X.X ±0.30 | X' ±2' | 校对 CHK. | 董东平 | N3A-FB292DR9A3-06XX | | ENDPT01 | | | | |
| | | | | | X.XX ±0.20 | X.X' ±1' | 审核 CHK. | 董东平 | 品名TITLE | | USB 3.0 AF RVS CH=-2.92 H2.28 | | 比例SCALE | SHEET | 版次REV. |
| A0 | 20.04.26 | 新图面发行 | 董东平 | 杨章雄 | X.XXX ±0.10 | ▲MAJOR DIM. | 核准 APPD. | 杨章雄 | L16.90 DIP | | 1/1 | | 1/1 | A0 | |
| 版次REV. | 日期 DATE | 变更内容 DESCRIPTION | 审核 CHK. | 核准 APPD. | 单位UNIT | mm | | | | | | | | | |

