
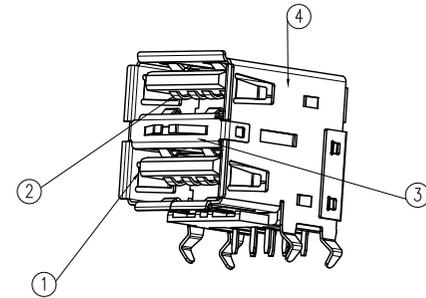
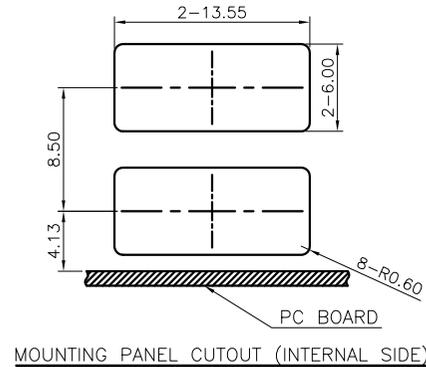
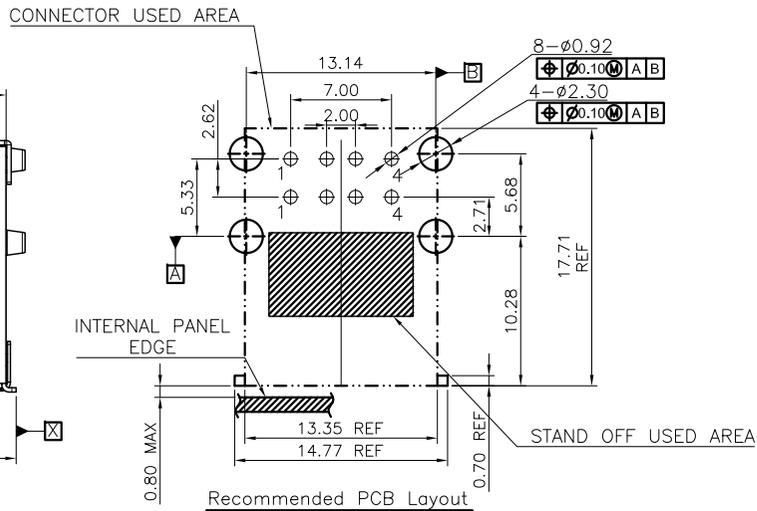





环保物料

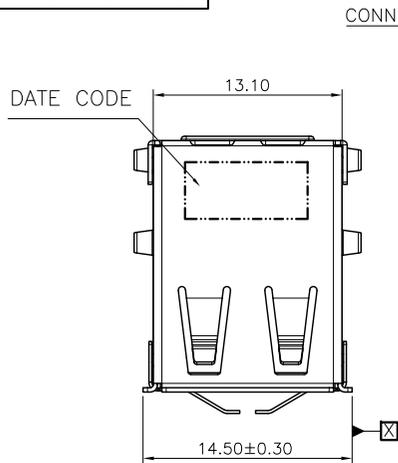

- 1.characteristics:
- 1.1 Rating Voltage : 30V AC.
 - 1.2 Rating Current:1.5 AMP
 - 1.3 Contact Resistance:30 mΩ MAX.
 - 1.4 Insulation Resistance:100 MΩ MIN.
 - 1.5 Withstanding Voltage:AC 500V.
 - 1.6 Mating force: 35N MAX
 - 1.7 Extraction force:10N Min
 - 1.8 Life test:1500Cycles MIN.
 - 1.9 Temperature Range: -55℃~+85℃.

N3A-F C000 D R 9 A 1-00 XX
1 2 3 4 5 6 7 8 9 10

- 1.N2A:USB 2.0 A TYPE
- 2.F:FEMALE
- 3.C000=沉板0.00mm
- 4.D:DIP
- 5.R:90°
- 6.9:9T
- 7.COLOR A:黑色
- 8.1:青蛙脚
- 9.TYPE码: 00:普通规格
- 10.Contact Area plating on contacts
- 01: G/F 03: Au 3u"
- 05: Au 5u" 10: Au 10u"
- 15: Au 15u" 30: Au 30u"

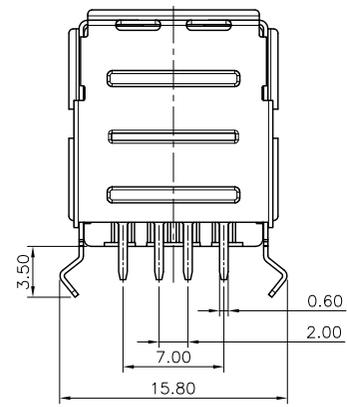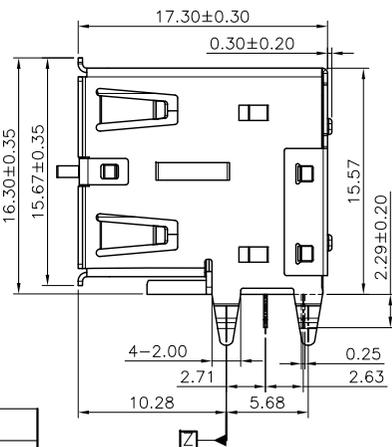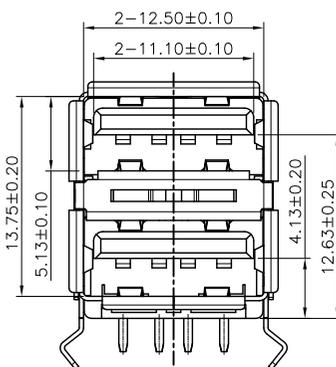

4	Shell	1	SPCC	T=0.30mm	60u"min Nickel Plated
3	Middle Shell	1	SUS201	T=0.20mm	CLEAN
2	Contact	8	C5191	T=0.25mm	Contact area: Gold Plated over 50u"Nickel min. Solder area:100u"min Matte Tin Plated over 50u" Nickel min.
1	Housing	1	PA-9T	UL 94-V0	BLUE/BLACK
No.	Name	Q'ty	Material	Remarks & Thickness	Finish

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
AO	The new version file were released	2021.11.11	LINEAR	1:1	Dong Dong Ping	2021.11.11	N3A-FC000DR9A1-00XX	ENDE05				
			ANGLES	APPROVED	Li Xing Ze	2021.11.11	TITLE					
			0.0±0.25 X° REF±6°	DESIGNER	Li Xing Ze	2021.11.11	双层USB 2.0 AF					
			0.00±0.15 X° ±3°	DRAWN	Li Xing Ze	2021.11.11			REV	AO	SHEET	1/1