

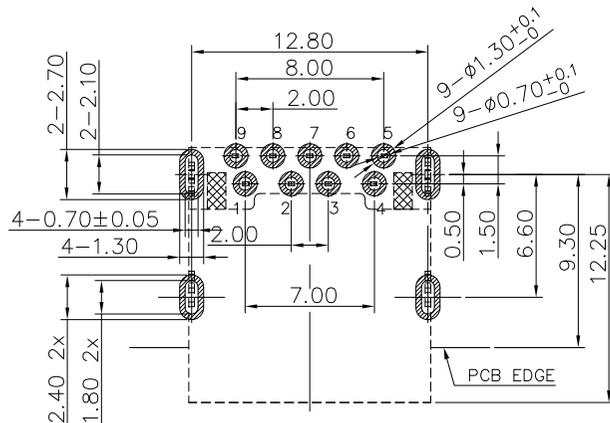
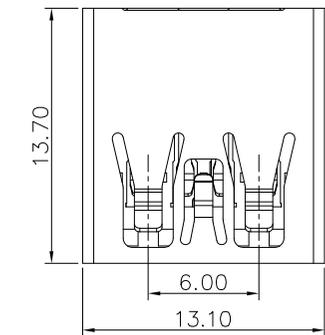


# 环保物料

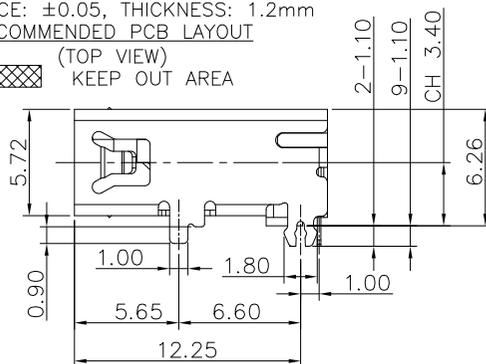

TOLERANCE:  $\pm 0.05$ , THICKNESS: 1.2mm  
 RECOMMENDED PCB LAYOUT  
 (TOP VIEW)  
 KEEP OUT AREA

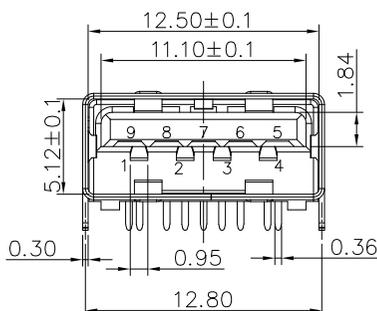

## NOTE:

### 1.MATERIAL:

- 1.1 INSULATOR:HIGH TEMPERATURE PLASTIC PA9T;
- 1.2 CONTACT:COPPER ALLOY(T=0.20mm)
- 1.3 SHELL:SUS201(T=0.30mm)

### 2.ELECTRICAL CHARACTERISTICS;



- 2.1 CONTACT RESISTANCE:30mΩ Max
- 2.2 CONTACT CURRENT RATING:1.5A
- 2.3 DIELECTRIC WITHSTANDING VOLTAGE:100 V R.M.S.
- 2.4 INSULATION RESISTANCE 100 MEGOHMS Min
- 2.5 OPERATING TEMPERATURE:-25°C ~ 75°C

### 3 MECHANICAL CHARACTERISTICS:

- 3.1 MATING FORCE:35 N Max
- 3.2 UNMATED FORCE:10 N Min

### 4.PLATING:

- 4.1 TERMINAL CONTACT:(SEE TAB) GOLD PLATING ALL OVER 50u"MIN NICKEL AND 80u"MIN Tin ALL OVER 50u" MIN NICKEL ON SOLDER AREA
- 4.2 SHELL:50u"MIN.NICEL ALL OVER

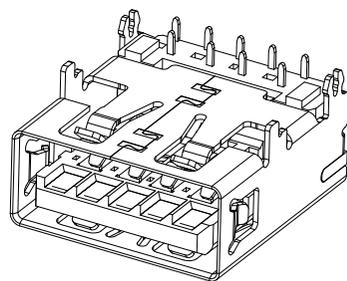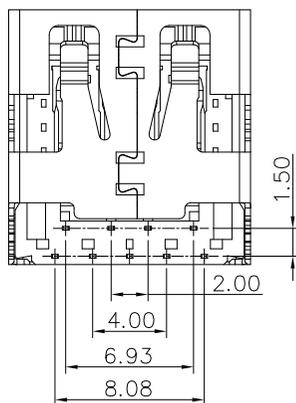





N3A-F C000 S R 9 A 2-00 XX  
 1 2 3 4 5 6 7 8 9 10

- 1.N3A:USB 3.0 A TYPE
- 2.F:FEMALE
- 3.C000=沉板0.00mm
- 4.S:SMT
- 5.R:90°
- 6.9:9T
- 7.COLOR A:黑色
- 8.2:鱼叉脚
- 9.TYPE码: 00:普通规格
- 10.Contact Area plating on contacts  
 01: G/F                      03: Au 3u"  
 05: Au 5u"                  10: Au 10u"  
 15: Au 15u"                 30: Au 30u"


Pin #	SIGNAL NAME	DESCRIPTION	MATING SEQUENCE
1	VBUS	POWER	SECOND
2	D-	USB 2.0 DIFFERENTIAL PAIR	THIRD
3	D+		
4	GND	GROUND FOR POWER RETURN	SECOND
5	StdA_SSRX-	SUPERSPEED RECEIVER DIFFERENTIAL PAIR	LAST
6	StdA_SSRX+		
7	GND_DRAIN	GROUND FOR SIGNAL RETURN	
8	StdA_SSTX-	SUPERSPEED TRANSMITTER DIFFERENTIAL PAIR	
9	StdA_SSTX+		
Shell	Shield	CONNECTOR METAL SHELL	FRIST

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE	NAME	DATE	PART NO.	DWG NO.
A0	新图面发行	22.04.15	LINEAR	1:1	Frey Yang	22.04.15	N3A-FC000SR9A2-00XX	ENDE05
			ANGLES	APPROVED	Daniel Dong	22.04.15	TITLE	
			0.0±0.38 X° REF±6°	DESIGNER	CGY	22.04.15	USB 3.0 AF 90° DIP 前直脚0.9 后鱼叉脚 1.8 H=6.26 CH=3.4 L=13.7 锡脚长1.1	
			0.00±0.25 X° ±3°	DRAWN				
			UNIT: MM					REV
			SIZE: A4					A0
			0.00±0.10 X° X'±2°					SHEET
								1/1

# 环保物料

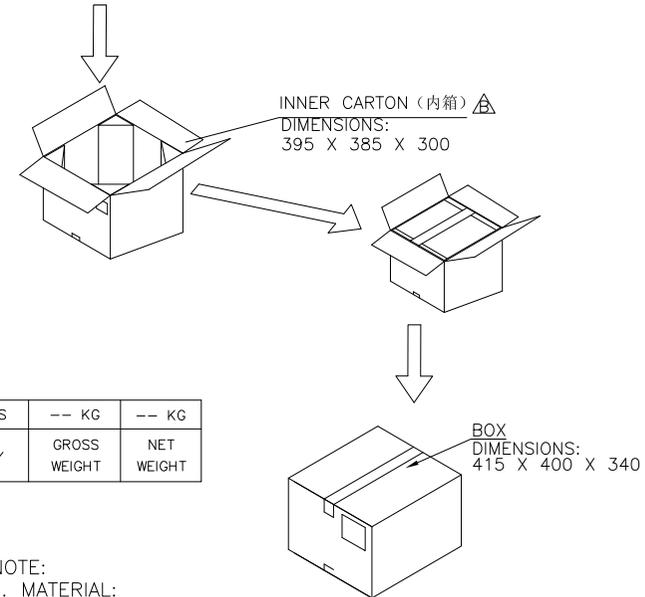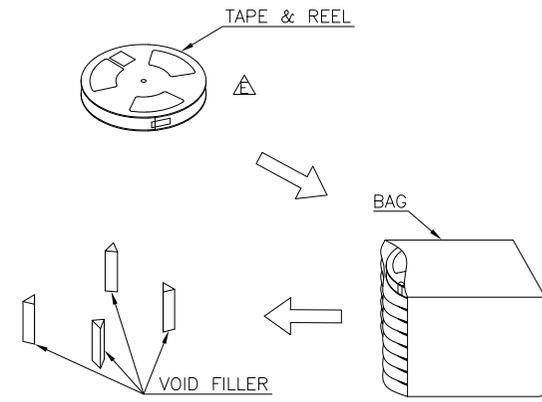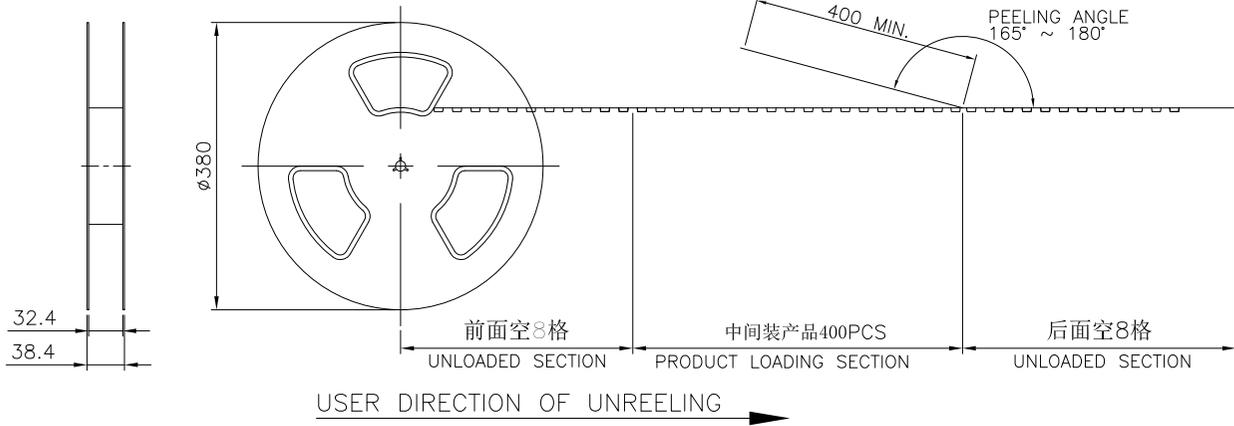


400	8	3200 PCS	-- KG	-- KG
PCS/ REEL	REELS/ CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT

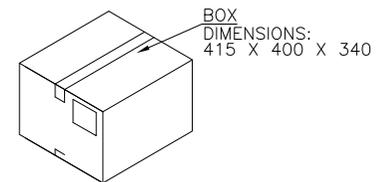

- NOTE:
- MATERIAL:
    - BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL.
    - TAPE: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 120°C, BLACK COLOR.
    - REEL: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 70°C, BLUE COLOR.
    - BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C.
  - PEELING STRENGTH: 0.1 ~ 1.3 N (10 ~ 130 GRAMS)
  - PEELING SPEED: 300 mm/min.
  - EACH BAG SHALL BE INCLUDED DESICCANT.

## 标签沾贴图示

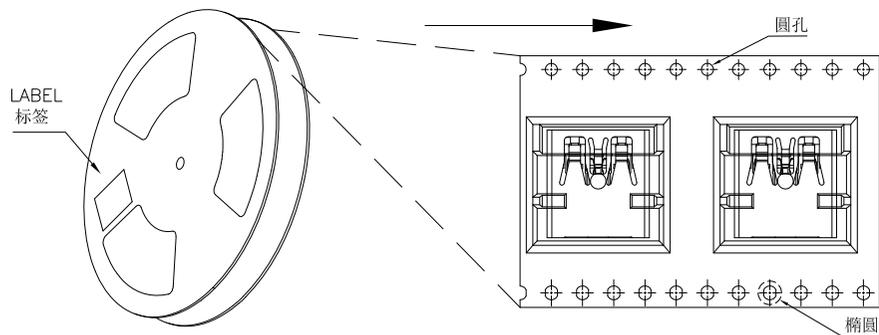

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.	 <b>JCTC</b> ® TERMINAL&CONNECTORS
A0	新图面发行	22.04.15		LINEAR	ANGLES	APPROVED	Frey Yang	22.04.15	N3A-FC000SR9A2-00XX	ENDE05	
			0.00±0.25	X° ±3°	DESIGNER	Daniel Dong	22.04.15	TITLE			
			0.00±0.10	X° X' ±2°	DRAWN	CGY	22.04.15	USB 3.0 AF 90° DIP 前直脚0.9 后鱼叉脚 1.8 H=6.26 CH=3.4 L=13.7 锡脚长1.1			
1	2	3	4	5	6	7	8	REV	A0	SHEET	1/1