

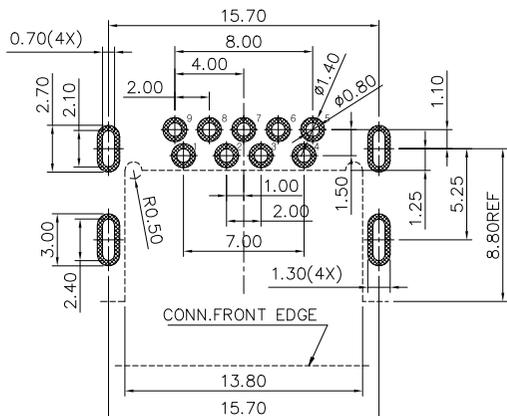
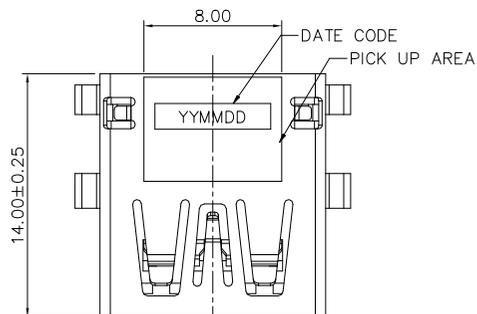

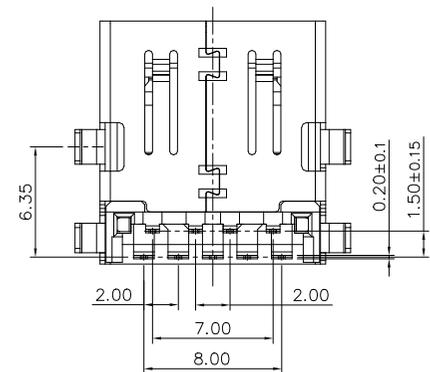


环保物料

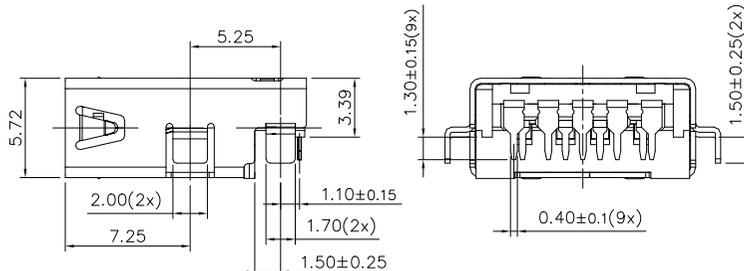

RECOMMENDED PCB LAYOUT (TOP VIEW)
GENERAL TOLERANCES: ±0.05 (t=1.0)

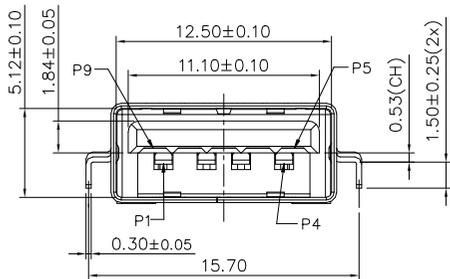

NOTES:

- MATERIAL AND PLATING:**
Housing: LCP+30%G.F,UL94V-0,Black
Contact(4Pin): Copper Alloy,Au And Sn Plated.
Contact(5Pin): Copper Alloy,Au And Sn Plated.
Shell: Stainless Steel,Ni Plated.
- MECHANICAL CHARACTERISTIC**
Mating Force: 10N(1.02Kg) Max.
Unmating Force: 2~10N(0.2~1.02Kg)
Durability: 5,000 Cycles.
- ELECTRICAL CHARACTERISTIC**
Current Rating: 1.8A(Pin1,4),
0.25A For Other Contacts.
Voltage Rating: 30V AC Max.
Contact Resistance: 30m Ohm Max.
Insulation Resistance: 100M Ohm Min.
Dielectric Withstanding Voltage: 100V AC.
- TEMPERATURE**
Operating Temperature: -40°C~+85°C
Storage Temperature: -60°C~+105°C
- DATECODE INFORMATION:**
YYMMDD (Y: YEAR M: MONTH D: DATE)
- ORDER INFORMATION:**
N3A-F C053 D R L A 3-01 XX
1 2 3 4 5 6 7 8 9 10
1.N3A:USB 3.0 A TYPE N3B:USB 3.0 B TYPE
N2A:USB 2.0 A TYPE N2B:USB 2.0 B TYPE
2.F:FEMALE M:MALE
3.C053=沉板0.53mm
4.D:DIP S:SMT
5.R:90° V:180°
6.L:LCP
7.COLOR A:黑色 W:白色 B:蓝色
8.1:青蛙脚 2:鱼叉脚 3:直角
9.TYPE: 00:普通规格 D0:短体规格 B2:L=14.05mm规格
10.Contact Area plating on contacts
01: G/F 03: Au 3u"
05: Au 5u" 10: Au 10u"
15: Au 15u" 30: Au 30u"

Contact Number	Signal Name
PIN1	VBUS
PIN2	D-
PIN3	D+
PIN4	GND
PIN5	StdA_SSRX-
PIN6	StdA_SSRX+
PIN7	GND_DRAIN
PIN8	StdA_SSTX-
PIN9	StdA_SSTX+
Shell	Shield

一般公差GENERAL TOLERANCE

X.X ±0.30	X* ±2*
X.XX ±0.20	X.X* ±1*
X.XXX ±0.10	▲MAJOR DIM.

单位UNIT
mm

绘图

DR. 董东平
校对 CHK.
审核 CHK.
核准 APPD.

料号 PART NO.

N3A-FC053DRLA3-0101

品名TITLE

USB3.0 AF R/A DIP Type
CH=0.53mm

文件编号 NUMBER

ENDPT01

JGTC[®]
TERMINAL&CONNECTORS

比例SCALE
1/1

SHEET
1/1


版次REV.
A0

版次REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.
A0	21.06.9	新图面发行	董东平	杨章雄


PACKAGING INSTRUCTION I:

1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON
ALL CARTONS CLOSURES MUST BE DONE WITH TAPE.
2. FILL PACKAGING REEL WITH THE QUANTITIES AS INDICATED
IN THE CHART.


PRODUCT P/N	PARTS PER SHIPPING CARTON	PARTS PER REEL (S.P.Q.)	TOTAL REELS PER PRIMARY CARTON
SSB-A09F-XXT-UNXX	450 (PCS)	450 (PCS)	10

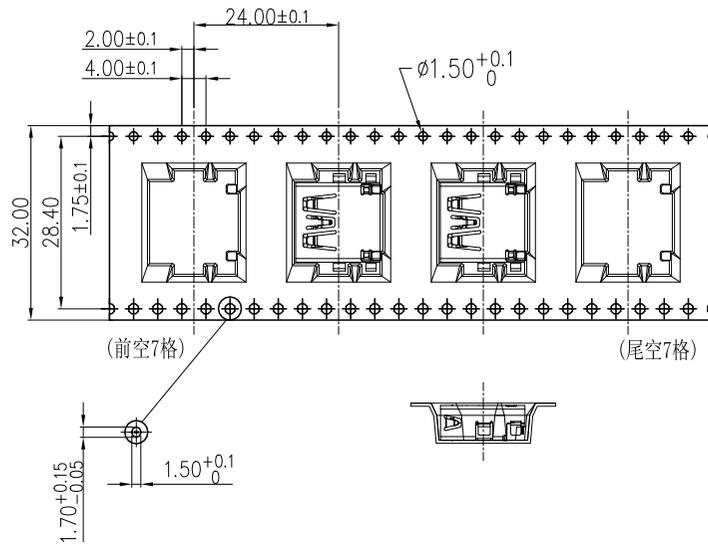


1. QUANTITY: 450 PCS
2. COVER TAPE PEELING FORCE:



3. PART DIMENSIONS MEET EIA-481-D REQUIREMENT

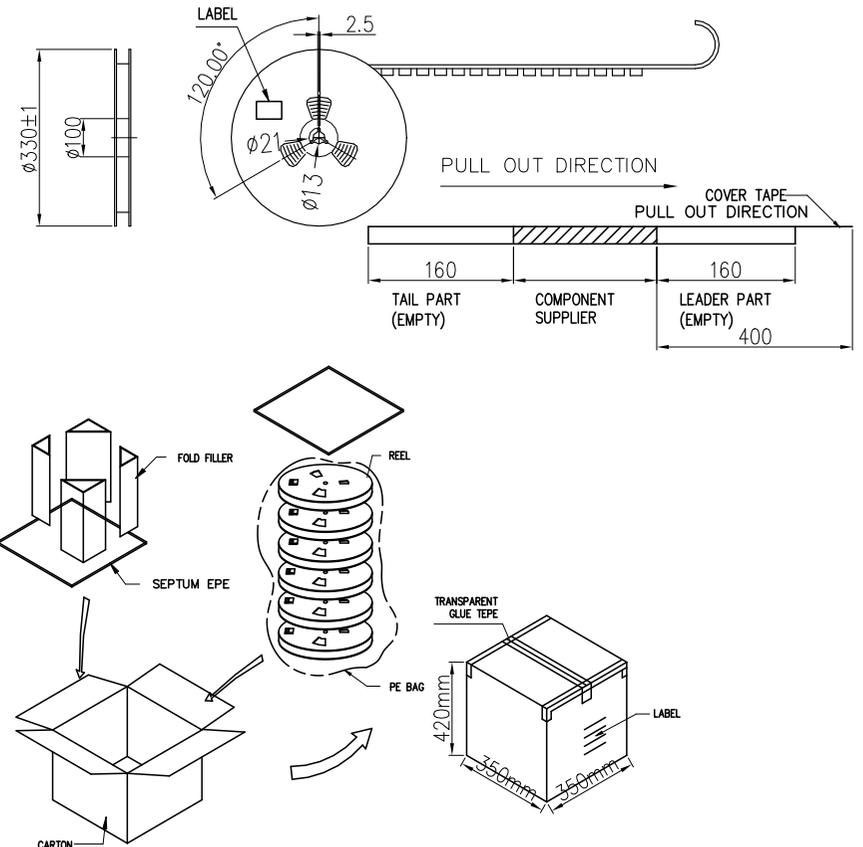

				一般公差 GENERAL TOLERANCE		绘图 DR.	董东平	料号 PART NO.	文件编号 NUMBER	 TERMINAL&CONNECTORS		
				X.X ±0.30	X* ±2°	校对 CHK.		N3A-FC053DRLA3-0101	ENDPT01			
				X.XX ±0.20	X.X* ±1°	审核 CHK.		品名 TITLE				
				X.XXX ±0.10	▲ MAJOR DIM.	核准 APPD.		USB3.0 AF R/A DIP TYPE				
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位 UNIT			CH=0.53 (包装规范)	比例 SCALE	SHEET	版次 REV.	
A0	21.06.09	新图面发行	董东平	杨章雄	mm				1/1	1/1	A0	