

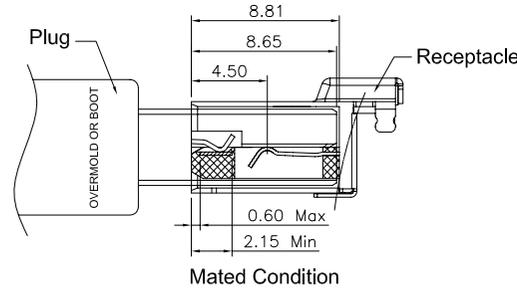
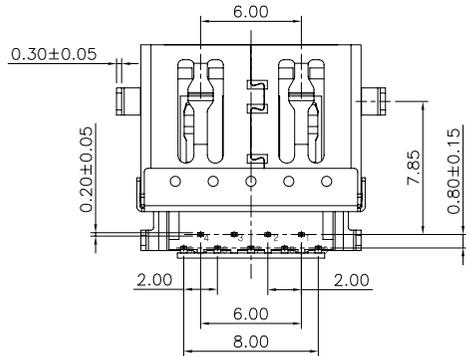
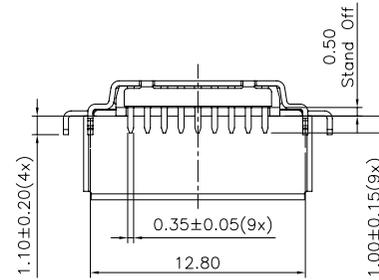
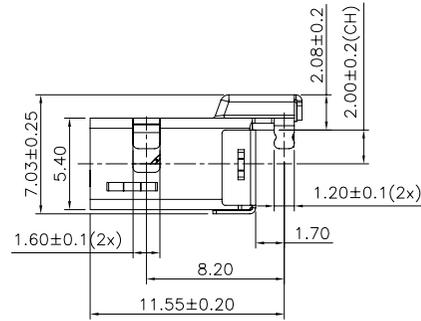
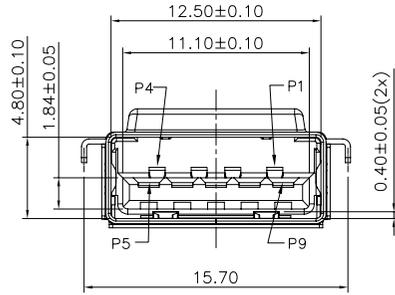
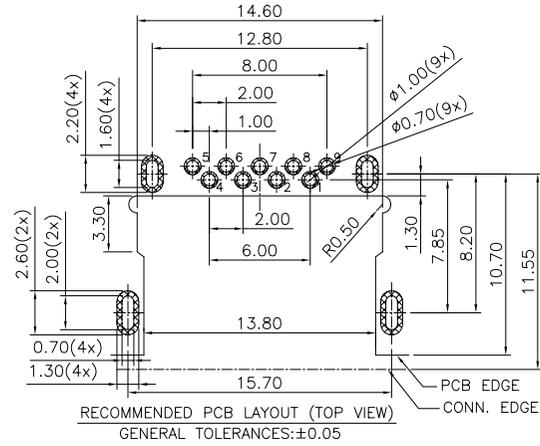


环保物料

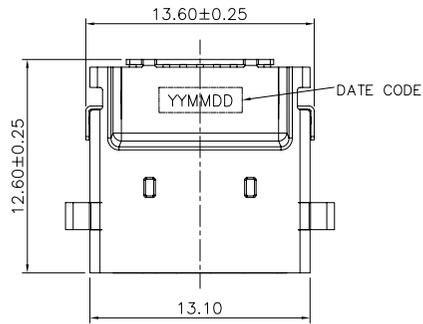

NOTES:

- MATERIAL:**
Housing: High Temperature Plastic, UL94V-0, Black.
Contact: Copper Alloy.
Shell: Stainless Steel.
- PLATING:**
Contact: Au Plated on Contact Area,
Matt-Sn 100u" Plated on Solder Tails.
Ni 50u" Min UnderPlated.
Shell: Ni 50u" Min Plated All Over
- MECHANICAL CHARACTERISTIC**
Mating Force: 25N(2.55Kg) max.
Unmating Force: 9.8N(1Kg) min.
8N(0.816Kg) min.
Durability: 5000 Cycles.
- ELECTRICAL CHARACTERISTIC**
Contact Resistance: 30m Ohm Max.
Insulation Resistance: 1000M Ohm Min
Dielectric Withstanding Voltage: 500V AC Min
- TEMPERATURE**
Operating Temperature: -40°C~+85°C
Storage Temperature: -60°C~+105°C
- ORDER INFORMATION:**

N3A-F C200 D R L A 3-C1 XX
1 2 3 4 5 6 7 8 9 10

- 1.N3A:USB 3.0 A TYPE N3B:USB 3.0 B TYPE
N2A:USB 2.0 A TYPE N2B:USB 2.0 B TYPE
2.F:FEMALE M:MALE
3.C200=沉板2.00mm
4.D:DIP S:SMT
5.R:90° V:180°
6.L:LCP 9:9T 6:6T P:66
7.COLOR A:黑色 W:白色 B:蓝色
8.1:青绿脚 2:鱼叉脚 3:直角
9.TYPE码: 00:普通规格 C1:接口4.80mm A0:不带翻边 B0:对插口斜面
10.Contact Area plating on contacts
01: G/F 03: Au 3u"
05: Au 5u" 10: Au 10u"
15: Au 15u" 30: Au 30u"

Contact Number	Signal Name
PIN1	VBUS
PIN2	D-
PIN3	D+
PIN4	GND
PIN5	StdA_SSRX-
PIN6	StdA_SSRX+
PIN7	GND_DRAIN
PIN8	StdA_SSTX-
PIN9	StdA_SSTX+
Shell	Shield

A0		21.03.09	新图面发行	李兴泽	
版次REV	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	

一般公差 GENERAL TOLERANCE		绘图 DR.	李兴泽
X.X ±0.30	X' ±2'	校对 CHK.	
X.XX ±0.20	X.X' ±1'	审核 CHK.	
X.XXX ±0.10	▲ MAJOR DIM.	核准 APPD.	
单位 UNIT	mm		

料号 PART NO.	N3A-FC200DRLA3-C1XX
文件编号 NUMBER	ENDPT01
品名 TITLE	SLIDE SWITCH


 TERMINAL&CONNECTORS			
比例 SCALE	1/1	版次 REV.	A0

环保物料

PACKAGING INSTRUCTION:


1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON
ALL CARTONS CLOSURES MUST BE DONE WITH TAPE.
2. FILL PACKAGING REEL WITH THE QUANTITIES AS INDICATED
IN THE CHART.

PRODUCT P/N	PARTS PER SHIPPING CARTON	PARTS PER REEL (S.P.Q.)	TOTAL REELS PER PRIMARY CARTON
N3A-FC200DRLA3-C1XX	3000 (PCS)	300 (PCS)	10


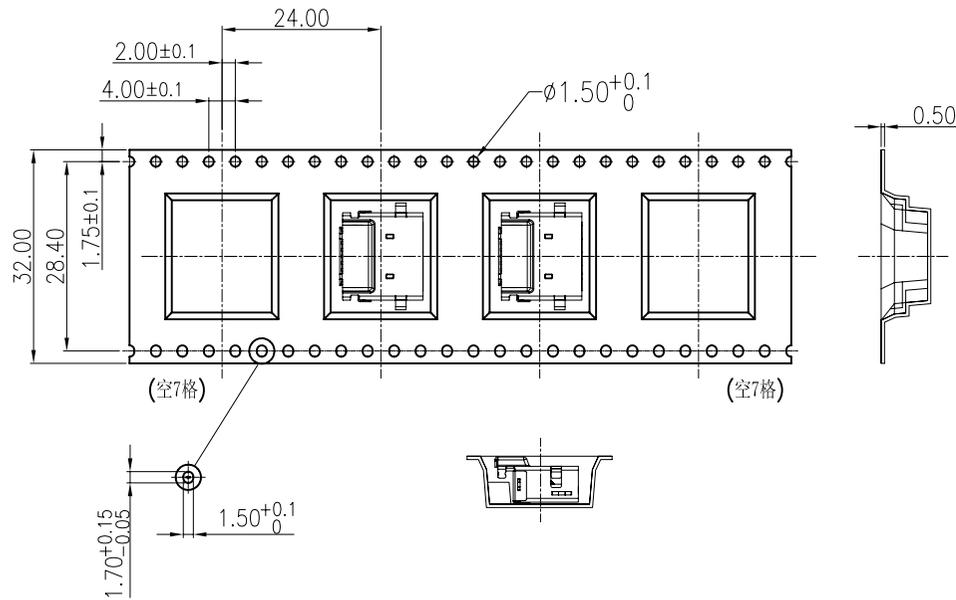


1. QUANTITY: 300 PCS

2. COVER TAPE PEELING FORCE:



3. PART DIMENSIONS MEET EIA-481-D REQUIREMENT

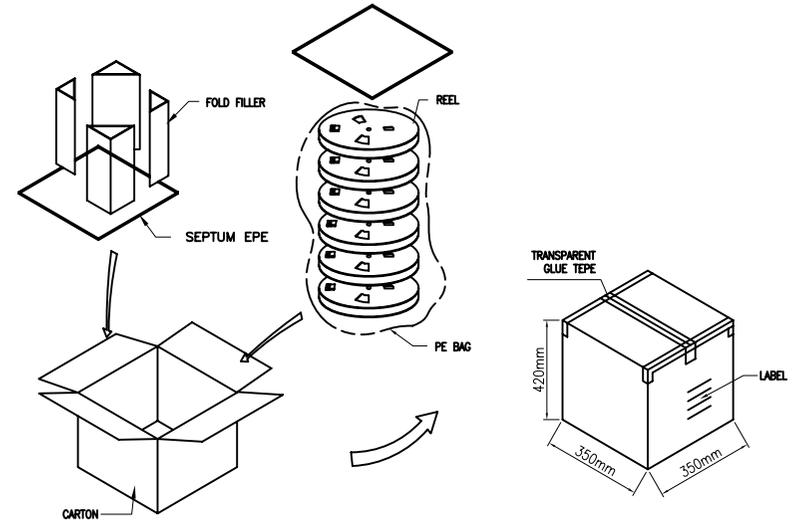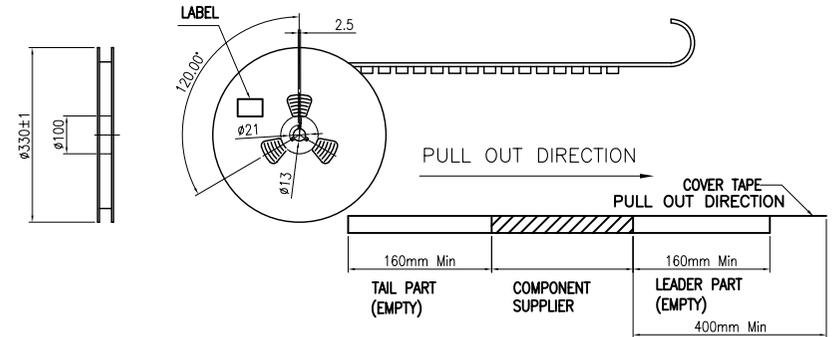

版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.
A0	21.03.09	新图面发行	李兴泽	

一般公差 GENERAL TOLERANCE	
X.X ±0.30	X* ±2*
X.XX ±0.20	X.X* ±1*
X.XXX ±0.10	▲ MAJOR DIM.

绘图 DR.	李兴泽
校对 CHK.	
审核 CHK.	
核准 APPD.	

料号 PART NO.	N3A-FC200DRLA3-C1XX
品名 TITLE	USB3.1 GEN2 AF R/A DIP RVS TYPE CH=-2.0mm 包装规范

文件编号 NUMBER	ENDPT01
-------------	---------

JGTC® TERMINAL&CONNECTORS		
比例 SCALE	SHEET	版次 REV.
1/1	1/1	A0