

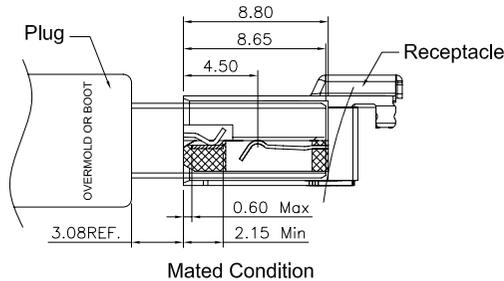
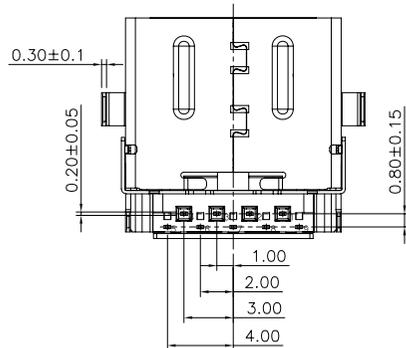

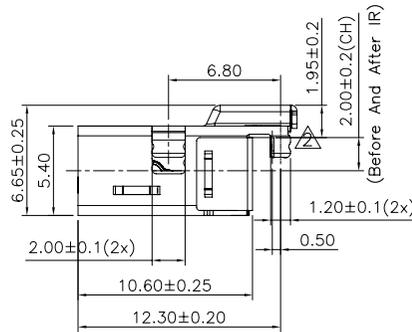
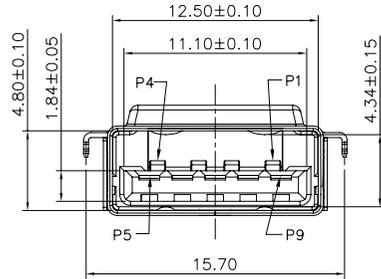
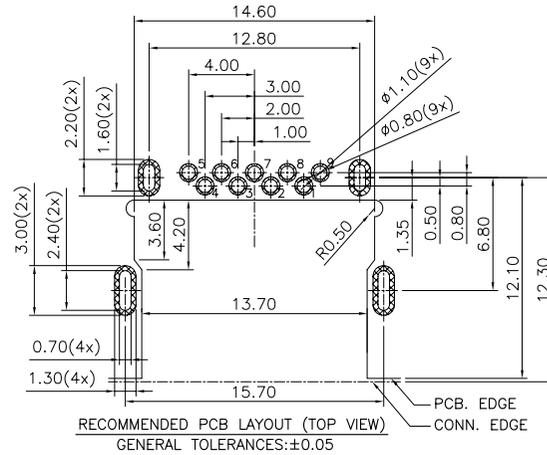


环保物料

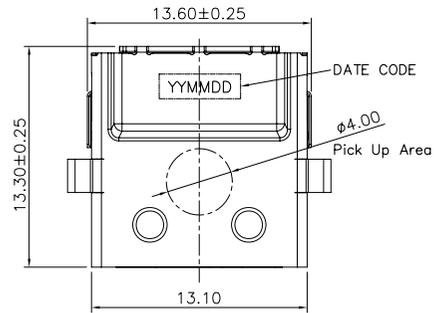

NOTES:

- MATERIAL:**
Housing: PA9T,UL94V-0,Black.
Contact: Copper Alloy.
Shell: Stainless Steel.
Cover: Stainless Steel.
- PLATING:**
Contact: Au Plated on Contact Area,
Matt-Sn 100u" Plated on Solder Tails.
Ni 50u" Min UnderPlated.
Shell: Matte Ni 50u"Min Plated All Over
Cover: No Plated.
- MECHANICAL CHARACTERISTIC**
Mating Force: 6~20N.
Unmating Force: Initial:8~20N
After:6~20N(New Plug)
Durability: 5000 Cycles.
- ELECTRICAL CHARACTERISTIC**
Contact Resistance: 30m Ohm Max.
Insulation Resistance: 100M Ohm Min
Dielectric Withstanding Voltage: 500V AC Min
- TEMPERATURE**
Operating Temperature: -40°C~+85°C
Storage Temperature: -60°C~+105°C
- ORDER INFORMATION:**

N3A-F C200 D R L A 3-DO XX
1 2 3 4 5 6 7 8 9 10

- N3A:USB 3.0 A TYPE N3B:USB 3.0 B TYPE
- N2A:USB 2.0 A TYPE N2B:USB 2.0 B TYPE
- F:FEMALE M:MALE
- C200=沉板2.00mm
- D:DIP S:SMT
- R:90° V:180°
- L:LC P:99T 6:6T P:66
- COLOR A:黑色 W:白色 B:蓝色
- 1:有引脚 2:鱼叉脚 3:直角
- TYPE码: 00:普通规格 C1:接口4.80mm A0:不带翻边 B0:对插口斜面 D0:短体规格
- Contact Area plating on contacts
01: G/F 03: Au 3u"
05: Au 5u" 10: Au 10u"
15: Au 15u" 30: Au 30u"

Contact Number	Signal Name
PIN1	VBUS
PIN2	D-
PIN3	D+
PIN4	GND
PIN5	StdA_SSRX-
PIN6	StdA_SSRX+
PIN7	GND_DRAIN
PIN8	StdA_SSTX-
PIN9	StdA_SSTX+
Shell	Shield


A2		21.06.24	依实物修订图面	董东平	杨章雄	一般公差 GENERAL TOLERANCE		绘图 DR.	料号 PART NO.		文件编号 NUMBER		 TERMINAL&CONNECTORS		
A1		21.06.16	更新图纸与实物相符	董东平	杨章雄	X.X ±0.30	X' ±2'	校对 CHK.	N3A-FC200DRLA3-DOXX		ENDPT01				
A0		21.04.13	新图面发行	董东平	杨章雄	X.XX ±0.20	X.X' ±1'	审核 CHK.	品名 TITLE		USB3.1 GEN2 AF R/A DIP RVS		比例 SCALE	SHEET	版次 REV.
版次 REV.	日期 DATE	变更内容 DESCRIPTION		审核 CHK.	核准 APPD.	X.XXX ±0.10	▲ MAJOR DIM.	核准 APPD.	TYPE CH=-2.0mm		1/1	1/1	A2		

环保物料


PACKAGING INSTRUCTION:

1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON
ALL CARTONS CLOSURES MUST BE DONE WITH TAPE.
2. FILL PACKAGING REEL WITH THE QUANTITIES AS INDICATED
IN THE CHART.


PRODUCT P/N	PARTS PER SHIPPING CARTON	PARTS PER REEL (S.P.Q.)	TOTAL REELS PER PRIMARY CARTON
N3A-FC200DRLA3-DOXX	3500 (PCS)	350 (PCS)	10

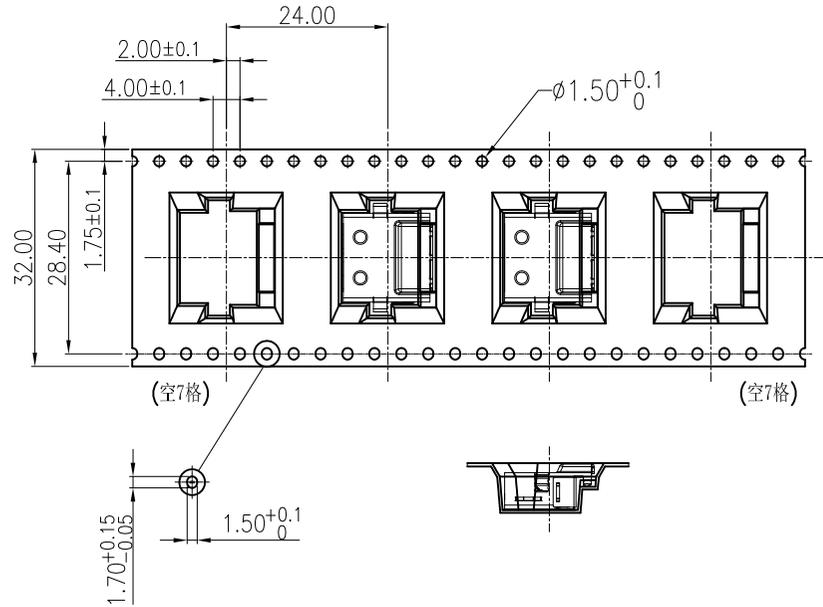

1. QUANTITY: 350 PCS
2. COVER TAPE PEELING FORCE:



3. PART DIMENSIONS MEET EIA-481-D REQUIREMENT

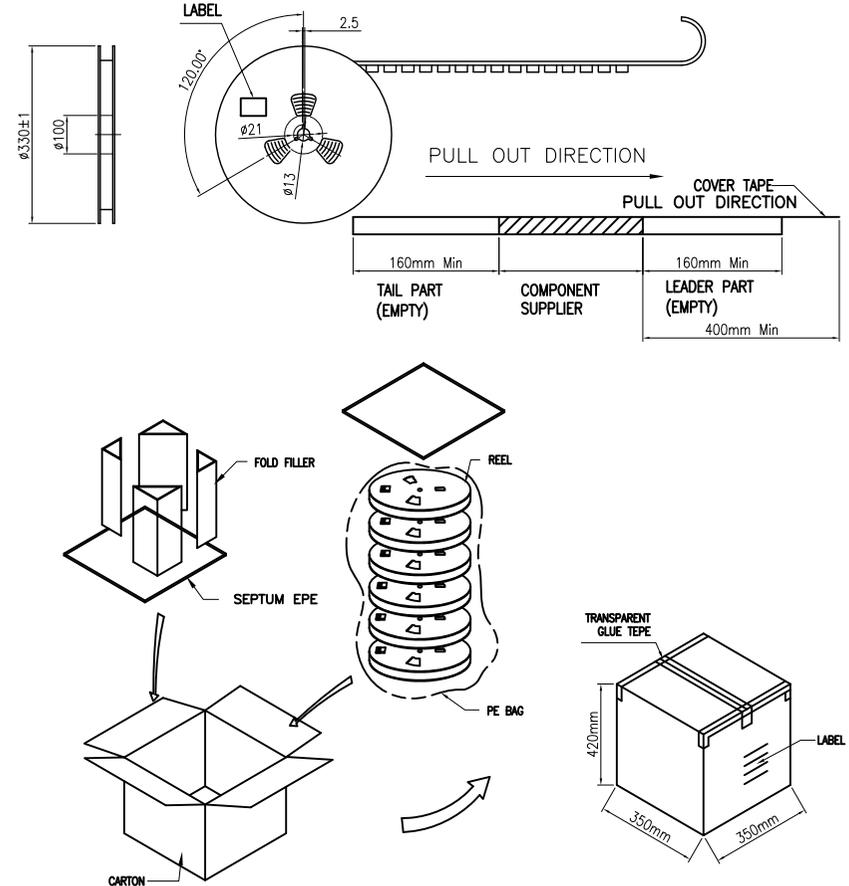

一般公差 GENERAL TOLERANCE					绘图 DR.	料号 PART NO.	文件编号 NUMBER	JCTC® TERMINAL&CONNECTORS			
X.X	±0.30	X*	±2*	校对 CHK.	N3A-FC200DRLA3-DOXX	ENDPT01					
X.XX	±0.20	X.X*	±1*	审核 CHK.	品名 TITLE						
X.XXX	±0.10	▲ MAJOR DIM.		核准 APPD.	USB3.1 GEN2 AF R/A DIP RVS TYPE CH=-2.0mm 包装规范						
单位 UNIT	mm					比例 SCALE	1/1	SHEET	1/1	版次 REV.	A0