
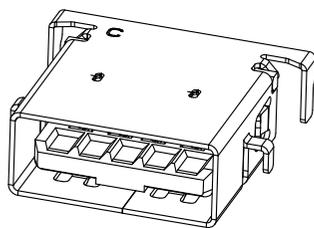
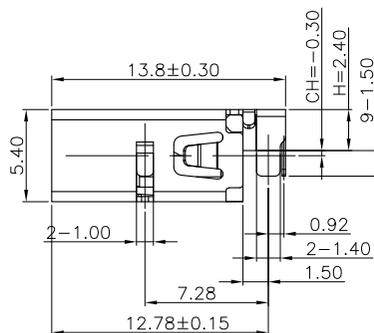
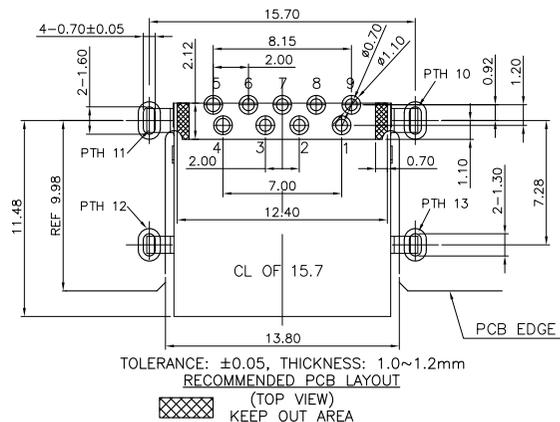
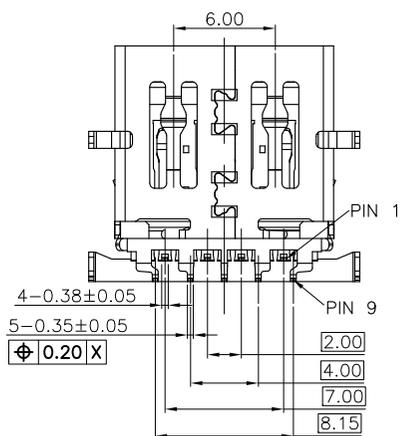
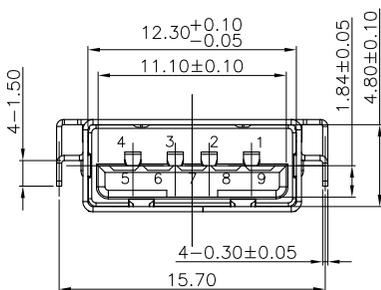


环保物料

HF

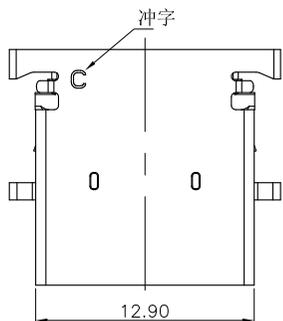

3D VIEW

NOTE:

- 1.MATERIAL:
 - 1.1 INSULATOR: LCP UL 94 V-0;
 - 1.2 CONTACT: C5191(T=0.2mm)
 - 1.3 SHELL:SUS 201(T=0.30mm)
- 2.ELECTRICAL CHARACTERISTICS;
 - 2.1 CONTACTRESISTANCE:30m MAX.
 - 2.2 CONTACT CURRENT RATING:1.5A
 - 2.3 DIELECTRIC WITHSTANDING VOLTAGE:100 V R.M.S.
 - 2.4 INSULATION RESISTANCE 100 MEGOHMS M
 - 2.5 OPERATING TEMPERATURE:-55°C~85°C
 - 2.6 RATE VOLTAGE: 30V DC
- 3 MECHANICAL CHARACTERISTICS:
 - 3.1 MATING FORCE: 35 N Max.
 - 3.2 UNMATED FORCE: 10 N MIN. 8 N Min AFTER TEST
 - 3.3 DURABILITY:5,000 CYCLES
- 4.PLATING
 - 4.1 TERMINAL CONTACT:GOLD PLATING ALL OVER
50u" MIN NICKEL AND 80u"MIN Matte Tin
NICKEL IN SOLDER AREA (SEE TAB)
 - 4.2 SHELL:50u"MIN. NICKEL ALL OVER

N3A-F E030 D R L B 3-A0 01

1 2 3 4 5 6 7 8 9 10





- 1.N3A:U3 A TYPE
- 2.F:FEMALE
- 3.E030=反向中心高-0.30mm
- 4.D:DIP
- 5.R:90°
- 6.L:LCP
- 7.COLOR B:兰色
- 8.3:直角
- 9.TYPE码: A0:不带翻边
- 10.Contact Area plating on contacts
01: G/F

Pin #	SIGNAL NAME	DESCRIPTION	MATING SEQUENCE
1	VBUS	POWER	SECOND
2	D-	USB 2.0 DIFFERENTIAL PAIR	THIRD
3	D+		
4	GND	GROUND FOR POWER RETURN	SECOND
5	StdA_SSX-	SUPERSPEED RECEIVER DIFFERENTIAL PAIR	LAST
6	StdA_SSX+		
7	GND_DRAIN	GROUND FOR SIGNAL RETURN	
8	StdA_SSTX-	SUPERSPEED TRANSMITTER DIFFERENTIAL PAIR	
9	StdA_SSTX+		
Shell	Shield	CONNECTOR METAL SHELL	FRIST

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
A0	新图面发行	22.03.11	LINEAR	ANGLES	1:1	Frey Yang	22.03.11	N3A-FE030DRLB3-A001	ENDE05				
			0.0±0.30	X° REF±6°	APPROVED	Daniel Dong	22.03.11	TITLE					
			0.00±0.25	X° ±3°	DESIGNER	WZS	22.03.11	USB3.0 AF RVS CH=-0.30 H2.4					
			0.000±0.10	X° X' ±2°	DRAWN			L=13.8 DIP		REV	A0	SHEET	1/1

环保物料

HF

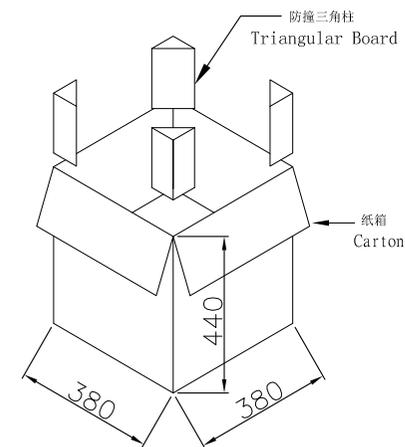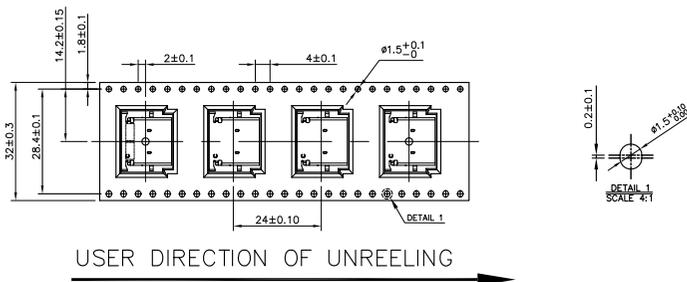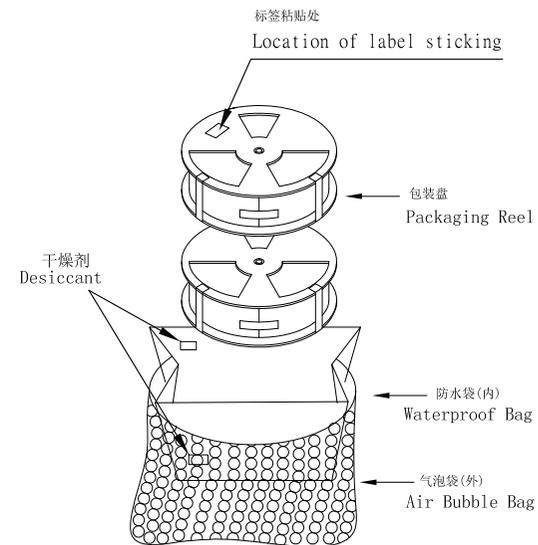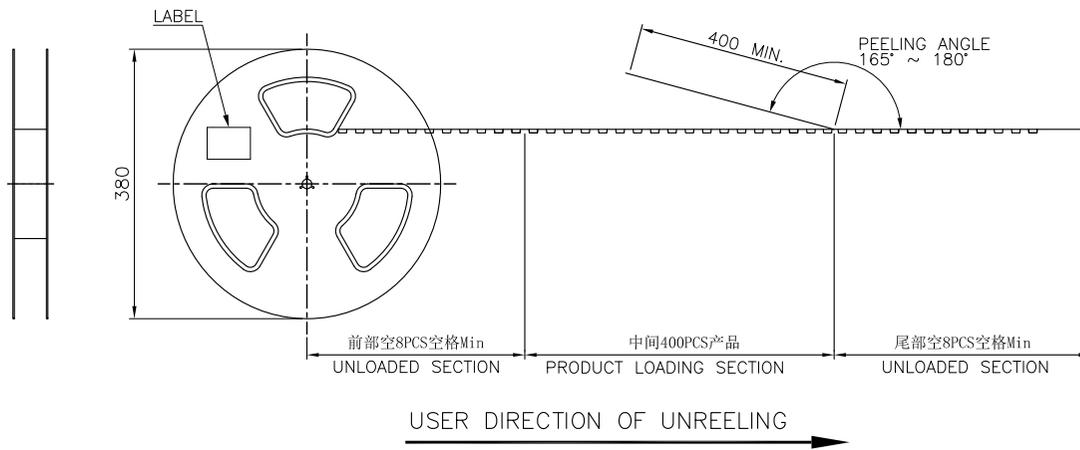

NOTE:

- MATERIAL:
 BOX: FIBRE BOARD, CORRUGATED, DOUBLE WALL (K=K).
 TAPE: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 120°C, Transparent color(透明色).
 REEL: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 70°C, BLUE COLOR.
 BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C.
- PEELING STRENGTH: 0.2~1.0N (20~100gf)
- PEELING SPEED: 300 mm/min.
- EACH BAG SHALL BE INCLUDED DESICCANT.

400	11	4400 PCS	-- KG	--KG
PCS/ REEL	REELS/ CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS		
A0	新图面发行	22.03.11		SIZE: A4	LINEAR	ANGLES	APPROVED	Frey Yang	22.03.11	N3A-FE030DRLB3-A001		ENDE05	
			0.0±0.30		X° REF±6°	DESIGNER	Daniel Dong	22.03.11	TITLE				
			0.00±0.25	X° ±3°	DRAWN	WZS	22.03.11	USB3.0 AF RVS CH=0.30 H2.4 L=13.8 DIP		REV		A0	SHEET