
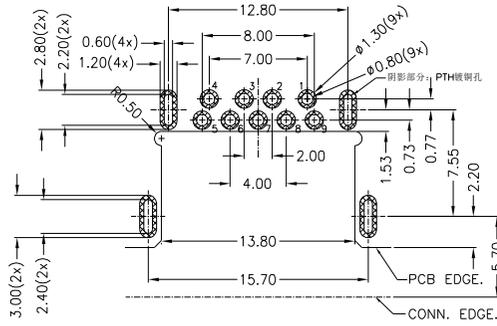









Date Code说明:
 YY MM DD
 DAY (01~31)
 Month(01~12)
 YEAR (22~2022)

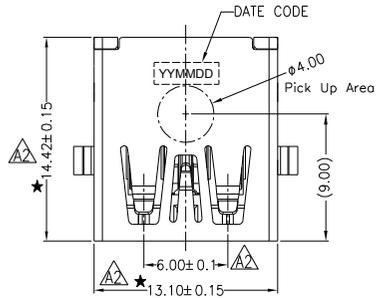

- NOTES:
- MECHANICAL CHARACTERISTIC
 - Mating Force: 25N Max. Unmating Force: 10~25N
 - Contact retention: 5N/pin min after IR
 - ELECTRICAL CHARACTERISTIC
 - Rating Voltage:30V AC.
 - Current Rating:1.8A(For VBUS And GND Pin)△ Other Contacts 0.25A
 - Contact Resistance: 30m Ohm Max,after 10m Ohm
 - Insulation Resistance: 1000M Ohm Min
 - Dielectric Withstanding Voltage: 500V AC Min
 - Meet Gen2.
 - TEMPERATURE
 - Operating Temperature: -40°C~+85°C
 - Salt Spray: 48Hours.
 - Burr: 0.05mm Max.
 - Tape and reel packing satisfy EIA-364-481-D standard.
 - Dimension marked △ should 100% CCD inspecte
 Dimension marked ▲ should CPK>1.33
 Dimension marked ★ should SIP inspecte by QC and IQC
 - ORDER INFORMATION:

N3A-F E065 D R 9 A 3-A0 01
 1 2 3 4 5 6 7 8 9 10

- N3A:USB 3.0 A TYPE
- F:FEMALE
- E065=反向中心高-0.65mm
- D:DIP
- R:90°
- 9:9T
- COLOR A:黑色
- 3:直角
- TYPE码: A0:不带翻边
- Contact Area plating on contacts
 01: Au 1u"

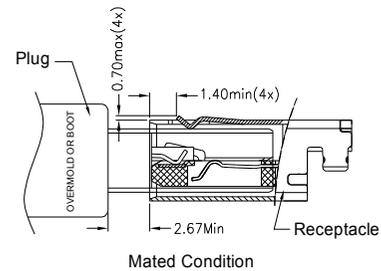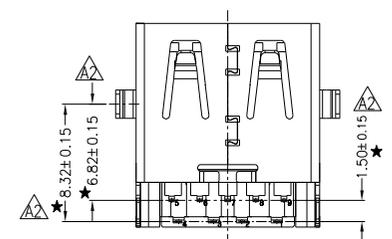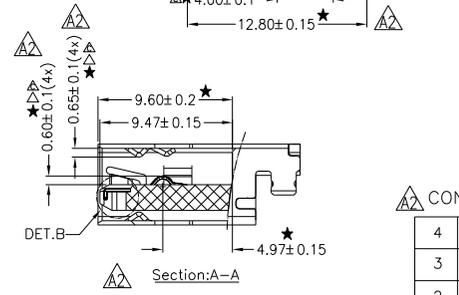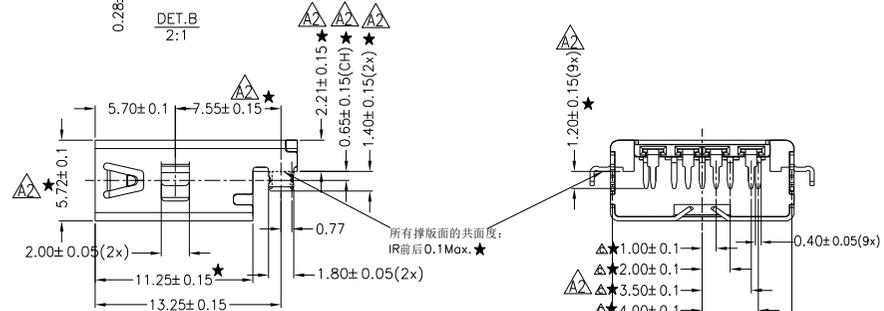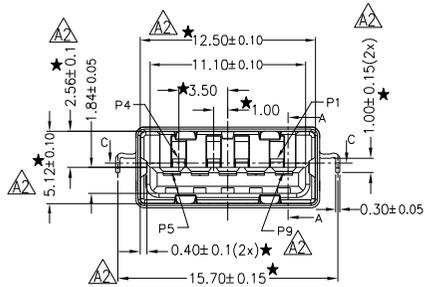

CONNECTOR BOM:

ITEM	PART NAME	QTY	MATERIA	FINISH/PLATING
4	HOUSING	1	PA9T	BLACK,UL94 V-0
3	SHELL	1	SUS201-H,T=0.30	NI 50u"MIN PLATED OVER ALL
2	4P CONTACT	4	C5191-H,T=0.20	CONTACT AREA 1u"MIN,SOLDER AREA PLATING 80u"MIN MATTE TIN,UNDER PLATING 50u"MIN NICKEL
1	5P CONTACT	5	C2680-H,T=0.20	

Contact Number	Signal Name
PIN1	VBUS
PIN2	D-
PIN3	D+
PIN4	GND
PIN5	SkdA_SSRX-
PIN6	SkdA_SSRX+
PIN7	GND_DRAIN
PIN8	SkdA_SSTX-
PIN9	SkdA_SSTX+
Shell	Shield

REV.	REVISION RECORD	DATE	SCALE	NAME	DATE	PART NO.	DWG NO.	JCTC® TERMINAL&CONNECTORS			
A0	新图面发行	21.12.02	1:1	Frey Yang	22.02.15	N3A-FE065DR9A3-A001	ENDE05				
A1	结构更新 ▲	21.12.02	APPROVED	Daniel Dong	22.02.15	TITLE					
A2	更新图面及公差 ▲▲	22.02.15	DESIGNER	Micky Ma	22.02.15	USB3.1 AF R/A RVS DIP TYPE CH=-0.65mm					
			DRAWN								
			GENERAL TOLERANCES					REV	A2	SHEET	1/1

环保物料


PACKAGING INSTRUCTION:

1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON
ALL CARTONS CLOSURES MUST BE DONE WITH TAPE.
2. FILL PACKAGING REEL WITH THE QUANTITIES AS INDICATED
IN THE CHART.


PRODUCT P/N	PARTS PER SHIPPING CARTON	PARTS PER REEL (S.P.Q.)	TOTAL REELS PER PRIMARY CARTON
N3A-FE065DR9A3-A0xx	4000 (PCS)	400 (PCS)	10

1. QUANTITY: 400 PCS

2. COVER TAPE PEELING FORCE:

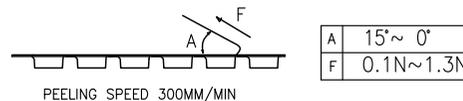

3. PART DIMENSIONS MEET EIA-481-D REQUIREMENT


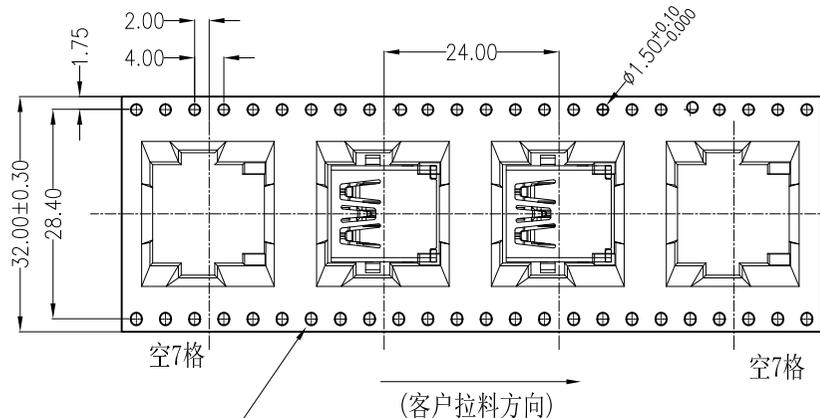


1.50^{+0.1}₋₀

1.70^{+0.1}_{-0.05}

(客户拉料方向)

0.50

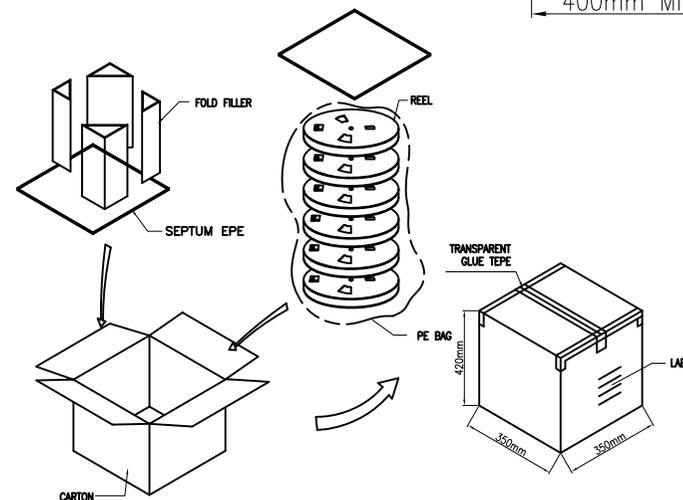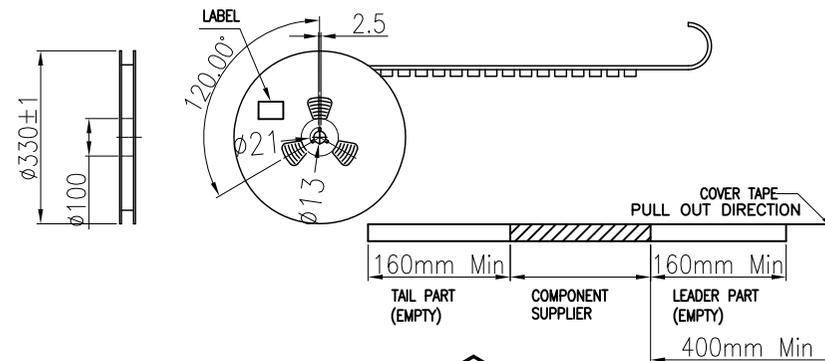

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 JCTC ® TERMINAL&CONNECTORS	
A0	新图面发行	21.12.02		LINEAR	ANGLES	1:1	Frey Yang	21.12.06	N3A-FE065DR9A3-A0xx	ENDE05		
			UNIT: MM	0.00±0.25	X° ±3°	DESIGNER	Daniel Dong	21.12.06	TITLE			
			SIZE: A4	0.00±0.10	X° X' ±2°	DRAWN	Micky Ma	21.12.06	USB3.1 AF R/A RVS DIP TYPE CH=-0.65mm			REV

REV	A0	SHEET	1/1
-----	----	-------	-----