

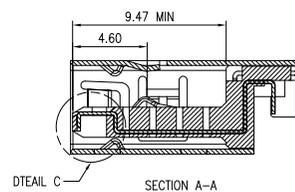
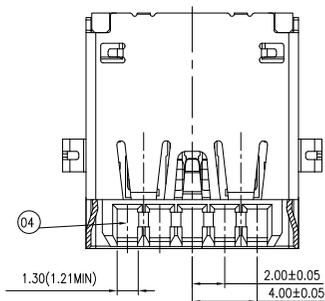


环保物料

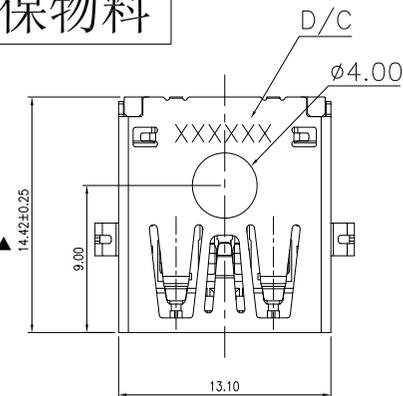

NOTE:

1.MATERIAL:

- 1.1 INSULATOR:PA 9T, UL 94 V-0;
- 1.2 4PIN CONTACT:C5191(T=0.25mm)
- 1.3 5PIN CONTACT:C2680(T=0.20mm)
- 1.4 SHELL:SUS304(T=0.30mm)

2.ELECTRICAL CHARACTERISTICS;





- 2.1 Current Rating:1.8A
- 2.2 Insulation Resistance:100MΩ Min
- 2.3 Contact Resistance:30mΩ Max
- 2.4 Dielectric Withstanding Voltage:500V AC
- 2.5 OPERATING TEMPERATURE:-40°C ~ 85°C

3. MECHANICAL CHARACTERISTICS:

- 3.1 MATING FORCE: 35 N Max
- 3.2 UNMATED FORCE:10~35 N INITIAL; 8~35 N AFTER TEST
- 3.3 DURABILITY:5,000 CYCLES

4.PLATING SPECIFICATION:

- 4.1 CONTACTS:Ni 80u" MIN. UNDER PLATED,Au 30u" MIN. PLATED ON THE MATING AREA OF CONTACT.
- 4.2 FRONT SHELL:Ni 50u"MIN. UNDER PLATED OVER ALL.
- 4.3 Salt Spray 48H,Solder area don't included

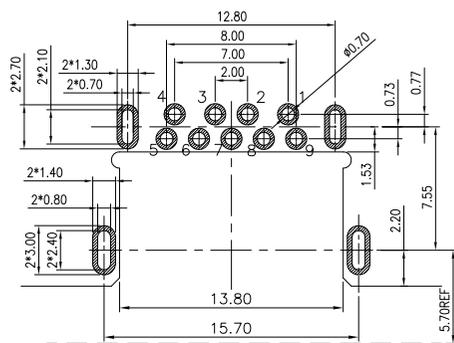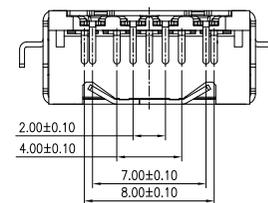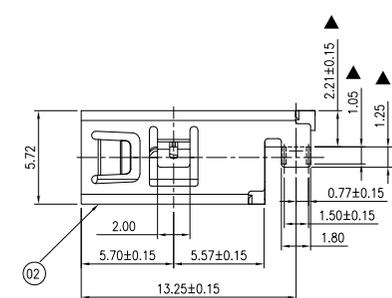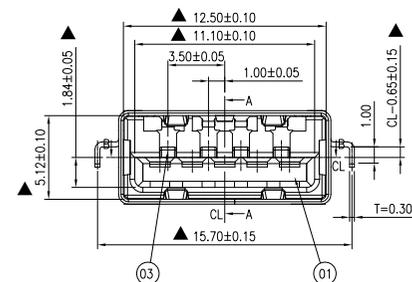


TOLERANCE: ±0.05, THICKNESS: 1.2mm
RECOMMENDED PCB LAYOUT
(TOP VIEW)

N3A-F E065 D R 9 A 3-AG 30

1 2 3 4 5 6 7 8 9 10

- 1.N3A:U3 A TYPE
 - 2.F:FEMALE
 - 3.E065=反向中心高-0.65mm(沉板更多)
 - 4.D:DIP
 - 5.R:90°
 - 6.9:PA9T
 - 7.COLOR A:黑色
 - 8.3:直角
 - 9.TYPE码: AG:不带翻边 高频
 - 10.Contact Area plating on contacts
- 30: Au 30u"

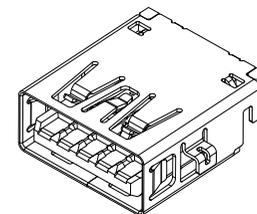

Pin #	SIGNAL NAME	DESCRIPTION	MATING SEQUENCE
1	VBUS	POWER	SECOND
2	D-	USB 2.0 DIFFERENTIAL PAIR	THIRD
3	D+		
4	GND	GROUND FOR POWER RETURN	SECOND
5	StdA_SSRX-	SUPERSPEED RECEIVER DIFFERENTIAL PAIR	LAST
6	StdA_SSRX+		
7	GND_DRAIN	GROUND FOR SIGNAL RETURN	
8	StdA_SSTX-	SUPERSPEED TRANSMITTER DIFFERENTIAL PAIR	
9	StdA_SSTX+		
Shell	Shield	CONNECTOR METAL SHELL	FRIST

REV.	REVISION RECORD	DATE
A0	新图面发行	21.12.08

UNIT: MM	GENERAL TOLERANCES	
	LINEAR	ANGLES
	0.0±0.30	X° REF±6°
	0.00±0.25	X° ±3°

SCALE	NAME	DATE
1:1	Frey Yang	21.12.08
DESIGNER	Daniel Dong	21.12.08
DRAWN	WZS	21.12.08






PART NO.	TITLE
N3A-FE065DR9A3-AG30	USB3.1 Type-A 9P H=5.72mm CH=-0.65mm RVS DIP TYPE

DWG NO.
ENDE05

JCTC ®			
TERMINAL&CONNECTORS			
REV	A0	SHEET	1/1


环保物料

HF

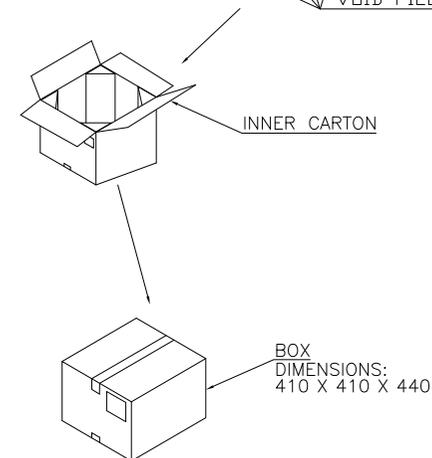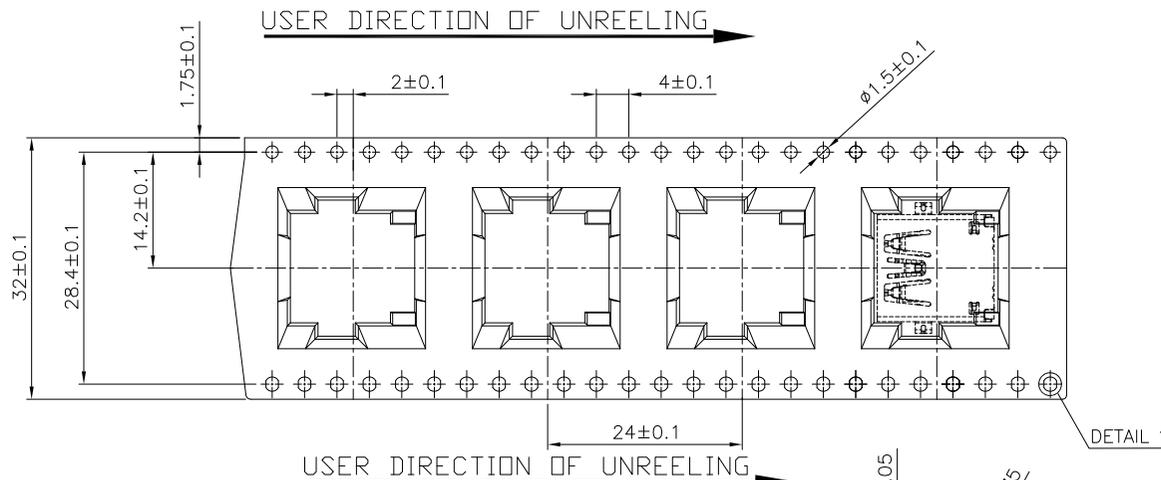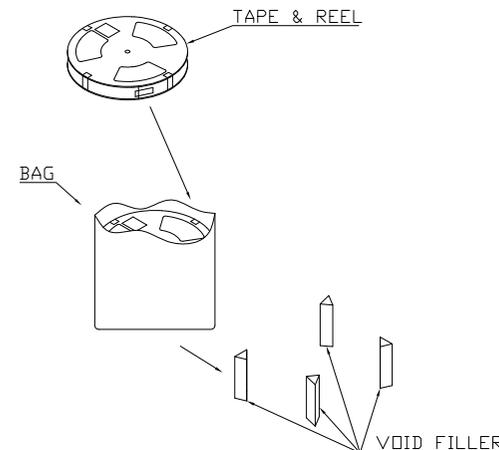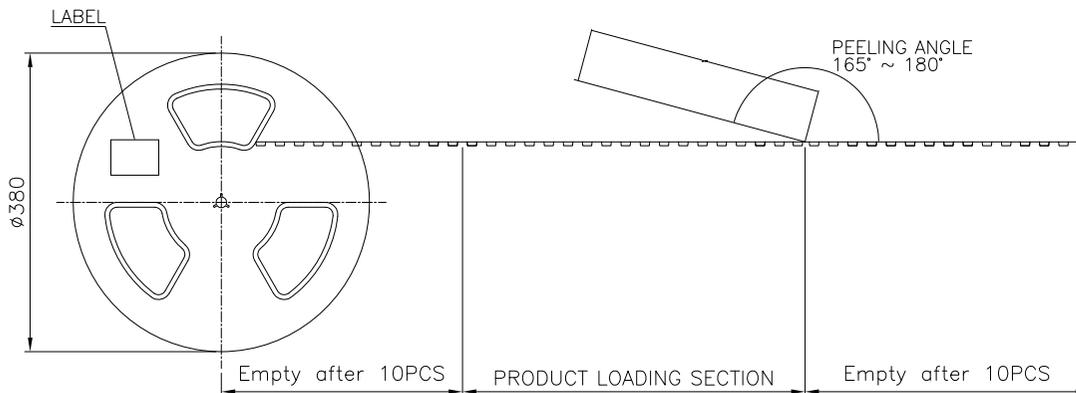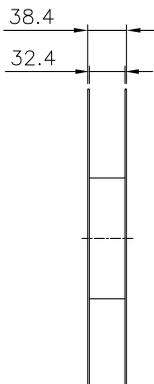

NOTE:

- MATERIAL:
 BOX: FIBRE BOARD, CORRUGATED, DOUBLE WALL (K=K).
 TAPE: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 120°C, TRANSPARENT COLOR (透明色).
 REEL: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 70°C, BLUE COLOR.
 BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C.
- PEELING STRENGTH: 0.2~1.0N (20~100gf)
- PEELING SPEED: 300 mm/min.
- EACH BAG SHALL BE INCLUDED DESICCANT.



600	11	6600 PCS	-- KG	-- KG
PCS/ REEL	REELS/ CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
A0	新图面发行	21.12.08		LINEAR	ANGLES	APPROVED				N3A-FE065DR9A3-AG30				ENDE05
			SIZE: A4	0.00±0.20	X° ±3°	DESIGNER			TITLE		REV	AO	SHEET	2/2
				0.00±0.10	X° X' ±2°	DRAWN	王正顺	21.12.08	USB3.1 Type-A 9P CH=-0.65mm RVS DIP TYPE 包装规范					