
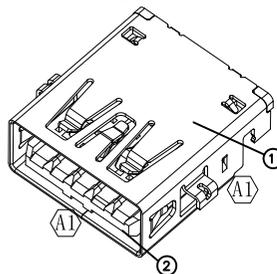
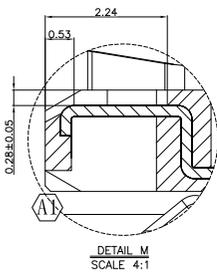
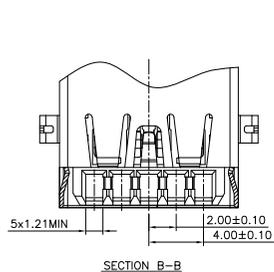


环保物料

HF




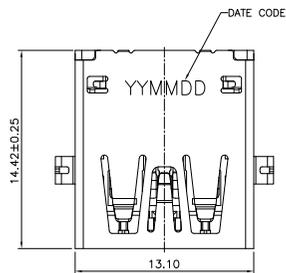


NOTE:

- ELECTRICAL CHARACTERISTICS:
 - Current Rating:3.0A
 - Insulation Resistance:1000Ω Min
 - Contact Resistance:30mΩ Max
 - Dielectric Withstanding Voltage:500V AC
 - OPERATING TEMPERATURE:-30° C ~ 85° C
- MECHANICAL CHARACTERISTICS:
 - MATING FORCE:2.0 kgf MAX
 - UNMATED FORCE:0.7~2.0 kgf.
 - DURABILITY:5,000 CYCLES
- PLATING SPECIFICATION:
 - CONTACTS:Ni 50u" MIN. UNDER PLATED, GOLD FLASH PLATED ON THE MATING AREA OF CONTACT. MATTE Sn 100u" MIN. PLATED ON THE SOLDER TALL.
 - FRONT SHELL:BLACK Ni 50u"MIN. UNDER PLATED OVER ALL.
- PART NUMBER:

N3A-F E065 D R 9 A 3-G2 01
1 2 3 4 5 6 7 8 9 10

- N3A:U3 A TYPE
 - F:FEMALE
 - E065=反向中心高-0.65mm
 - D:DIP
 - R:90°
 - 9:PA9T
 - COLOR A:黑色
 - 3:直角
 - TYPE码: G2:不带翻边 GEN2
 - Contact Area plating on contacts
- 01: G/F

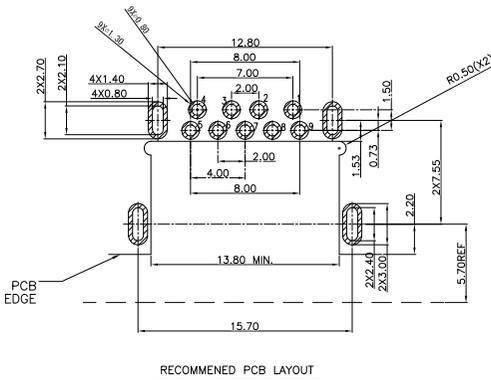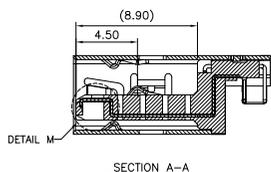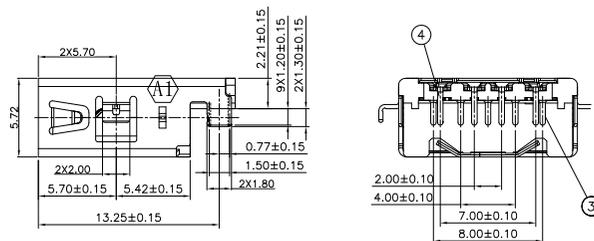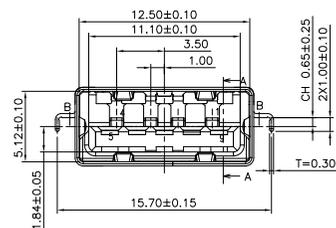

Pin #	SIGNAL NAME	DESCRIPTION	MATING SEQUENCE
1	VBUS	POWER	SECOND
2	D-	USB 2.0 DIFFERENTIAL PAIR	THIRD
3	D+		
4	GND	GROUND FOR POWER RETURN	SECOND
5	StdA_SSRX-	SUPERSPEED RECEIVER DIFFERENTIAL PAIR	LAST
6	StdA_SSRX+		
7	GND_DRAIN	GROUND FOR SIGNAL RETURN	
8	StdA_SSTX-	SUPERSPEED TRANSMITTER DIFFERENTIAL PAIR	
9	StdA_SSTX+		
Shell	Shield	CONNECTOR METAL SHELL	FRIST

ITEM	NAME	Q'TY	MATERIAL / FINISH
4	4 PIN CONTACT	4	COPPER ALLOY / T=0.25mm
3	5 PIN CONTACT	5	COPPER ALLOY / T=0.20mm
2	HOUSING	1	PA9T BALCK /UL 94 V-0
1	SHELL	1	METAL / BLACK Ni PLATED /T=0.30mm

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE 1:1	NAME	DATE	PART NO.	DWG NO.
A0	新图面发行	22.05.24	LINEAR	APPROVED	Frey Yang	23.01.05	N3A-FE065DR9A3-G201	ENDE05
A1	增加防反插及改善落球测试凸台	22.05.25	0.0±0.30	DESIGNER	Daniel Dong	23.01.05		
A2	更正描述外壳料厚	23.01.05	0.00±0.25	DRAWN	Micky Ma	23.01.05	TITLE	
			0.000±0.10				USB3.1 AF RVS CH=-0.65 H2.21 L14.42 DIP Gen2 10G	





TERMINAL&CONNECTORS






REV A2 SHEET 1/2

环保物料

HF

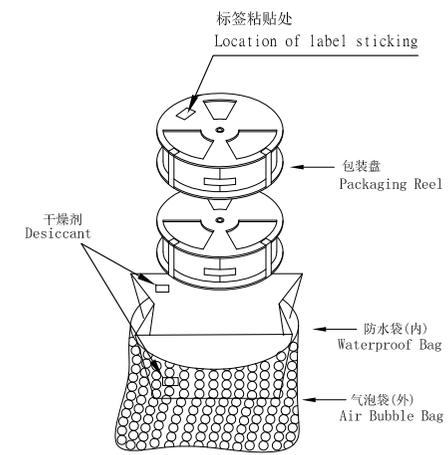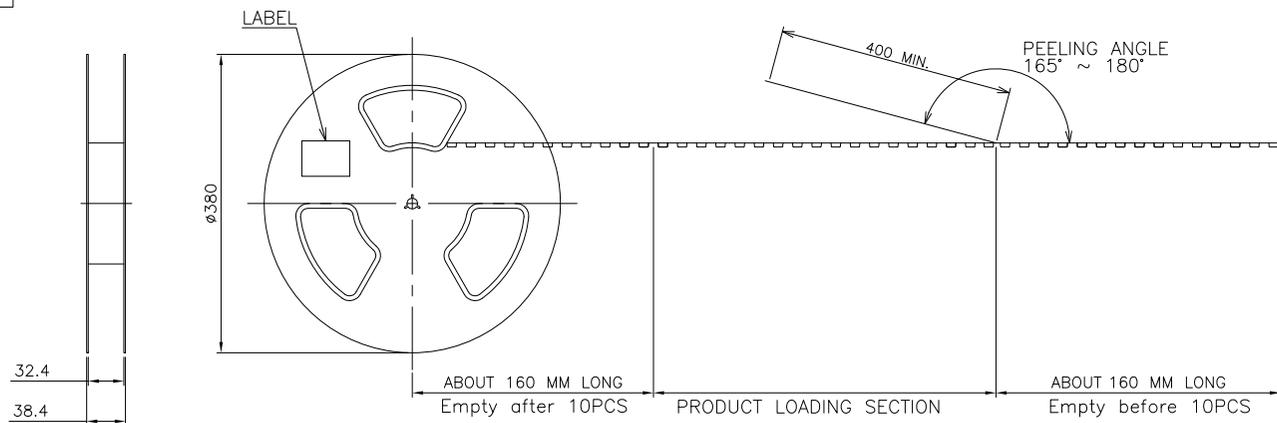

USER DIRECTION OF UNREELING

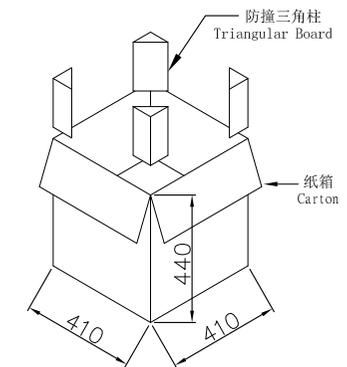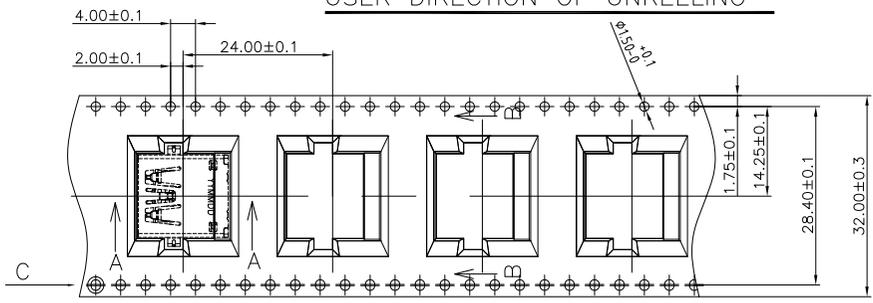

NOTE:

- MATERIAL:
 BOX: FIBRE BOARD, CORRUGATED, DOUBLE WALL (K=K).
 TAPE: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 120°C, TRANSPARENT COLOR (透明色).
 REEL: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 70°C, BLUE COLOR.
 BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C.
- PEELING STRENGTH: 0.2~1.0N (20~100gf)
- PEELING SPEED: 300 mm/min.
- EACH BAG SHALL BE INCLUDED DESICCANT.

600	11	6600 PCS	-- KG	-- KG
PCS/ REEL	REELS/ CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO. N3A-FE065DR9A3-G201	DWG NO. ENDE05	 TERMINAL&CONNECTORS			
A0	新图面发行	22.05.24		LINEAR	ANGLES	APPROVED	Frey Yang	23.01.05						
A1	增加防反插及改善落球测试凸台	22.05.25		0.0±0.30	X° REF±6°	DESIGNER	Daniel Dong	23.01.05						
A2	更正描述外壳料厚	23.01.05		0.00±0.25	X° ±3°	DRAWN	Micky Ma	23.01.05						
			UNIT: MM	0.00±0.25	X° ±3°	TITLE USB3.1 AF RVS CH=-0.65 H2.21 L14.42 DIP Gen2 10G			REV	A2	SHEET	2/2		