

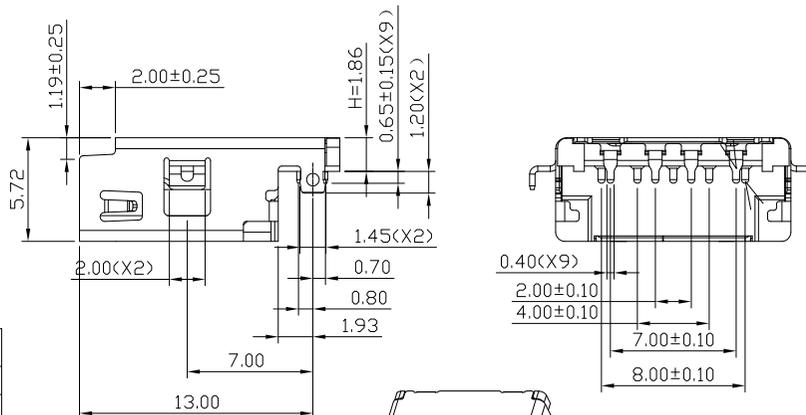
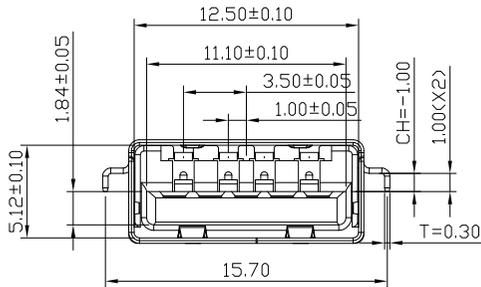
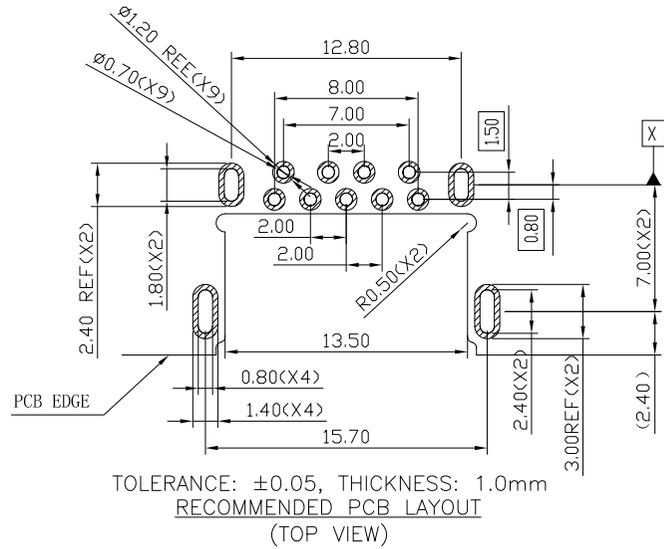


环保物料

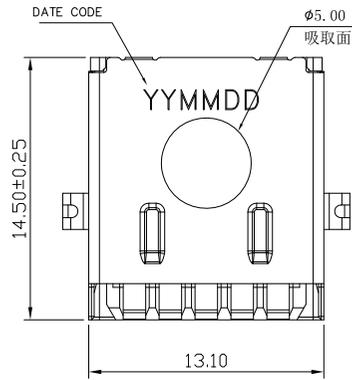

3D VIEW

NOTES:

- ELECTRICAL CHARACTERISTIC:
 - Current Rating: 1.5A
 - INSULATION RESISTANCE: 1000 M MINIMUM.
 - CONTACT RESISTANCE: 30 MAX
 - Dielectric Withstanding Voltage: 500V AC
 - OPERATING TEMPERATURE: -30°C~85°C
- MECHANICAL CHARACTERISTIC:
 - MATING FORCE: 0.7-2.0kgf
 - UNMATING FORCE: 0.7-2.0kgf
 - DURABILITY: 5000CYCLES
- PLATING SPECIFICATION
 - CONTACTS: Ni 50u" MIN UNDER PLATED, Au PLATED ON THE MATING AREA OF CONTACT MATTE Sn 100u" Min PLATED ON THE SOLDER TALL
 - SHELL: BLACK NI 50u" Min . PLATED OVER ALL

USB 3.0 PIN ASSIGNMENTS

Pin #	SIGNAL NAME	DESCRIPTION	MATING SEQUENCE
1	VBUS	POWER	SECOND
2	D-	USB 2.0 DIFFERENTIAL PAIR	THIRD
3	D+		
4	GND	GROUND FOR POWER RETURN	SECOND
5	StdA_SSRX-	SUPERSPEED RECEIVER DIFFERENTIAL PAIR	LAST
6	StdA_SSRX+		
7	GND_DRAIN	GROUND FOR SIGNAL RETURN	
8	StdA_SSTX-	SUPERSPEED TRANSMITTER DIFFERENTIAL PAIR	
9	StdA_SSTX+		
Shell	Shield	CONNECTOR METAL SHELL	FRIST

N3A-F	E100	D	R	L	A	3-DO	XX
1	2	3	4	5	6	7	8 9 10

- N3A:U3 A TYPE
- F:FEMALE
- E100=反向沉板-1.00mm
- D:DIP
- R:90°
- L:LCP
- COLOR A:黑色
- 3:直角
- TYPE码:
- Contact Area plating on contacts

01: G/F	02: Au 2u"
05: Au 5u"	10: Au 10u"
15: Au 15u"	30: Au 30u"

4	4 PIN CONTACT	4	C5191 / T=0.20mm
3	5 PIN CONTACT	5	C2680 / T=0.25mm
2	5 PIN HOUSING	1	COLOR:SEE P/N, LCP UL94 V-0
1	SHELL	1	SUS430 / Ni PLATED
ITEM	NAME	Q' TY	MATERIAL / FINISH

一般公差 GENERAL TOLERANCE

X.X	±0.30	X°	±5°
X.XX	±0.20	X.X°	±3°
X.XXX	±0.10	▲	MAJOR DIM.

绘图 DR.
校对 CHK.
审核 CHK.
核准 APPD.

料号 PART NO.

N3A-FE100DRLA3-DOXX

文件编号 NUMBER

ENDPT01

品名 TITLE

USB3.2 AF RVS CH=-1.00 H1.86 L14.50 DIP Gen2

JGTC[®]
TERMINAL&CONNECTORS


比例 SCALE	SHEET	版次 REV.
1:1	1/1	A0

单位 UNIT
mm





版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.
A0	21.07.14	新图面发行	董东平	杨章雄


环保物料

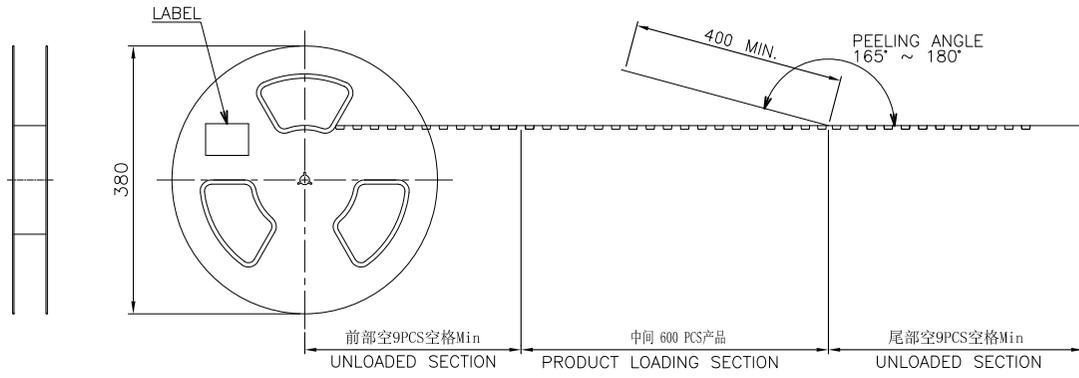

USER DIRECTION OF UNREELING

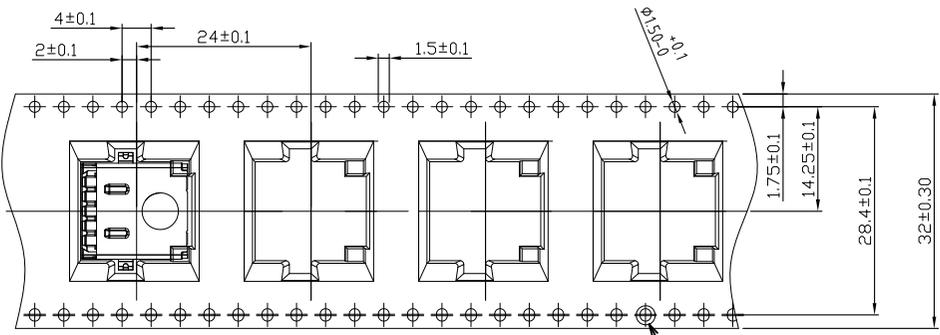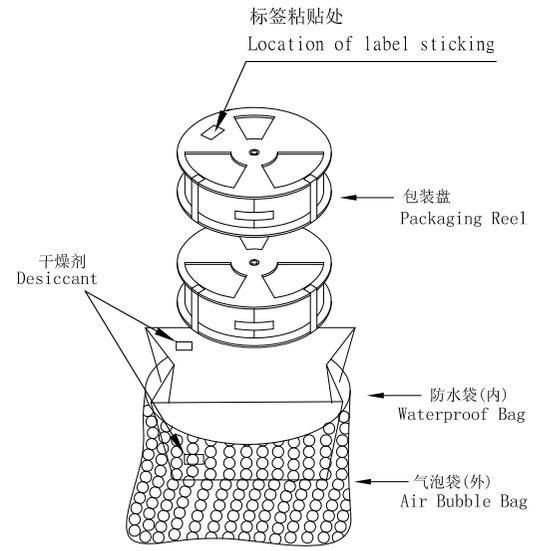

USER DIRECTION OF UNREELING

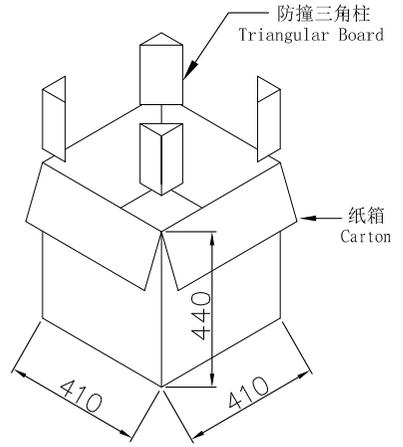

- NOTE:
- MATERIAL:
 BOX: FIBRE BOARD, CORRUGATED, DOUBLE WALL (K=K).
 TAPE: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 120°C, TRANSPARENT COLOR. (透明色)
 REEL: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 70°C, BLUE COLOR.
 BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C.
 - PEELING STRENGTH: 0.2~1.0N (20~100gf)
 - PEELING SPEED: 300 mm/min.
 - EACH BAG SHALL BE INCLUDED DESICCANT.

600	10	6000 PCS	-- KG	--KG
PCS/ REEL	REELS/ CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT

					一般公差GENERAL TOLERANCE		绘图DR.		料号 PART NO.		文件编号 NUMBER		 TERMINAL&CONNECTORS				
					X.X ±0.30	X° ±5°	校对CHK.		N3A-FE100DRLA3-D005		ENDPT01						
					X.XX ±0.20	X.X° ±3°	审核CHK.		品名TITLE								
					X.XXX ±0.10	▲ MAJOR DIM.	核准APPD.		USB3.2 AF RVS CH=-1.00 H1.86 L14.50 DIP Gen2								
A0	21.07.14	新图面发行	董东平	杨章雄	单位UNIT	mm		核准APPD.				比例SCALE		SHEET		版次REV.	
版次REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.							1:1		1/1		A0		