

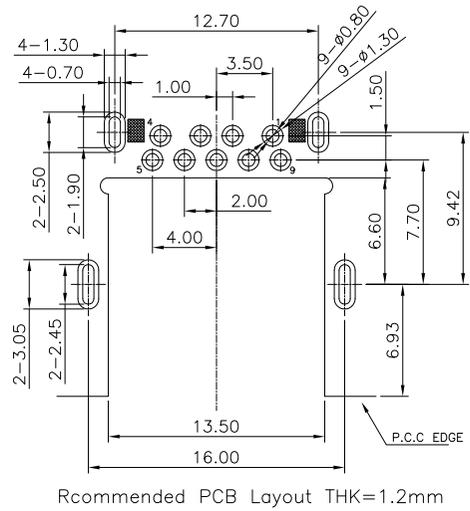
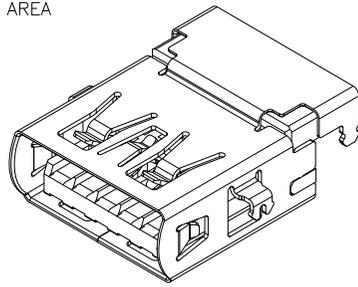
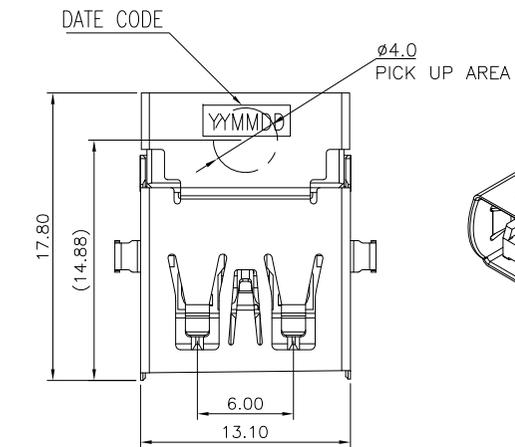
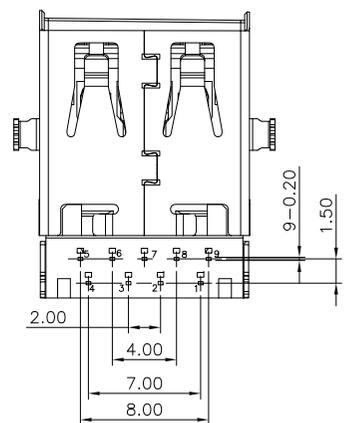



环保物料

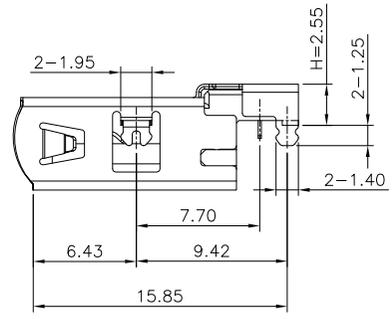

NOTE:

- MATERIAL:
 - INSULATOR: PA9T BLACK
 - CONTACT: 4P C5191 T=0.20mm
 - CONTACT: 5P C5191 T=0.20mm
 - SHELL:SUS 304
- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE:30mΩ MAX
 - CONTACT CURRENT RATING:1.8A
 - DIELECTRIC WITHSTANDING VOLTAGE:100 V R.M.S.
 - INSULATION RESISTANCE 100 MΩ MIN
 - OPERATING TEMPERATURE:-40°C ~ 85°C
 - APPLIED VOLTAGE RATING:30V AC
- MECHANICAL CHARACTERISTICS:
 - MATING FORCE:30 N MAX.
 - REMOVAL FORCE: 7N ~30N;
 - DURABILITY:MANDATORY:5,000 CYCLES
 - SALT SPRAY 48HR PASS.
- PLATING
 - TERMINAL:
 - 80u" MIN NICKEL ALL OVER
 - 100u"MIN MATTE-Tin ON SOLDER AREA
 - 5u"Au ON CONTACT AREA
 - SHELL:50u"MIN.BLACK NICEL ALL OVER
- PART NO.

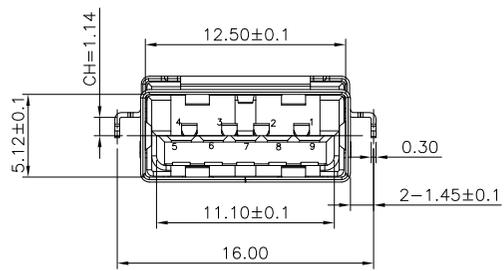

USB 3.0 PIN ASSIGNMENTS

Pin #	SIGNAL NAME	DESCRIPTION	MATING SEQUENCE
1	VBUS	POWER	SECOND
2	D-	USB 2.0 DIFFERENTIAL PAIR	THIRD
3	D+		
4	GND	GROUND FOR POWER RETURN	SECOND
5	StdA_SSRX-	SUPERSPEED RECEIVER DIFFERENTIAL PAIR	LAST
6	StdA_SSRX+		
7	GND_DRAIN	GROUND FOR SIGNAL RETURN	
8	StdA_SSTX-	SUPERSPEED TRANSMITTER DIFFERENTIAL PAIR	
9	StdA_SSTX+		
Shell	Shield	CONNECTOR METAL SHELL	FRIST


N3A-F E114 D R 9 A 3-CO XX
1 2 3 4 5 6 7 8 9 10

- N3A:U3 A TYPE
- F:FEMALE
- E114=反向中心高-1.14mm
- D:DIP
- R:90°
- 9T
- COLOR A:黑色
- 3:直角
- TYPE码:
- Contact Area plating on contacts
 - 01: G/F 03: Au 3u"
 - 05: Au 5u" 10: Au 10u"
 - 15: Au 15u" 30: Au 30u"

一般公差 GENERAL TOLERANCE

X.X ±0.30	X* ±5°
X.XX ±0.20	X.X* ±3°
X.XXX ±0.10	▲ MAJOR DIM.

单位 UNIT mm



绘图 DR. 王正顺
校对 CHK. 董东平
审核 CHK. 董东平
核准 APPD. 杨章雄

料号 PART NO. N3A-FE114DR9A3-COXX
品名 TITLE USB3.2 AF RVS CH=-1.14 H2.55 L17.8 DIP Gen2
框口削弧形




文件编号 NUMBER ENDPT01

JGTC[®]
TERMINAL&CONNECTORS

比例 SCALE 1:1
SHEET 1/1
版次 REV. AO

AO	21.07.26	新图面发行	董东平	杨章雄
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.

环保物料

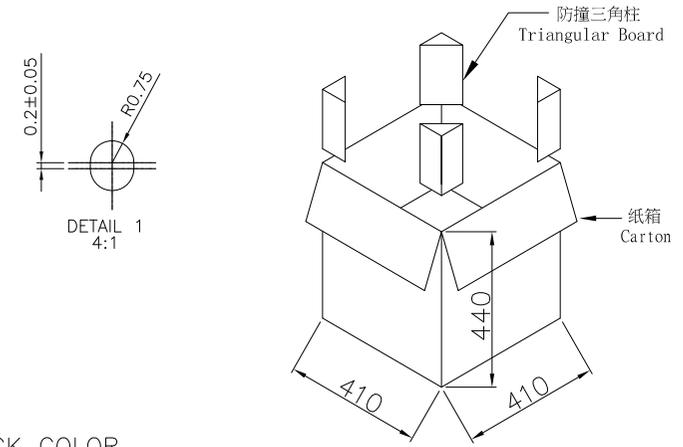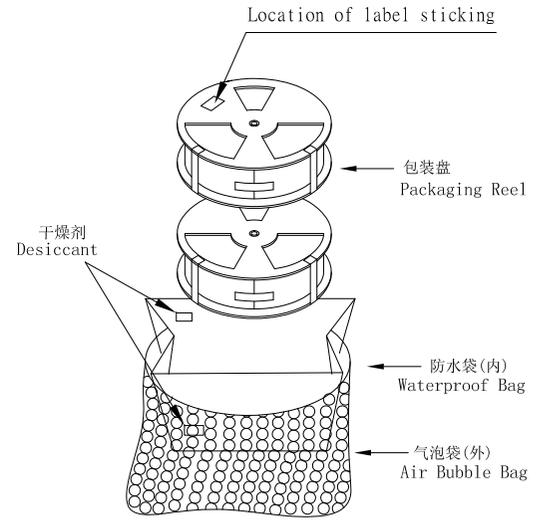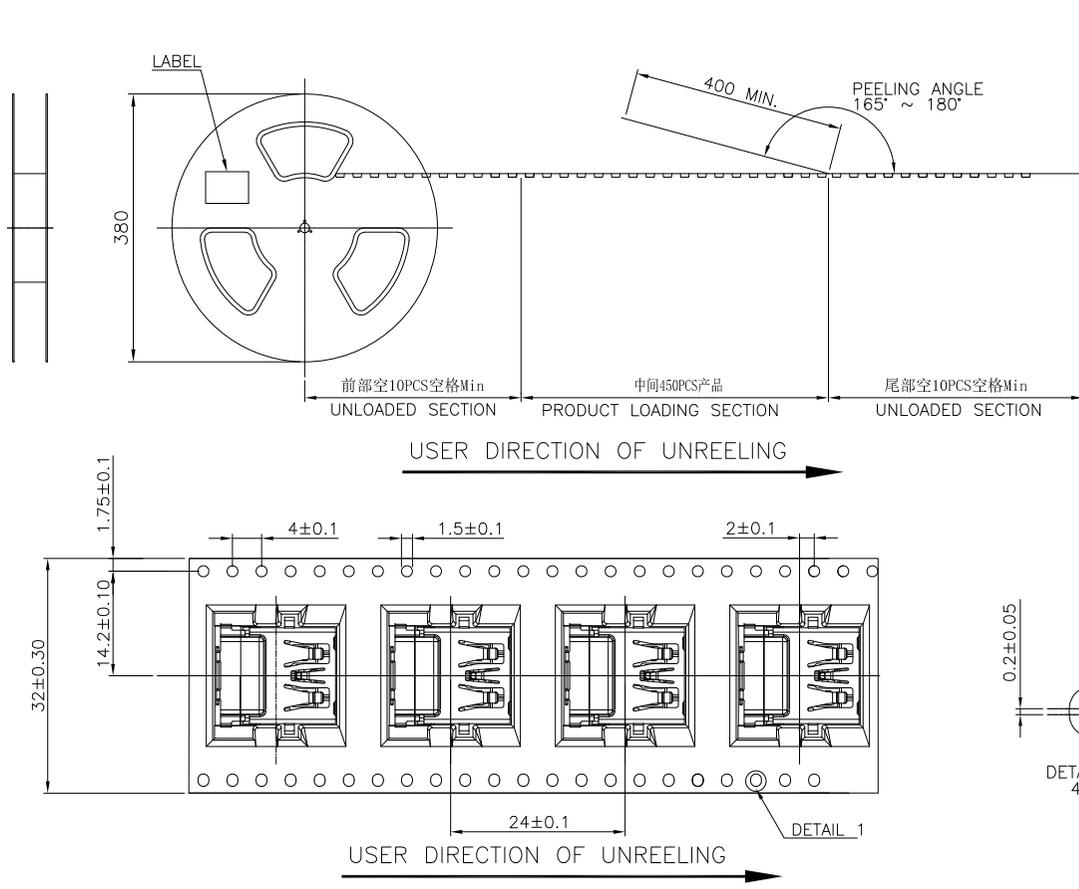

NOTE:

- MATERIAL:
 BOX: FIBRE BOARD, CORRUGATED, DOUBLE WALL (K=K).
 TAPE: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 120°C, TRANSPARENT OR BLACK COLOR.
 REEL: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 70°C, BLUE COLOR.
 BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C.
- PEELING STRENGTH: 0.2~1.0N (20~100gf)
- PEELING SPEED: 300 mm/min.
- EACH BAG SHALL BE INCLUDED DESICCANT.

450	11	4950 PCS	-- KG	--KG
PCS/ REEL	REELS/ CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT

					一般公差 GENERAL TOLERANCE		绘图 DR.	王正顺	料号 PART NO.		文件编号 NUMBER		 TERMINAL&CONNECTORS		
					X.X ±0.30	X' ±5°	校对 CHK.	董东平	N3A-FE114DR9A3-COXX		ENDPT01				
					X.XX ±0.20	X.X' ±3°	审核 CHK.	董东平	品名 TITLE		USB3.2 AF RVS CH=-1.14 H2.55 L17.8 DIP Gen2		比例 SCALE	SHEET	版次 REV.
A0	21.07.26	新图面发行	董东平	杨章雄	X.XXX ±0.10	▲ MAJOR DIM.	核准 APPD.	杨章雄	框口削弧形		1:1	1/1	AO		
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位 UNIT	mm									