

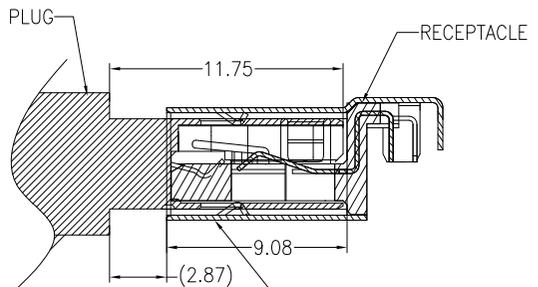
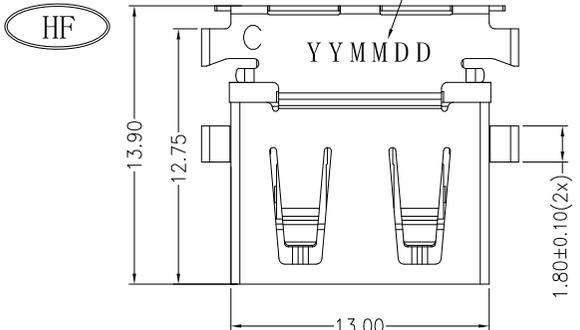
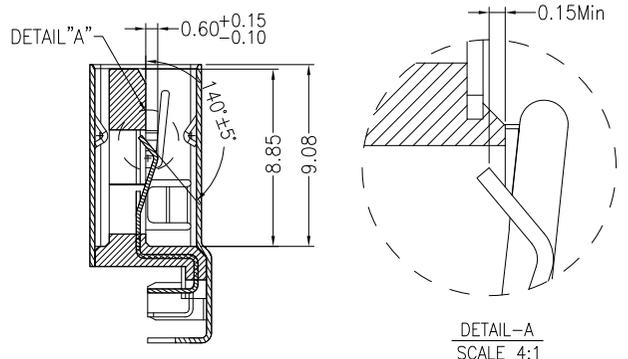
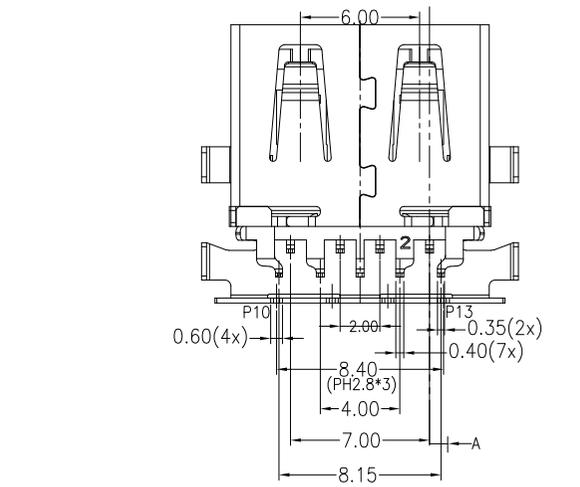


环保物料

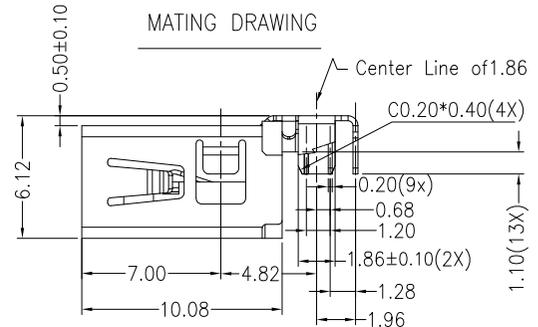

Finger Spring extrudes the surface no more than 0.47mm till horizontal mating

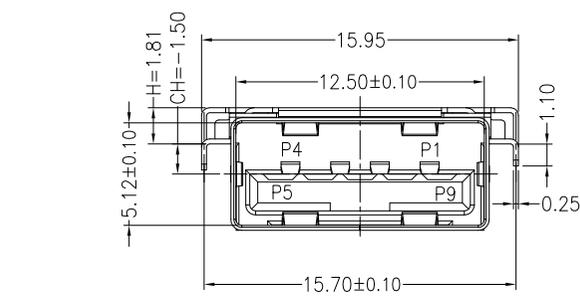

NOTE:

- 1.MATERIAL:
 - 1.1 INSULATOR:LCP130i UL94V-0;BLUE
 - 1.2 CONTACT:C5210-EH(T=0.20mm)
 - 1.3 SHELL:SUS304-H(T=0.25mm)
 - 1.4 CAP:LCP130i UL94V-0;BLCAK
- 2.ELECTRICAL CHARACTERISTICS;
 - 2.1 CONTACTRESISTANCE:30mΩ Max
 - 2.2 CONTACT CURRENT RATING:1.5A
 - 2.3 DIELECTRIC WITHSTANDING VOLTAGE:500 V R.M.S.
 - 2.4 INSULATION RESISTANCE 100 MEGOHMS Min
 - 2.5 OPERATING TEMPERATURE:-40°C ~ 85°C
 - 2.6 SALT SPRAL: TEMPERATURE 35°C±2°C, DENSITY 5%N WEIGHT,PERIOD 48 HOURS.
- 3 MECHANICAL CHARACTERISTICS:
 - 3.1 MATING FORCE:25 N Max
 - 3.2 UNMATED FORCE:7N~27N INITIAL;10000CYCLES: FUNCTION OK.
 - 3.3 DURABILITY:10,000 CYCLES
- 4.PLATING:
 - 4.1 CONTACT: Au PLATING ON THE CONTACT AREA,AND 80u"Sn PLATING ON THE SOLDER AREA WITH 50u"NICKEL UNDER PLATING OVERALL.
 - 4.2 SHELL: Ni PLATING OVERALL.

5.PART NO:

- N3A-F E150 D R L B 3-DO 01
 1 2 3 4 5 6 7 8 9 10
- 1.N3A:U3 A TYPE
 - 2.F:FEMALE
 - 3.E150=反向中心高-1.50mm
 - 4.D:DIP
 - 5.R:90°
 - 6.L:LCP
 - 7.COLOR B:蓝色
 - 8.3:直角
 - 9.TYPE码:DO:短体规格
 - 10.Contact Area plating on contacts
01: G/F


4	CAP	1	LCP130i UL94 V-0	BLACK
3	SHELL	1	SUS304-H T=0.25mm	ALL OVER Ni
2	TERMINAL	9	C5210-EH,T=0.20mm	Au PLATING ON CONTACT ARER Sn 80 u"ON SOLDER AREA ALL OVER Ni 50 u" Min
1	HOUSING	1	LCP130I UL94 V-0	SEE NOTE
NO.	PARTS	Q'TY	MATERIAL	PLATING&COLOUR

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
A0	新图面发行	22.03.11	LINEAR	ANGLES	1:1	Frey Yang	22.03.11	N3A-FE150DRLB3-D001	ENDE05				
			0.0±0.30	X° REF±6°	APPROVED	Daniel Dong	22.03.11	TITLE		REV	AO	SHEET	1/2
			0.00±0.25	X° ±3°	DESIGNER	WZS	22.03.11	USB3.0 AF RVS CH=-1.50 H1.81 L13.9 DIP					
			0.000±0.10	X° X' ±2°	DRAWN								


环保物料

HF



36.4
32.4

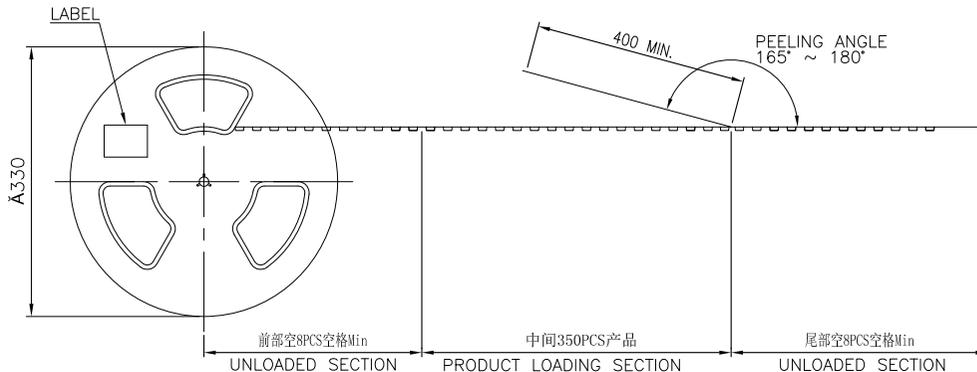

USER DIRECTION OF UNREELING

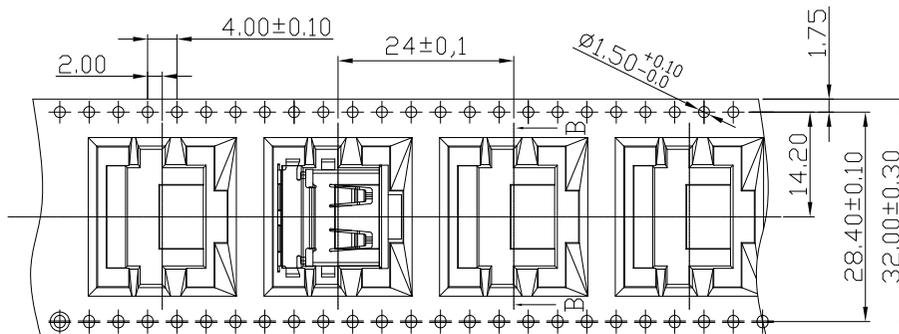

USER DIRECTION OF UNREELING

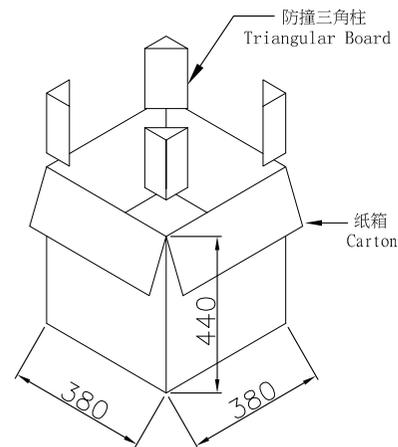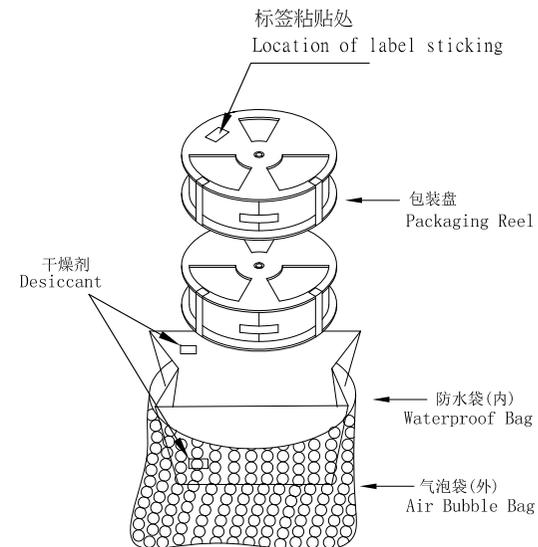

NOTE:

- MATERIAL:
BOX: FIBRE BOARD, CORRUGATED, DOUBLE WALL (K=K).
TAPE: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 120°C, BLACK COLOR.
REEL: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 70°C, BLUE COLOR.
BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C.
- PEELING STRENGTH: 0.2~1.0N (20~100gf)
- PEELING SPEED: 300 mm/min.
- EACH BAG SHALL BE INCLUDED DESICCANT.

350	NA PCS	NA PCS	-- KG	--KG
PCS/ REEL	REELS/ CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS		
A0	新图面发行	22.03.11		LINEAR	ANGLES	APPROVED	Frey Yang	22.03.11	N3A-FE150DRLB3-D001	ENDE05			
			0.0±0.30	X° REF±6°	DESIGNER	Daniel Dong	22.03.11	TITLE					
			0.00±0.25	X° ±3°	DRAWN	WZS	22.03.11	USB3.0 AF RVS CH=-1.50 H1.81 L13.9 DIP					
			SIZE: A4	0.000±0.10	X° X' ±2°					REV	AO	SHEET	1/1