


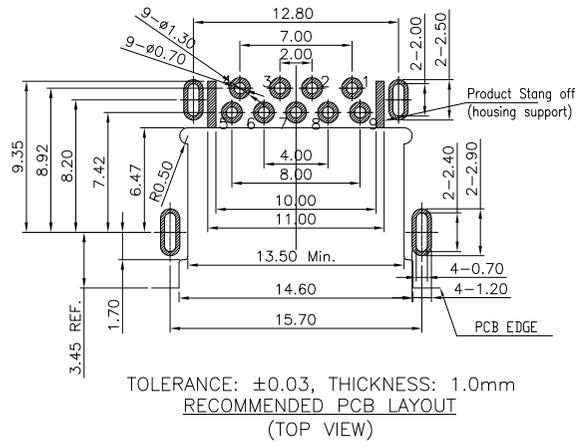
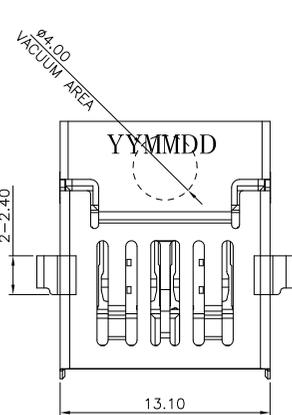
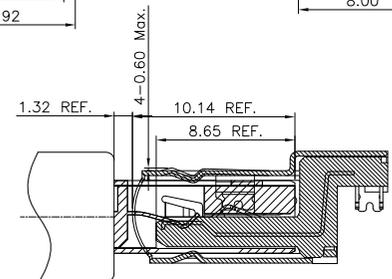





环保物料

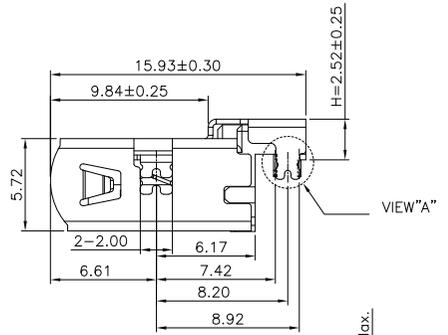

NOTE:

- 1.MATERIAL:
 - 1.1 INSULATOR:PA9T UL94V-0 BLACK
 - 1.2 CONTACT: 4P: C5191 5P:C2680 (T=0.20mm)
 - 1.3 SHELL:SUS 201 (T=0.30mm)
- 2.ELECTRICAL CHARACTERISTICS;
 - 2.1 CONTACT RESISTANCE:30mΩ MAXIMUM
 - 2.2 CONTACT CURRENT RATING:1.8A
 - 2.3 DIELECTRIC WITHSTANDING VOLTAGE:100 V R.M.S.
 - 2.4 INSULATION RESISTANCE 100 MEGOHMS MIN
 - 2.5 OPERATING TEMPERATURE:-40°C ~ 85°C
- 3 MECHANICAL CHARACTERISTICS:
 - 3.1 MATING FORCE:2.0 kgf
 - 3.2 UNMATED FORCE:0.70~2.0kgf
 - 3.3 DURABILITY:5,000 CYCLES
 - 3.4 EXTRACTION FORCE:0.70~2.0kgf kgf
- 4.PLATING
 - 4.1 TERMINAL:
 - 50u" MIN NICKEL ALL OVER
 - 100u"MIN Tin ON SOLDER AREA
 - 1u"Au ON CONTACT AREA
 - 4.2 SHELL:80u"MIN.BLACK NICEL ALL OVER
- 5.PART NO:

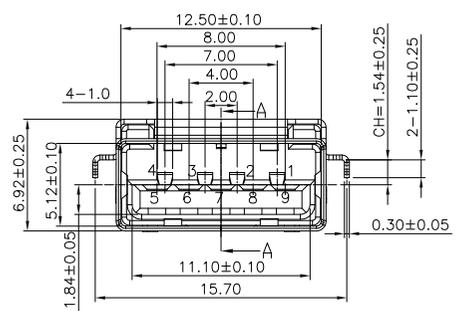

USB 3.0 PIN ASSIGNMENTS

| Pin # | SIGNAL NAME | DESCRIPTION | MATING SEQUENCE |
|-------|-------------|--|-----------------|
| 1 | VBUS | POWER | SECOND |
| 2 | D- | USB 2.0 DIFFERENTIAL PAIR | THIRD |
| 3 | D+ | | |
| 4 | GND | GROUND FOR POWER RETURN | SECOND |
| 5 | StdA_SSRX- | SUPERSPEED RECEIVER DIFFERENTIAL PAIR | LAST |
| 6 | StdA_SSRX+ | | |
| 7 | GND_DRAIN | GROUND FOR SIGNAL RETURN | |
| 8 | StdA_SSTX- | SUPERSPEED TRANSMITTER DIFFERENTIAL PAIR | |
| 9 | StdA_SSTX+ | | |
| Shell | Shield | CONNECTOR METAL SHELL | FRIST |

N3A-F E154 D R 9 A 3-CO XX
1 2 3 4 5 6 7 8 9 10




- 1.N3A:U3 A TYPE
- 2.F:FEMALE
- 3.E154=反向中心高-1.54mm
- 4.D:DIP
- 5.R:90°
- 6.9:9T
- 7.COLOR A:黑色
- 8.3:直角
- 9.TYPE码:
- 10.Contact Area plating on contacts
 - 01: G/F 03: Au 3u"
 - 05: Au 5u" 10: Au 10u"
 - 15: Au 15u" 30: Au 30u"

| | | | | | | | | |
|------------------------|--------------|----------|-----|---------------------|---------|---|-------------|-------------|
| 一般公差 GENERAL TOLERANCE | | | | | 绘图 DR. | 王正顺 | 料号 PART NO. | 文件编号 NUMBER |
| X.X ±0.30 | X* ±5° | 校对 CHK. | 董东平 | N3A-FE154DR9A3-COXX | ENDPT01 | 品名 TITLE USB3.2 AF RVS CH=-1.54 H2.52 L15.93 DIP Gen2 框口削弧形 | | |
| X.XX ±0.20 | X.X* ±3° | 审核 CHK. | 董东平 | 比例 SCALE | | | | |
| X.XXX ±0.10 | ▲ MAJOR DIM. | 核准 APPD. | 杨章雄 | 单位 UNIT | mm | 1:1 | 1/1 | AO |

| | |
|--|--|
| | |
|--|--|

JGTC®
TERMINAL&CONNECTORS

环保物料

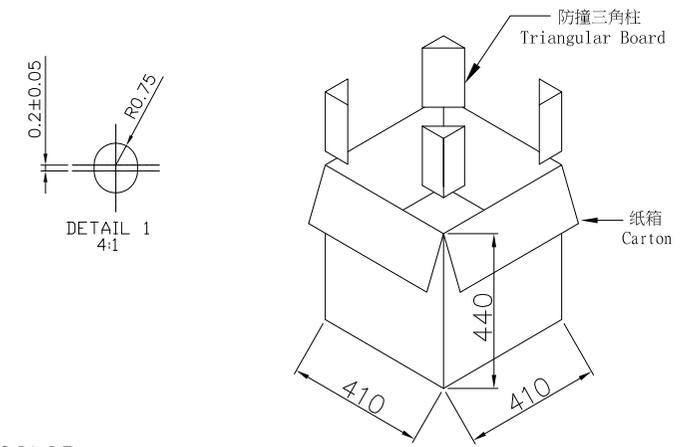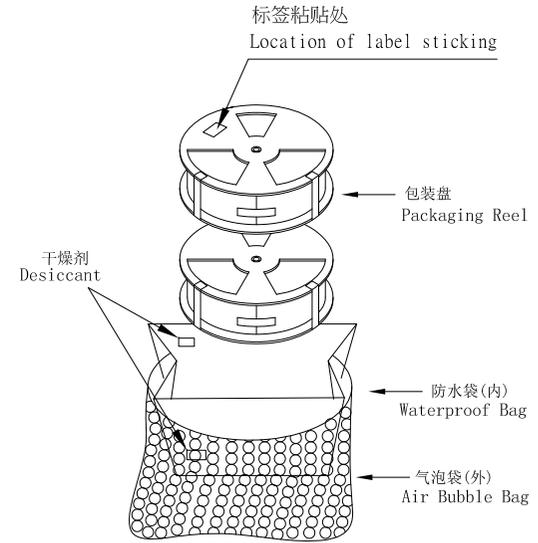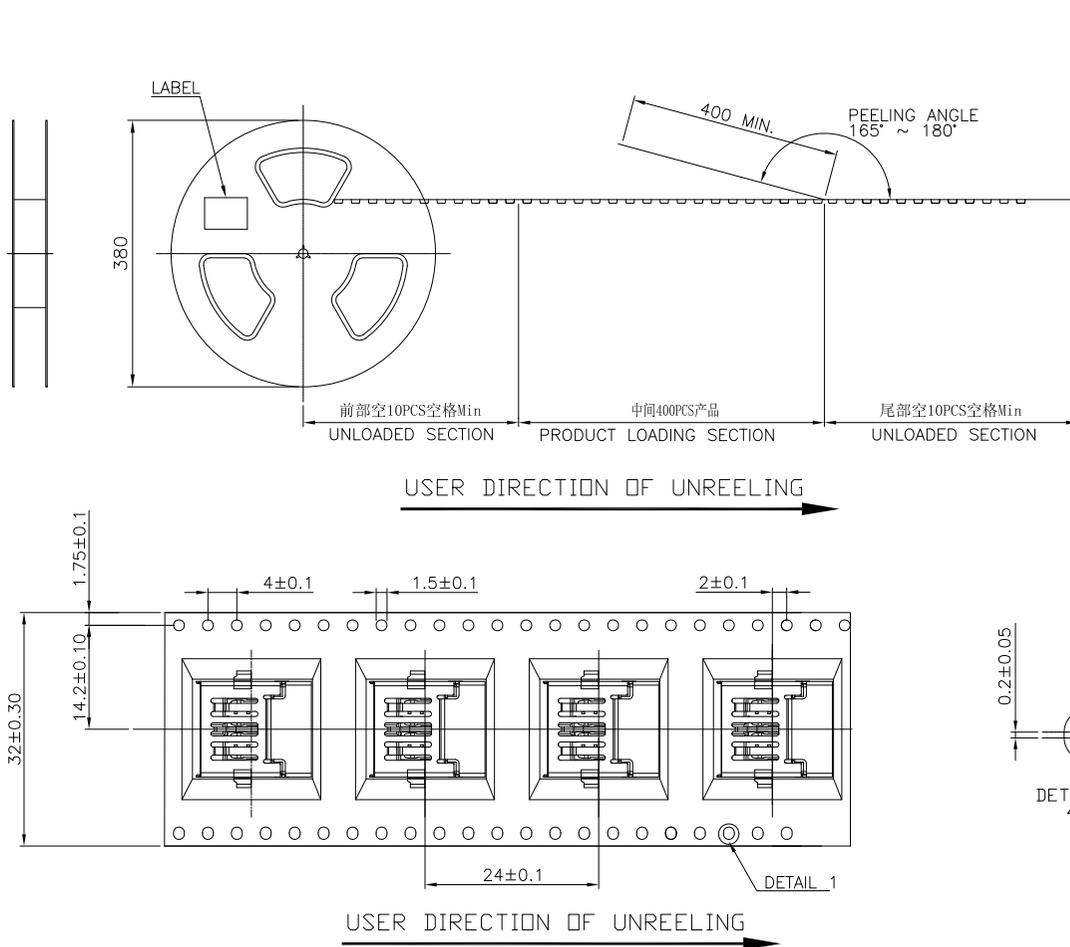

NOTE:

- MATERIAL:
 BOX: FIBRE BOARD, CORRUGATED, DOUBLE WALL (K=K).
 TAPE: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 120°C, TRANSPARENT OR BLACK COLOR.
 REEL: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 70°C, BLUE COLOR.
 BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C.
- PEELING STRENGTH: 0.2~1.0N (20~100gf)
- PEELING SPEED: 300 mm/min.
- EACH BAG SHALL BE INCLUDED DESICCANT.

| | | | | |
|--------------|------------------|----------|-----------------|---------------|
| 400 | 11 | 4400 PCS | -- KG | --KG |
| PCS/ REEL | REELS/ CARTON | QUANTITY | GROSS WEIGHT | NET WEIGHT |

| | | | | | | | | | | | | | | | |
|---------|----------|------------------|---------|----------|------------------------|--------------|----------|-----|---|--|-------------|--|-------------------------|-------|---------|
| | | | | | 一般公差 GENERAL TOLERANCE | | 绘图 DR. | 王正顺 | 料号 PART NO. | | 文件编号 NUMBER | | TERMINAL&CONNECTORS | | |
| | | | | | X.X ±0.30 | X* ±5° | 校对 CHK. | 董东平 | N3A-FE154DR9A3-C0XX | | ENDPT01 | | | | |
| | | | | | X.XX ±0.20 | X.X* ±3° | 审核 CHK. | 董东平 | 品名 TITLE | | | | 比例 SCALE | SHEET | 版次 REV. |
| A0 | 21.07.26 | 新图面发行 | 董东平 | 杨章雄 | X.XXX ±0.10 | ▲ MAJOR DIM. | 核准 APPD. | 杨章雄 | USB3.2 AF RVS CH=-1.54 H2.52 L15.93 DIP Gen2 框口削弧形 | | | | 1:1 | 1/1 | A0 |
| 版次 REV. | 日期 DATE | 变更内容 DESCRIPTION | 审核 CHK. | 核准 APPD. | 单位 UNIT | | | | | | | | | | |