
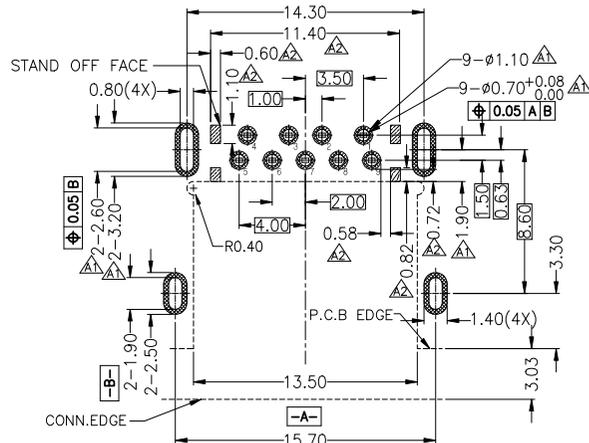





环保物料

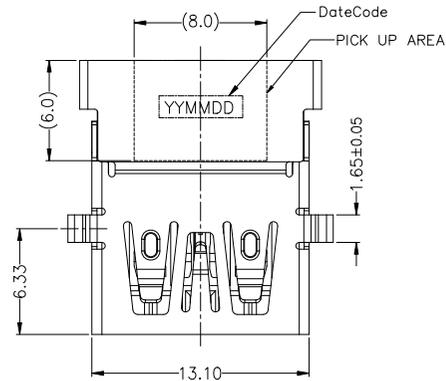

RECOMMENDED PCB LAYOUT (TOP VIEW)
GENERAL TOLERANCES:±0.05 (t=1.2)



NOTES:

- MATERIAL AND PLATING:
Housing: LCP+30%G.F,UL94V-0,Blue.
Contact(4Pin/5Pin): Phosphor Bronze,Au And Sn Plated.
Shell: Stainless Steel,Ni Plated.
- MECHANICAL CHARACTERISTIC
Mating Force: 35N(3.57Kgf) Max.
Unmating Force: 10N(1.02Kgf) Min.
Durability: 5,000 Cycles.
- ELECTRICAL CHARACTERISTIC
Current Rating: 1.8A(Pin1,4),
0.25A For Other Contacts.
Voltage Rating: 30V AC Max.
Contact Resistance: 30m Ohm Max.
Insulation Resistance: 100M Ohm Min.
Dielectric Withstanding Voltage: 100V AC.
- TEMPERATURE
Openrating Temperature: -40°C~+85°C
Storage Temperature: -60°C~+105°C
- DATECODE INFORMATION:
YYMMDD (Y:YEAR M:MONTH D:DATE)
- ORDER INFORMATION:

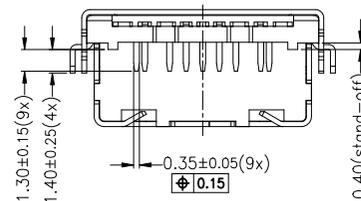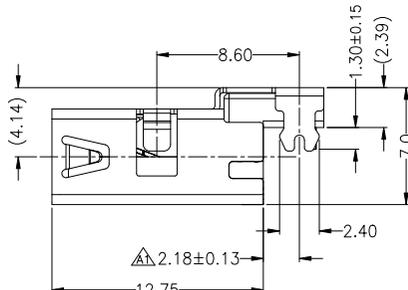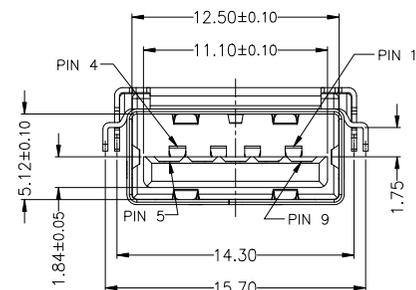

N3A-F E175 D R L B 3-00 xx
1 2 3 4 5 6 7 8 9 10

- N3A:USB 3.0 A TYPE
- F:FEMALE
- E175=反向中心高-1.75mm
- D:DIP
- R:90°
- L:LCP
- COLOR B:蓝色
- 3:直脚
- TYPE码: 00:普通规格
- Contact Area plating on contacts
01: G/F 10: Au 10u"

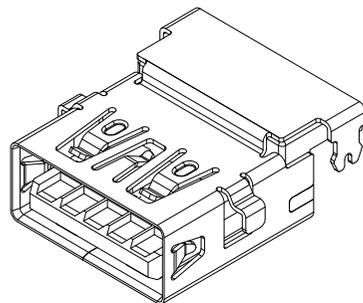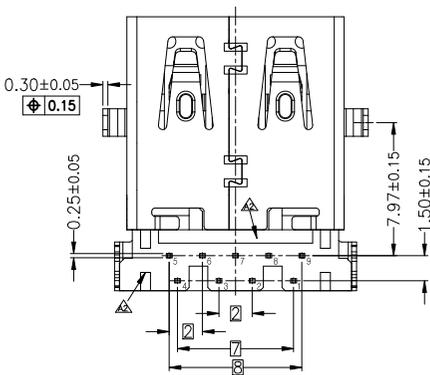

| Contact Number | Signal Name |
|----------------|-------------|
| PIN1 | VBUS |
| PIN2 | D- |
| PIN3 | D+ |
| PIN4 | GND |
| PIN5 | StdA_SSRX- |
| PIN6 | StdA_SSRX+ |
| PIN7 | GND_DRAIN |
| PIN8 | StdA_SSTX- |
| PIN9 | StdA_SSTX+ |
| Shell | Shield |

| 料号对照表 | 新料号 | 旧料号 |
|-------|---------------------|-----------------|
| | N3A-FE175DRLB3-0001 | W-18-USB3-CH175 |

| REV. | REVISION RECORD | DATE | GENERAL TOLERANCES | SCALE | NAME | DATE | PART NO. |
|------|-----------------|----------|--------------------|----------|------|----------|--|
| A0 | 新图面发行 | 22.03.17 | LINEAR | 1:1 | | | N3A-FE175DRLB3-00xx |
| A1 | 更换图框发行 | 22.08.05 | ANGLES | APPROVED | | | |
| | | | 0.0±0.25 | DESIGNER | | | |
| | | | 0.00±0.15 | DRAWN | 程功银 | 22.08.05 | TITLE USB3.0 AF R/A DIP RVS Type PRODUCT CH=1.75mm |
| | | | 0.00±0.10 | | | | |

DWG NO. ENDE05

JCTC®
TERMINAL&CONNECTORS

| REV | A1 | SHEET | 1/1 |
|-----|----|-------|-----|
|-----|----|-------|-----|

环保物料


PACKAGING INSTRUCTION I:

1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON
ALL CARTONS CLOSURES MUST BE DONE WITH TAPE.
2. FILL PACKAGING REEL WITH THE QUANTITIES AS INDICATED
IN THE CHART.


| PRODUCT P/N | PARTS PER SHIPPING CARTON | PARTS PER REEL (S.P.Q.) | TOTAL REELS PER PRIMARY CARTON |
|----------------------|---------------------------|-------------------------|--------------------------------|
| N3A-FE1375DRLB3-00xx | 2450 (PCS) | 350 (PCS) | 7 |

1. QUANTITY: 350 PCS

2. COVER TAPE PEELING FORCE:

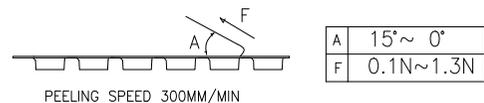

3. PART DIMENSIONS MEET EIA-481-D REQUIREMENT

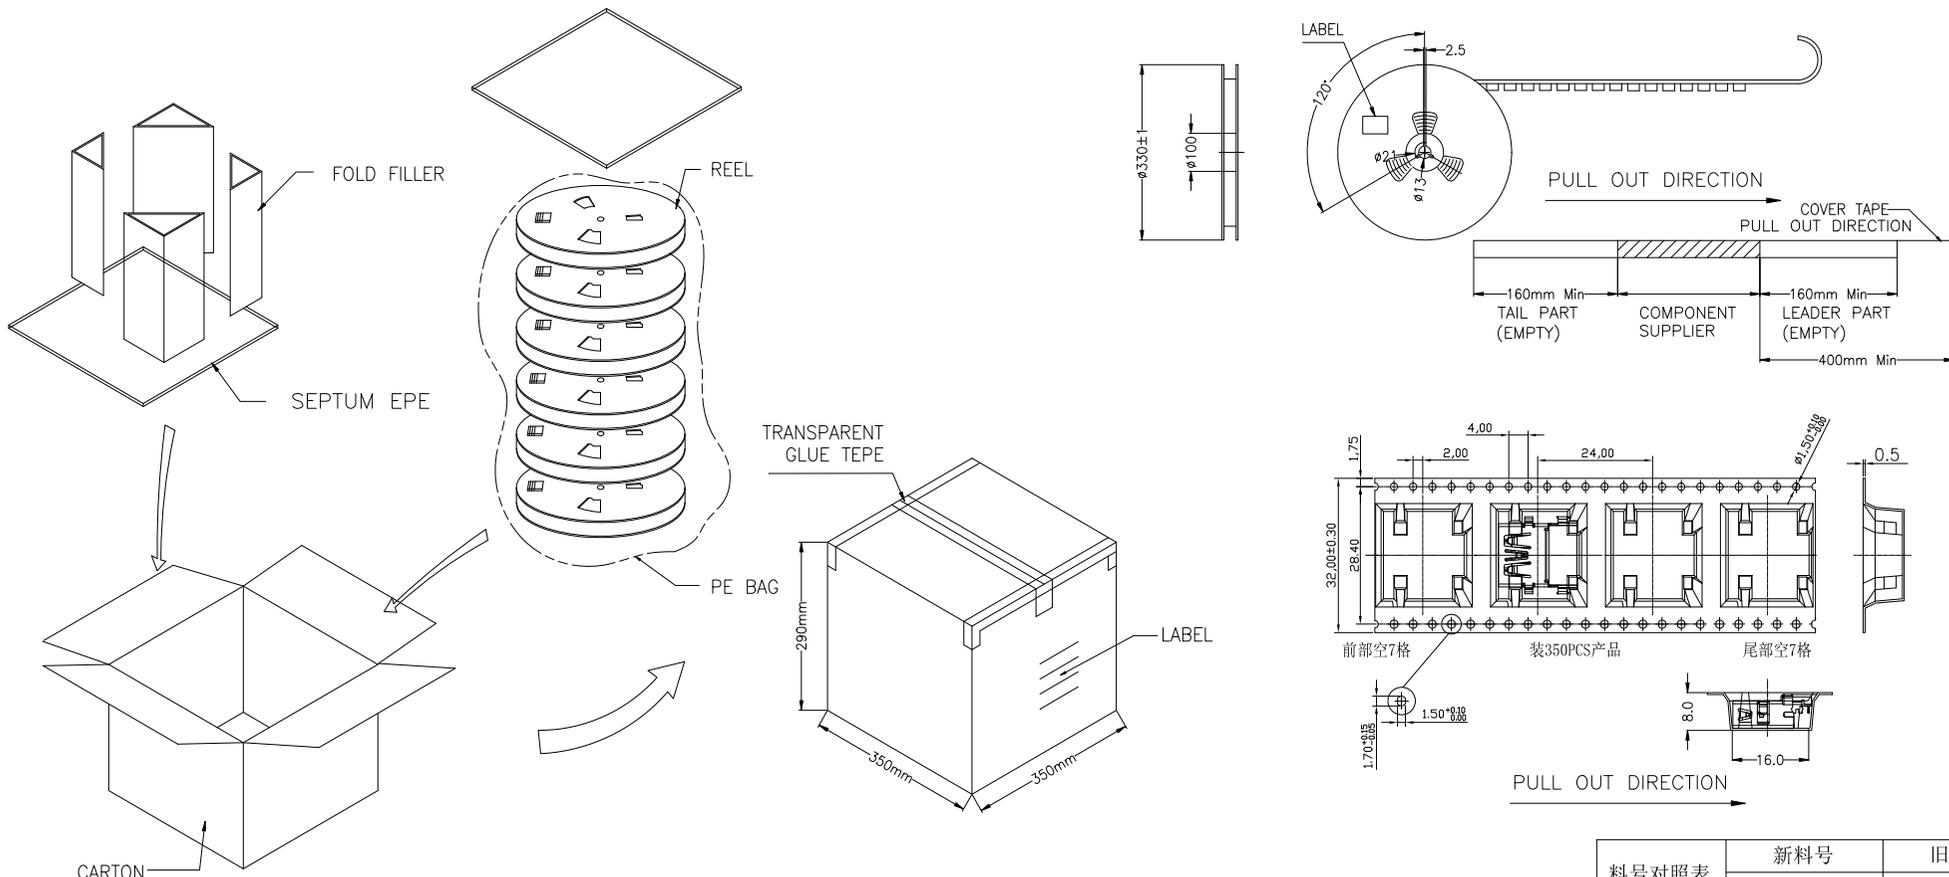

| REV. | REVISION RECORD | DATE | | GENERAL TOLERANCES | | SCALE 1:1 | NAME | DATE | PART NO. | DWG NO. | 料号对照表 | | |
|------|-----------------|----------|----------|--------------------|-----------|-----------|------|----------|--|-------------------------|-------|-----|-----|
| A0 | 新图面发行 | 22.03.17 | | LINEAR | ANGLES | APPROVED | | | N3A-FE1375DRLB3-00xx | ENDE05 | 新料号 | 旧料号 | |
| A1 | 更换图框发行 | 22.08.05 | UNIT: MM | 0.00±0.15 | X° ±3° | DESIGNER | | | TITLE USB3.0 AF R/A DIP RVS Type PRODUCT CH=1.75mm | TERMINAL&CONNECTORS | | | |
| | | | SIZE: A4 | 0.000±0.10 | X° X' ±2° | DRAWN | 程功银 | 22.08.05 | | | | | REV |

