
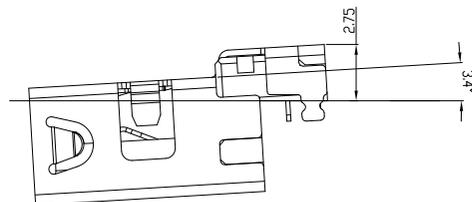
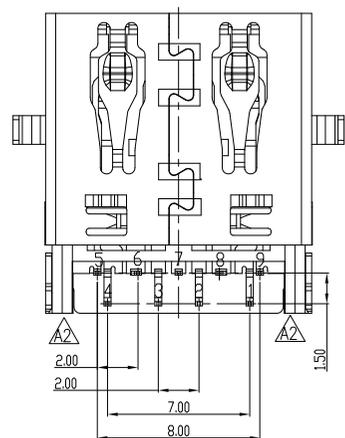

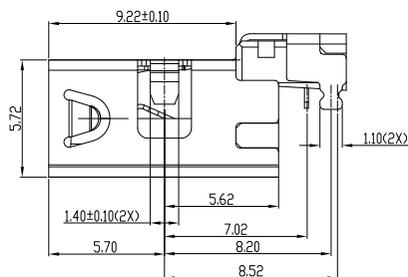
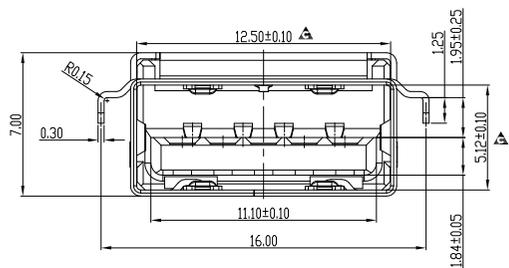


环保物料

HF

DATE CODE $\triangle A3$

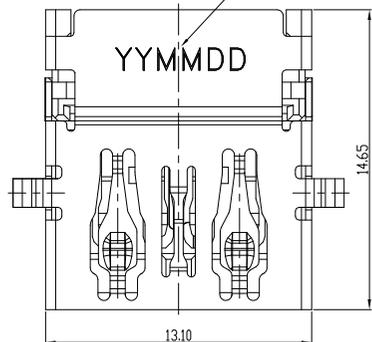

NOTE:

- MATERIAL:
 - INSULATOR:LCP,UL 94 V-0; COLOR BLACK
 - CONTACT:BRASS C2680
 - SHELL:SUS304
- PLATING:
 - CONTACTS: AU 15u" PLATED ON FUNCTIONAL AREA OF CONTACT, 50u" MIN. MATTE-TIN ON SOLDER TALLS, 50u" MIN. NICKEL UNDERPLATING OVER ALL
 - SHIELD: BLACK Ni 30u" MIN ON SOLDER TALLS
- ELECTRICAL CHARACTERISTICS:
 - INSULATION RESISTANCE: 100MQ MIN.
 - DIELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR 1 MINUTE.
 - CURRENT RATING: 1.8A(PIN1, 4); OTHER CONTACTS 0.25A
- MECHANICAL CHARACTERISTICS:
 - MATING FORCE: 3.5kgf MAX.
 - UNMATING FORCE:0.7kgf-2.0kgf AFTER DURABILITY.
 - DURABILITY: 5000 CYCLES.
- IR REFLOW : THE PEAK TEMPERATURE ON THE BOARD
- RESISTANCE TO REFLOW SOLDERING HEAT: 260°+0/-5°,10s.
- \triangle MARK IS CPK DIM .
- PART NUMBER:






N3A-F E195 D R L A 3-00 15
1 2 3 4 5 6 7 8 9 10

- N3A:USB 3.0 A TYPE
- F:FEMALE
- E195=反向中心高-1.95mm
- D:DIP
- R:90°
- L:LCP
- COLOR A:黑色
- 3:直角
- TYPE码: 00:普通规格
- Contact Area plating on contacts
- Au 15u"

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.		TERMINAL&CONNECTORS					
A0	新图面发行	22.05.21		LINEAR	ANGLES	1:1							APPROVED	Frey Yang	22.07.26	N3A-FE195DRLA3-0015	ENDE05
A1	高频分析后结构调整	22.06.13	UNIT: MM	0.0±0.30	X° REF±2°	DESIGNER	Daniel Dong	22.07.26	TITLE	USB3.1 AF RVS CH=-1.95 H6.92 L14.65DIP Gen2 10G			REV	A3	SHEET	1/3	
A2	调整塑胶Standoff面尺寸 $\triangle A2$	22.06.16		0.00±0.20	X° ±1°												DRAWN
A3	增加喷码区域标识 $\triangle A3$	22.07.26		0.000±0.10													

环保物料

HF

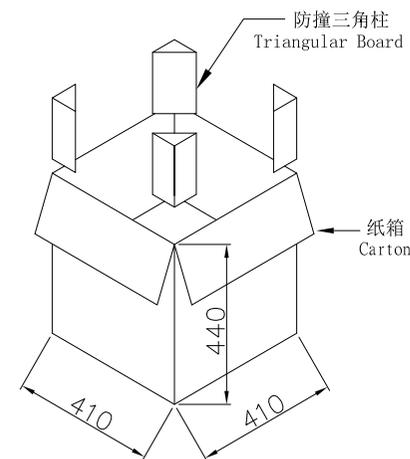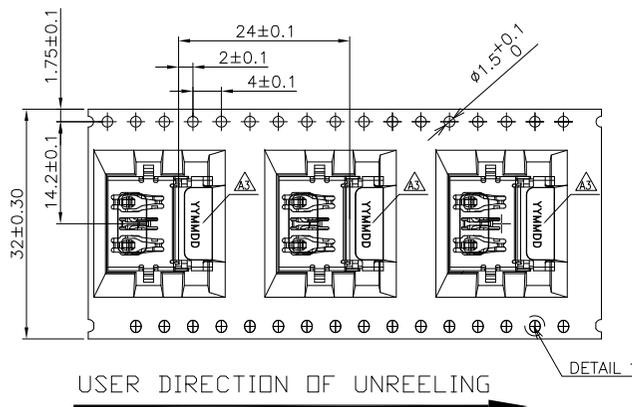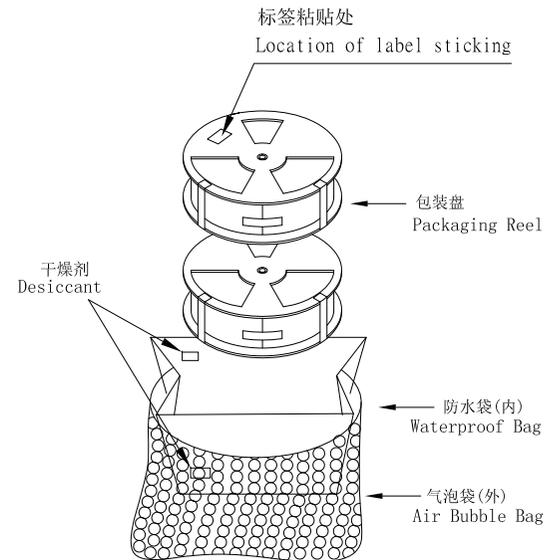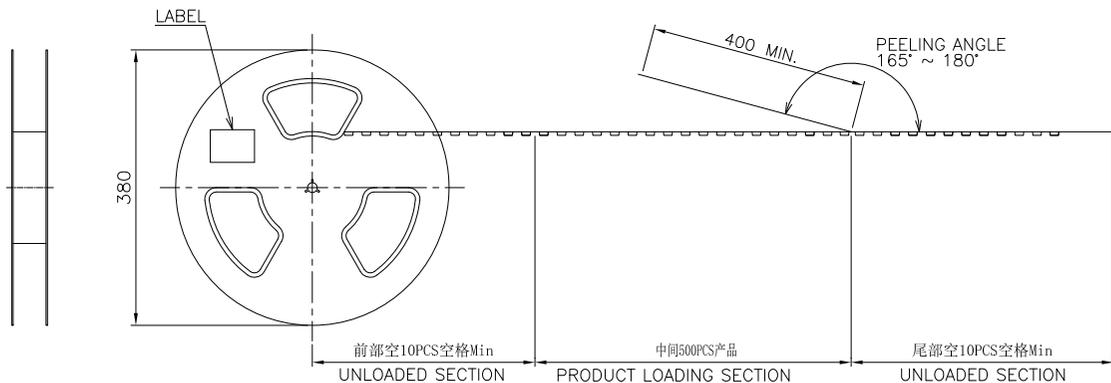

NOTE:

1. MATERIAL:

BOX: FIBRE BOARD, CORRUGATED, DOUBLE WALL (K=K).

TAPE: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 120°C, TRANSPARENT COLOR. (透明色)

REEL: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 70°C, BLUE COLOR.

BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C.

2. PEELING STRENGTH: 0.1~1.3N (10~130gf)

3. PEELING SPEED: 300 mm/min.

4. EACH BAG SHALL BE INCLUDED DESICCANT.

500	11	5500 PCS	-- KG	--KG
PCS/ REEL	REELS/ CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS					
A0	新图面发行	22.05.21	LINEAR	ANGLES	1:1										
A1	高频分析后结构调整	22.06.13	UNIT: MM	X° REF ± 2°	APPROVED	Frey Yang	22.07.26	N3A-FE195DRLA3-0015	ENDE05	TITLE	USB3.1 AF RVS CH=-1.95 H6.92 L14.65DIP Gen2 10G	REV	A3	SHEET	3/3
A2	调整塑胶Standoff面尺寸	22.06.16				0.00±0.20	X° ± 1°								
A3	增加喷码区域标识	22.07.26	0.000±0.10		DRAWN	WZS	22.07.26								

1

2

3

4

5

6

7

8