

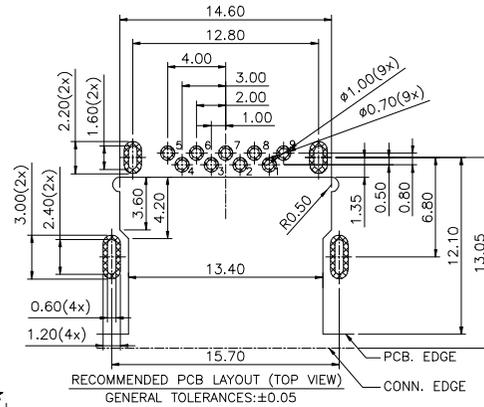

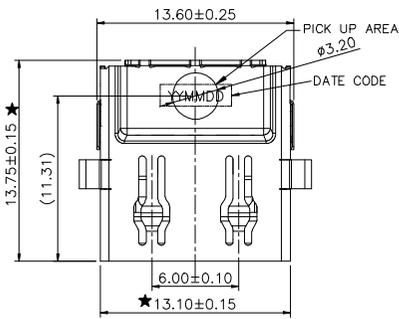


环保物料 HF



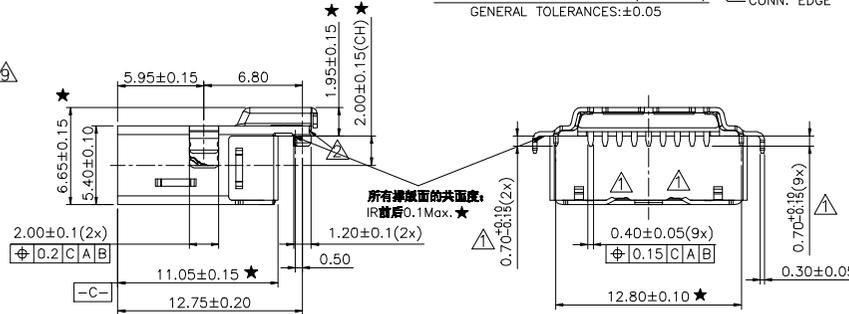


- NOTES:
- MECHANICAL CHARACTERISTIC
 - Mating Force: 6~20N.
Unmating Force: Initial:8~20N
After:6~20N(New Plug)
 - Contact retention: 5N/pin min after IR
 - ELECTRICAL CHARACTERISTIC
 - Rating Voltage:30V AC.
 - Current Rating:1.8A(For VBUS And GND Pin)
Other Contacts 0.25A
 - Contact Resistance: 30m Ohm Max,after Δ 10m Ohm
 - Insulation Resistance: 1000M Ohm Min
 - Dielectric Withstanding Voltage: 500V AC Min
 - Meet Gen2.
 - TEMPERATURE
 - Operating Temperature: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$
 - Salt Spray: 48Hours.
 - Burr: 0.05mm Max.
 - Tape and reel packing satisfy EIA-364-481-D standard.
 - Dimension marked Δ should 100% CCD inspecte
Dimension marked Δ should CPK>1.33
Dimension marked \star should SIP inspecte by QC and IQC
 - ORDER INFORMATION:

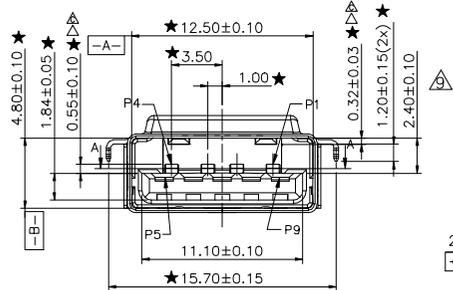

N3A-F E200 D R 9 A 3-C1 01
1 2 3 4 5 6 7 8 9 10

- N3A:USB 3.0 A TYPE
- F:FEMALE
- E200=反向翘板-2.00mm
- D:DIP
- R:90°
- PA9T
- COLOR A:黑色
- 直角
- TYPE码: C1:L=13.75mm规格阵列连接结构
- Contact Area plating on contacts
01: Au 1u"

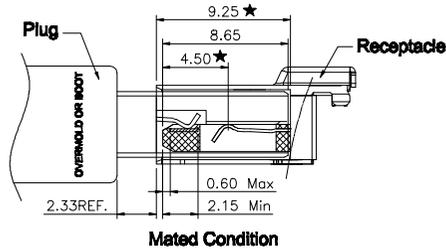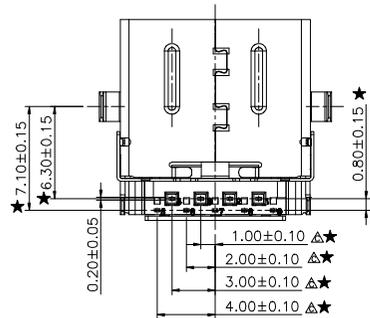

CONNECTOR BOM:

ITEM	PART NAME	QTY	MATERIA	FINISH/PLATING
5	HOUSING	1	PA9T	BLACK,UL94 V-0
4	COVER	1	SUS201-H,T=0.20	NO PLATED
3	SHELL	1	SUS201-H,T=0.30	NI 50u*MIN PLATED OVER ALL
2	4P CONTACT	4	C5191-H,T=0.20	CONTACT AREA 1u*MIN,SOLDER AREA PLATING 80u*MIN MATE TIN,UNDER PLATING 50u*MIN NICKEL.
1	5P CONTACT	5	C2680-H,T=0.20	

Contact Number	Signal Name
PIN1	VBUS
PIN2	D-
PIN3	D+
PIN4	GND
PIN5	Std_A_SSRX-
PIN6	Std_A_SSRX+
PIN7	GND_DRAIN
PIN8	Std_A_SSTX-
PIN9	Std_A_SSTX+
Shell	Shield

REV.	REVISION RECORD	DATE	SCALE	NAME	DATE	PART NO.	DWG NO.	
A0	新图面发行	21.08.05	1:1			N3A-FE200DR9A3-C101	ENDE05	
A1	更新材质描述及尺寸公差	21.09.29	APPROVED			TITLE USB3.1 GEN2 AF R/A DIP RVS TYPE CH=-2.0mm(长体)	REV	
A2	按客户标准更新图纸	23.09.06	DESIGNER					A2
			DRAWN	Micky Ma	23.09.06			SHEET


JCTC®

环保物料


PACKAGING INSTRUCTION:

1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON
ALL CARTONS CLOSURES MUST BE DONE WITH TAPE.
2. FILL PACKAGING REEL WITH THE QUANTITIES AS INDICATED
IN THE CHART.



PRODUCT P/N	PARTS PER SHIPPING CARTON	PARTS PER REEL (S.P.Q.)	TOTAL REELS PER PRIMARY CARTON
SSB-A09F-XXT-UNXX	3500 (PCS)	350 (PCS)	10

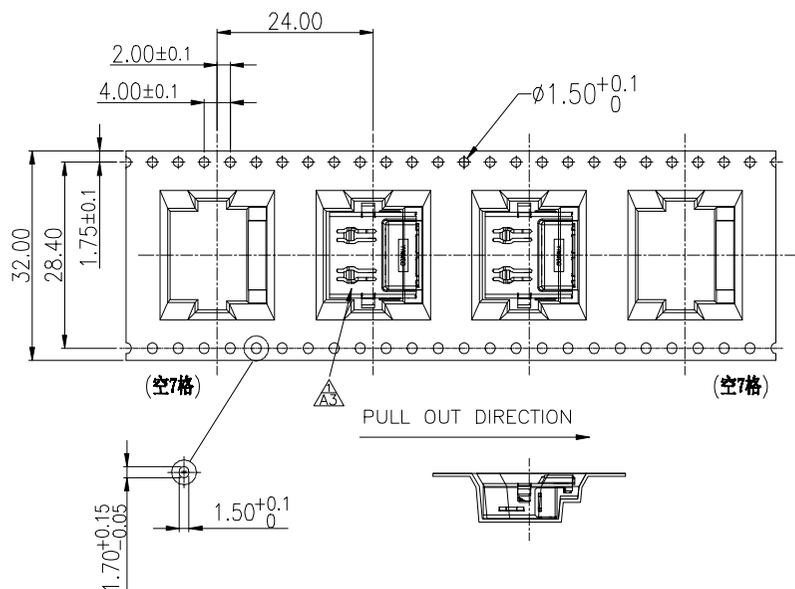

1. QUANTITY: 350 PCS
2. COVER TAPE PEELING FORCE:



3. PART DIMENSIONS MEET EIA-481-D REQUIREMENT

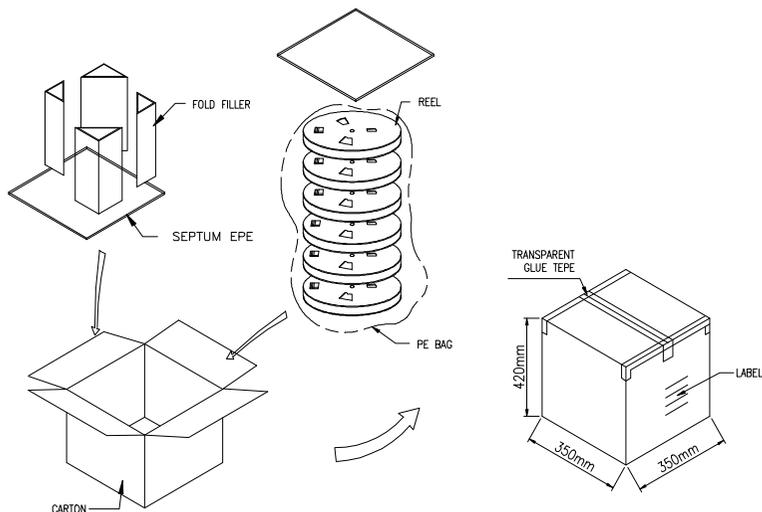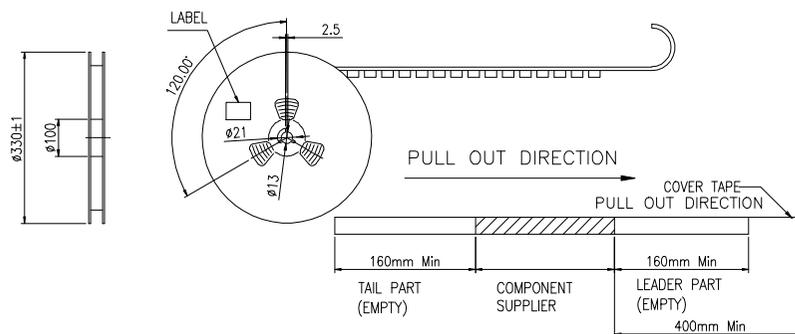

版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.
A0	21.08.05	新图面发行	董东平	杨章雄

一般公差 GENERAL TOLERANCE

X.X	±0.30	X'	±2'
X.XX	±0.20	X.X'	±1'
X.XXX	±0.10	▲	MAJOR DIM.

单位 UNIT	mm
---------	----

绘图 DR.	马仟
校对 CHK.	马仟
审核 CHK.	董东平
核准 APPD.	杨章雄

料号 PART NO.	N3A-FE200DR9A3-C1XX
品名 TITLE	USB3.1 GEN2 AF R/A DIP RVS TYPE CH=-2.0mm

文件编号 NUMBER	ENDPT01
-------------	---------

JCTC ® TERMINAL & CONNECTORS		
比例 SCALE	SHEET	版次 REV.
1/1	1/1	A0