

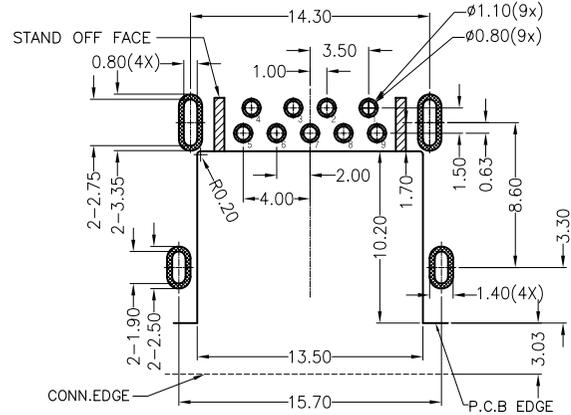
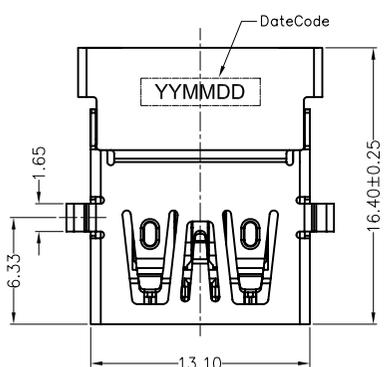
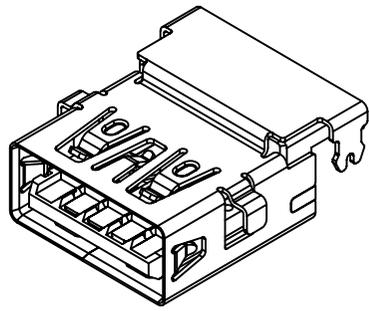
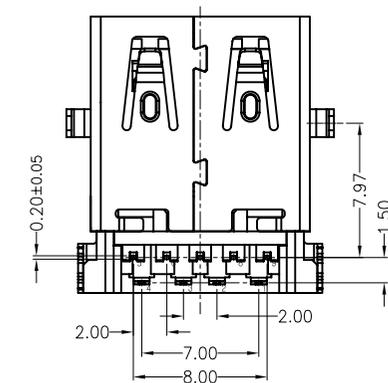
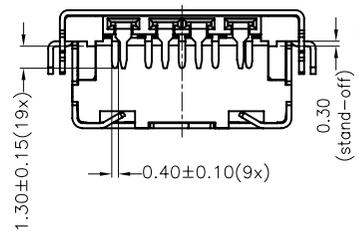


环保物料

检验规范

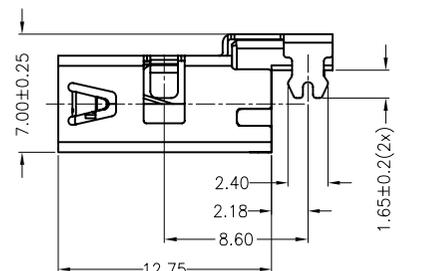

RECOMMENDED PCB LAYOUT (TOP VIEW)
GENERAL TOLERANCES: ±0.05 (t=1.2)

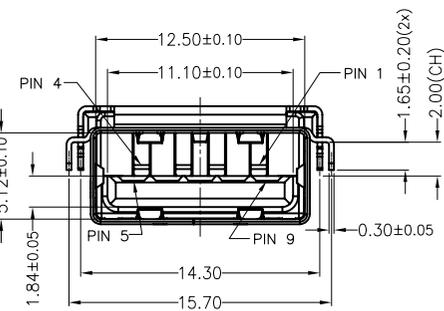

N3A-F E200 D R L A 3-00 XX
1 2 3 4 5 6 7 8 9 10

- 1,N3A=USB 3.0 A TYPE N3B=USB 3.0 B TYPE, N2A=USB 2.0 A TYPE N2B=USB 2.0 B TYPE,
- 2,F=FEMALE M=MALE
- 3,E200=反向中心高-2.00
- 4,D=DIP S=SMT
- 5,R=90° V=180°
- 6,L=LCP
- 7,A=黑色 W=白色 B=蓝色
- 8,1=青蛙脚 2=鱼叉脚 3=直角
- 9,TYPE码:00=普通规格 AO=不带翻边 01=斜口规格
- 10,CONTACT AREA PLATING ON CONTACTS
- 01=G/F 03=Au 3u"
- 05=Au 5u" 10=Au 10u"
- 15=Au 15u" 30=Au 30u"

- NOTES:
- MATERIAL AND PLATING:
Housing: LCP+30%G.F,UL94V-0,Black
Contact(4Pin): Phosphor Bronze,Au And Sn Plated.
Contact(5Pin): Brass,Au And Sn Plated.
Shell: Stainless Steel,Ni Plated.
 - MECHANICAL CHARACTERISTIC
Mating Force: 25N Max.
Unmating Force: 7N-25N Min(Initial)
7N-25N Min(After)
Durability: 5,000 Cycles.
 - ELECTRICAL CHARACTERISTIC
Current Rating: 1.8A(Pin1,4),
0.25A For Other Contacts.
Voltage Rating: 30V AC Max.
Contact Resistance: 30m Ohm Max.
Insulation Resistance: 100M Ohm Min.
Dielectric Withstanding Voltage: 100V AC.
 - TEMPERATURE
Openrating Temperature: -40iãC~+85iãC
Storage Temperature: -60iãC~+105iãC
 - DATECODE INFORMATION:
YYMMDD (Y:YEAR M:MONTH D:DATE)
 - ORDER INFORMATION:

| Contact Number | Signal Name |
|----------------|-------------|
| PIN1 | VBUS |
| PIN2 | D- |
| PIN3 | D+ |
| PIN4 | GND |
| PIN5 | StdA_SSRX- |
| PIN6 | StdA_SSRX+ |
| PIN7 | GND_DRAIN |
| PIN8 | StdA_SSTX- |
| PIN9 | StdA_SSTX+ |
| Shell | Shield |

| | | | | | | | | | |
|---------|---------|------------------|---------|----------|--|------------------------------------|---|---------------------|-------------|
| A0 | | 21.01.27 | 新图面发行 | 李兴泽 | 一般公差 GENERAL TOLERANCE | 绘图 DR. | 李兴泽 | 料号 PART NO. | 文件编号 NUMBER |
| 版次 REV. | 日期 DATE | 变更内容 DESCRIPTION | 审核 CHK. | 核准 APPD. | X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 | X' ±2' X.X' ±1' ▲ MAJOR DIM. | 校对 CHK. | N3A-FE200DRLA3-00XX | ENDPT01 |
| | | | | | 单位 UNIT | 审核 CHK. | 品名 TITLE | | |
| | | | | | mm | 核准 APPD. | USB3.1 GEN2 A/FDIP RVS PRODUCT CH=-2.0mm | | |

| | | |
|----------|-------|---------|
| 比例 SCALE | SHEET | 版次 REV. |
| 1/1 | 1/1 | A0 |



