


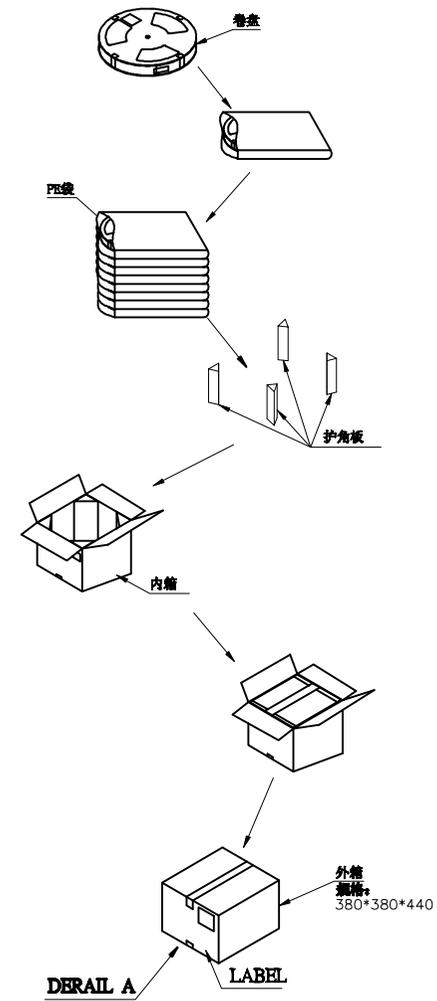


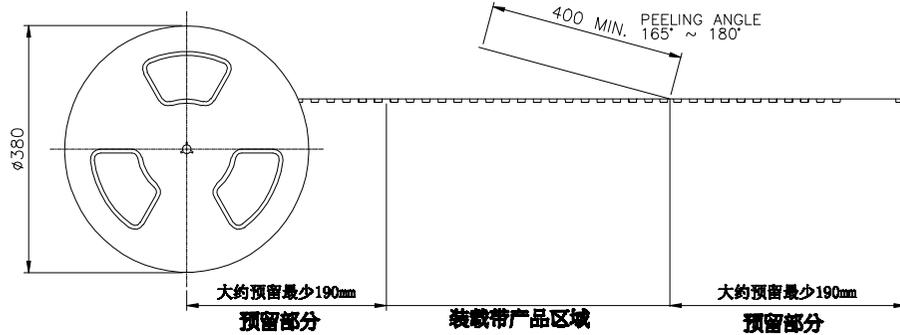

RoHS  
HF



USER DIRECTION OF UNREELING

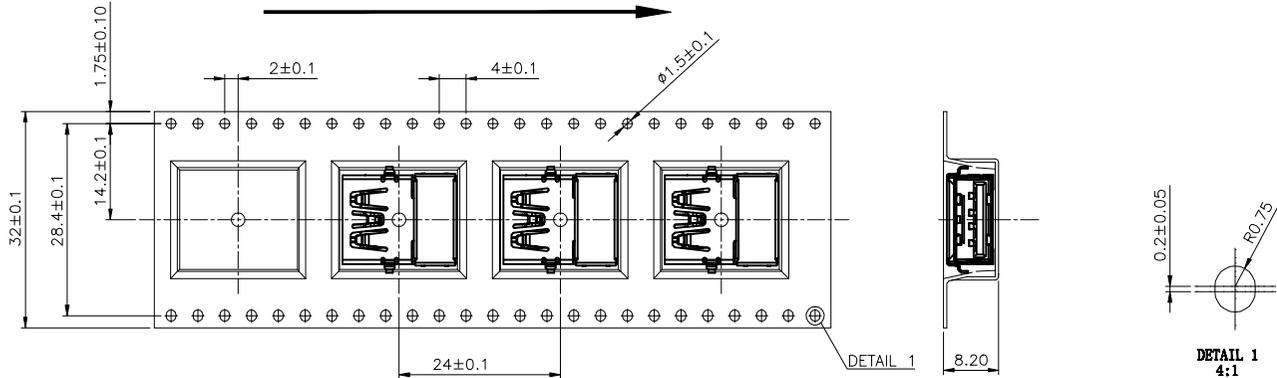

- NOTE:
- MATERIAL:  
BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL.  
TAPE: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 120°C, TRANSPARENT COLOR.  
REEL: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 70°C, BLUE COLOR.  
BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C.
  - PEELING STRENGTH: 0.1 ~ 1.3 N (10 ~ 130 GRAMS)
  - PEELING SPEED: 300 mm/min.
  - EACH BAG SHALL BE INCLUDED DESICCANT.

400	11	4400 PCS	KG	KG
PCS/REEL	REELS/CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.				
A0	新图面发行	23.05.25	LINEAR	ANGLES	1:1	Frey Yang	23.09.01	N3A-FE205DRLx3-0101	ENDE05				
A1	换图框发行	23.09.01	0.0±0.30	X° REF±6°	APPROVED	Daniel Dong	23.09.01	TITLE					
			0.00±0.20	X° ±3°	DESIGNER	Micky Ma	23.09.01	USB3.0 AF RVS S-2.05mm L16.9mm					
			UNIT: MM	0.00±0.10	X° X' ±2°	DRAWN				REV	A1	SHEET	2/2