
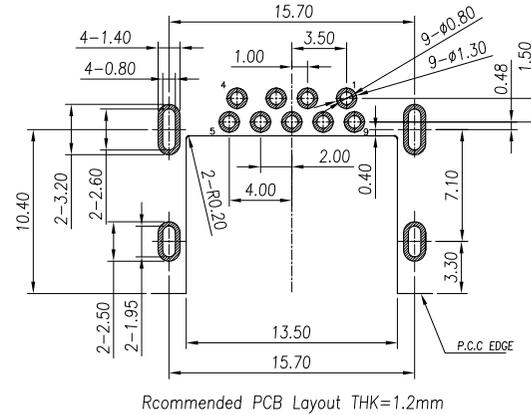









环保物料

HF

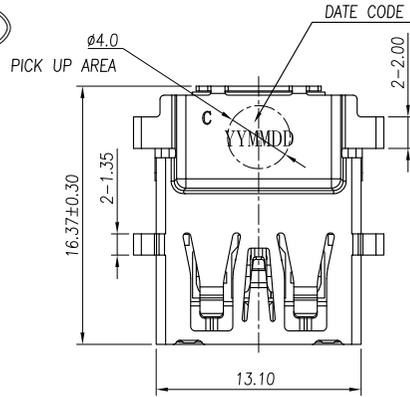

NOTE:

1. MATERIAL:
- 1.1 INSULATOR: PA9T
- 1.2 CONTACT: 4P C5191 T=0.20mm
- 1.3 CONTACT: 5P C5191 T=0.20mm
- 1.4 SHELL:SUS 304
2. ELECTRICAL CHARACTERISTICS:
- 2.1 CONTACTRESISTANCE:30mΩ MAX
- 2.2 CONTACT CURRENT RATING:1.5A
- 2.3 DIELECTRIC WITHSTANDING VOLTAGE:100 V R. M. S.
- 2.4 INSULATION RESISTANCE 100 MΩ MIN
- 2.5 OPERATING TEMPERATURE:-40° C ~ 85° C
3. MECHANICAL CHARACTERISTICS:
- 3.1 MATING FORCE:30 N MAX.
- 3.2 REMOVAL FORCE: 10N ~20N; 8N Min AFTER TES
- 3.3 DURABILITY:MANDATORY:5,000 CYCLES
- 3.4. SALT SPRAY 48HR PASS.
5. INSERTION FORCE OF CONN INTO PCB 2kgf MAX.
6. PLATING
- 6.1 TERMINAL:
- 80u" MIN NICKEL ALL OVER
- 100u"MIN Tin ON SOLDER AREA
- (1~30)u"Au ON CONTACT AREA
- 6.2 SHELL:50u"MIN. NICEL ALL OVER
7. ▲ MARK IS CPK DIM .

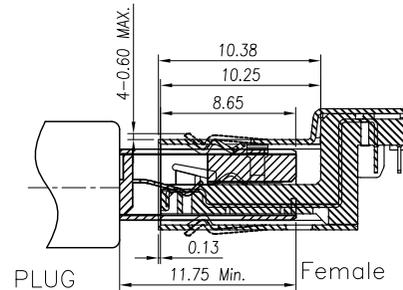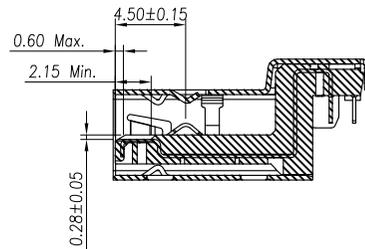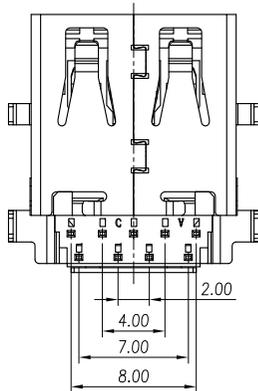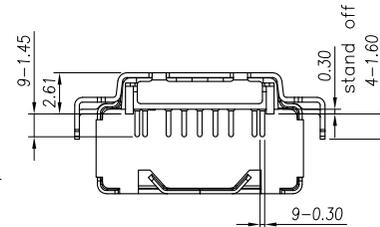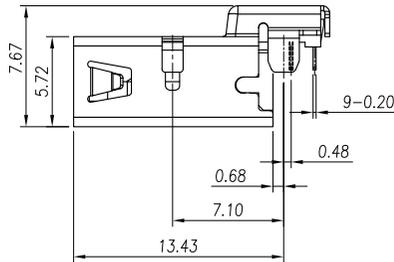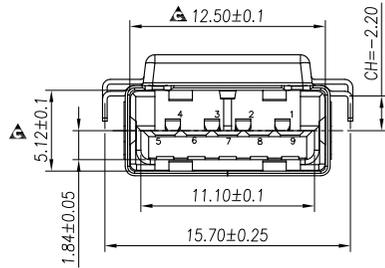

N3A-F E220 D R 9 A 3-AO 01
1 2 3 4 5 6 7 8 9 10

- 1.N3A:U3 A TYPE
- 2.F:FEMALE
- 3.E220=反向中心高-2.20mm
- 4.D:DIP
- 5.R:90°
- 6.9:PA9T
- 7.COLOR A:黑色
- 8.3:直角
- 9.TYPE码: AO:不带翻边
- 10.Contact Area plating on contacts
- 01: G/F


Pin #	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE	NAME	DATE	PART NO.	DWG NO.
A0	新图面发行	22.04.07	LINEAR	1:1	Frey Yang	22.04.07	N3A-FE220DR9A3-A001	ENDE05
			0.0±0.30	APPROVED	Daniel Dong	22.04.07	TITLE USB3.1 AF RVS CH=-2.20 H2.61 L16.37 DIP Gen2(10Gbps)	
			0.00±0.25	DESIGNER	WZS	22.04.07		
			0.000±0.10	DRAWN				
			UNIT: MM					
			SIZE: A4					




环保物料




HF

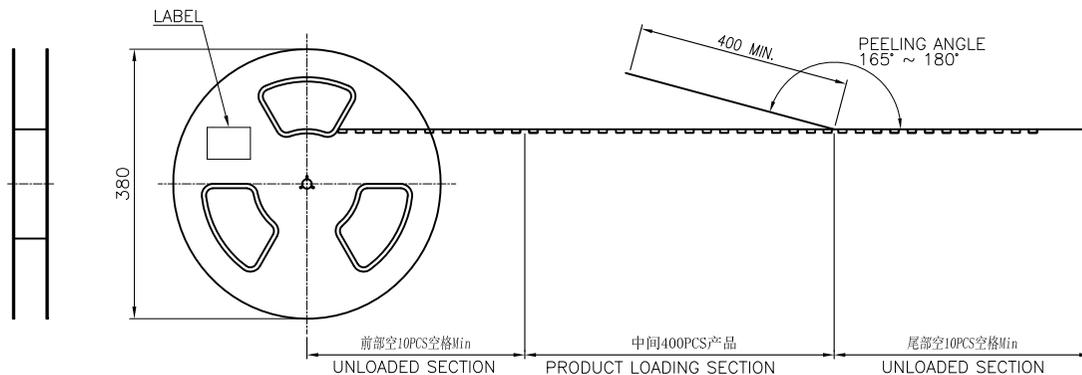

USER DIRECTION OF UNREELING

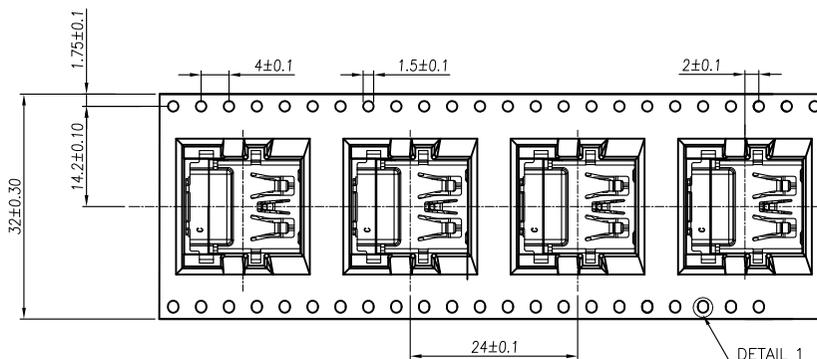

USER DIRECTION OF UNREELING

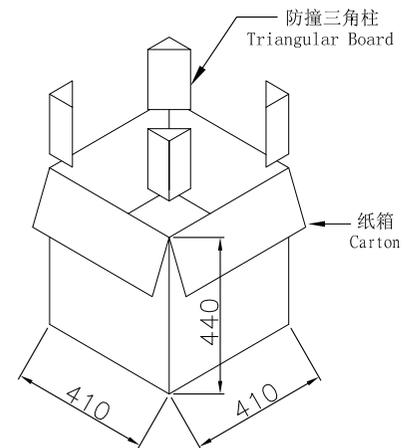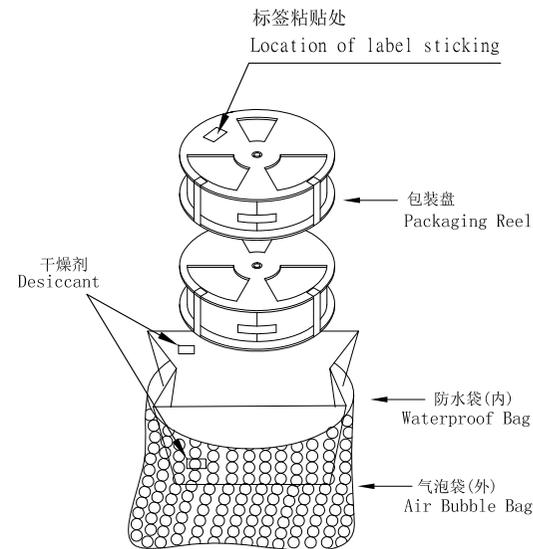

NOTE:

- MATERIAL:
BOX: FIBRE BOARD, CORRUGATED, DOUBLE WALL.
TAPE: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 120°C, Transparent COLOR (透明色).
REEL: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 70°C, BLUE COLOR.
BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C.
- PEELING STRENGTH: 0.1 ~ 1.3 N (10 ~ 130 GRAMS)
- PEELING SPEED: 300 mm/min.
- EACH BAG SHALL BE INCLUDED DESICCANT.

400	11	4400 PCS	-- KG	--KG
PCS/ REEL	REELS/ CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
A0	新图面发行	22.04.07		LINEAR	ANGLES	1:1								
			SIZE: A4	0.00±0.25	X° ±3°	DESIGNER	Daniel Dong	22.04.07	TITLE USB3.1 AF RVS CH=-2.20 H2.61 L16.37 DIP Gen2(10Gbps)		REV	A0	SHEET	1/1
			0.00±0.10	X° X' ±2°	DRAWN	WZS	22.04.07							