
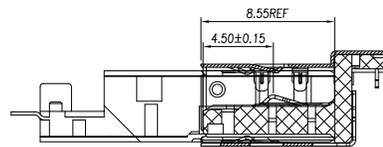
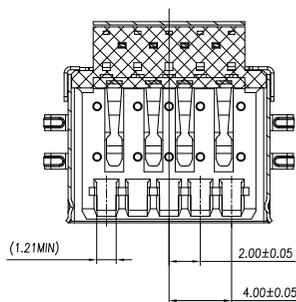
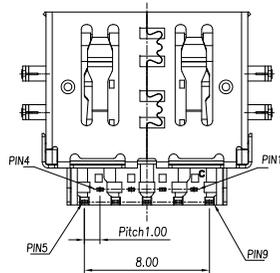
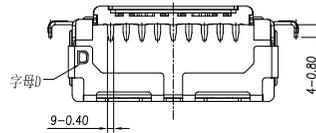
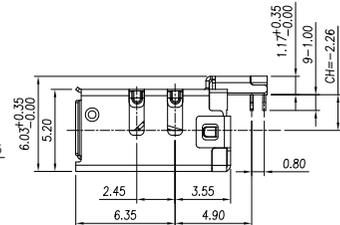
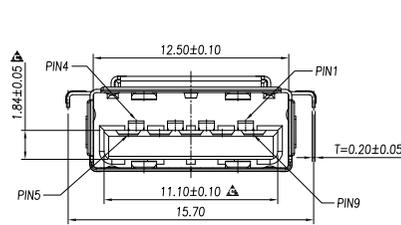
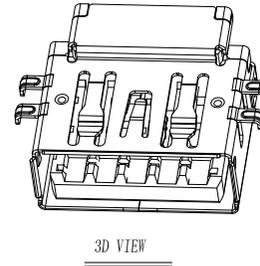
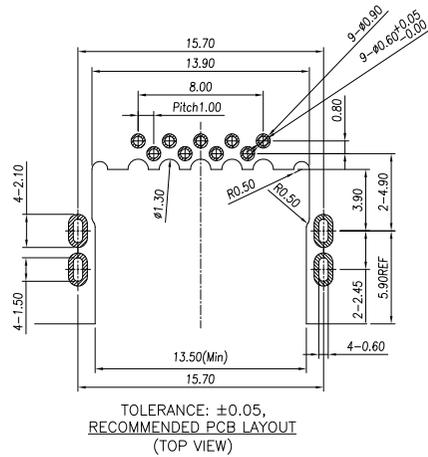


环保物料

HF

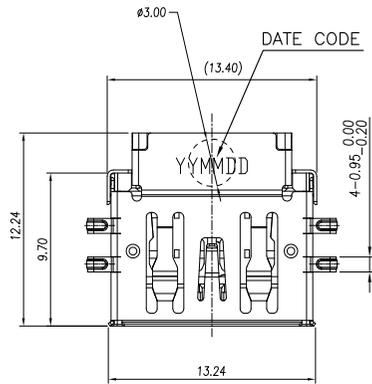

NOTE:

1. MATERIAL:

- 1.1 INSULATOR:PA9T, UL 94 V-0; COLOR BLACK
- 1.2 4PIN CONTACT:C5191(T=0.20mm)
- 1.3 5PIN CONTACT:C2680(T=0.20mm)
- 1.4 SHELL:SUS304(T=0.20mm)

2.PLATING:

- CONTACTS: GOLD(SEE TABLE)PLATED ON CONTACT AREA, 100u"MIN. MATTE-TIN ON SOLDERTALLS
- 50u" MIN. NICKEL UNDERPLATING OVER ALL
- SHIELD: 50u" MIN. NICKEL UNDERPLATING OVER ALL

3. SPECIFICATIONS:

3.1 ELECTRICAL CHARACTERISTICS:

- CURRENT RATING: 1.8A(PIN1, 4); OTHER CONTACTS 0.25A
- VOLTAGE RATING: 30V DC/AC MAX.
- CONTACT RESISTANCE: 30mΩ MAX. PIN1&PIN4 50mΩ MAX FOR OTHER CONTACTS.
- DIELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR 1 MINUTE.
- INSULATION RESISTANCE: 100MΩ MIN.

3.2 MECHANICAL CHARACTERISTICS:

- △ MATING FORCE: 2.0kgf MAX.
- △ UNMATING FORCE:0.7-2.5kgf. △ DURABILITY: 5000 CYCLES.

4. OPERATING TEMPERATURES: -20°C TO +85°C.

5. STORAGE TEMPERATURE RANGE: -45°C TO +60°C.

6. Black Ni:Salt Spray 8H

7. RESISTANCE TO REFLOW SOLDERING HEAT: 260°+0/-5°,10s.

8. △ MARK IS CPK DIM .

N3A-F E226 D R 9 A 3-0B 01  
1 2 3 4 5 6 7 8 9 10

1.N3A:U3 A TYPE

2.F:FEMALE

3.E226=反向中心高-2.26mm

4.D:DIP

5.R:90°

6.9:9T

7.COLOR A:黑色

8.外壳脚 3:直脚

9.TYPE码: 0B:BLACK NI

10.Contact Area plating on contacts





01: G/F

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	JCTC® TERMINAL&CONNECTORS			
A0	新图面发行	22.06.07	UNIT: MM	LINEAR	1:1	Frey Yang	23.01.09	N3A-FE226DR9A3-0B01	ENDE05				
A1	修改插拔力标准	22.06.20		0.0±0.30	ANGLES	APPROVED	Daniel Dong			23.01.09	TITLE USB3.1 AF RVS CH=-2.26 H1.17 L12.24 DIP Gen2(10Gbps)		
A2	修改插拔力标准	23.01.09	0.00±0.25	X° REF±6°	DESIGNER	Micky Ma	23.01.09	REV A2 SHEET 1/2					
			0.000±0.10	X° ±3°	DRAWN								
				X° X' ±2°									

# 环保物料

HF

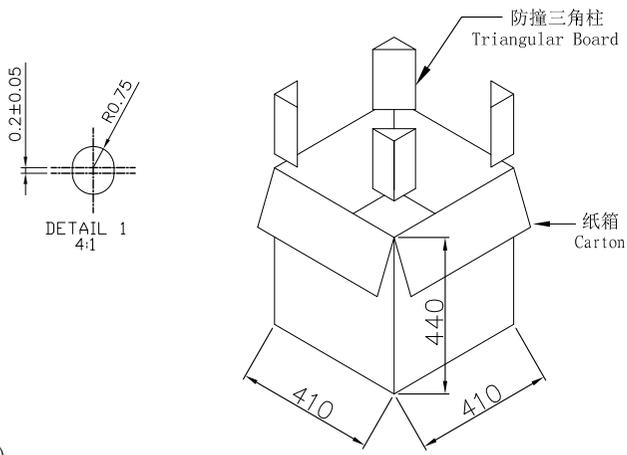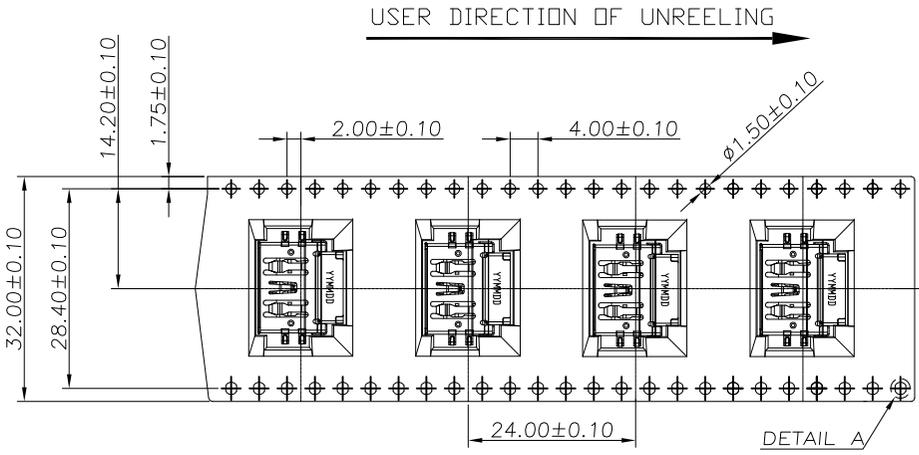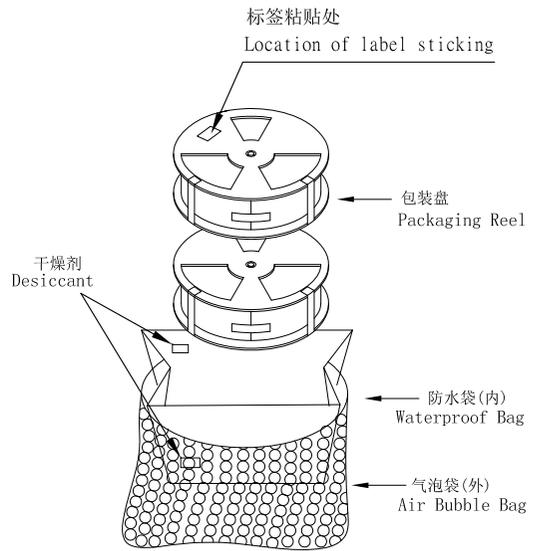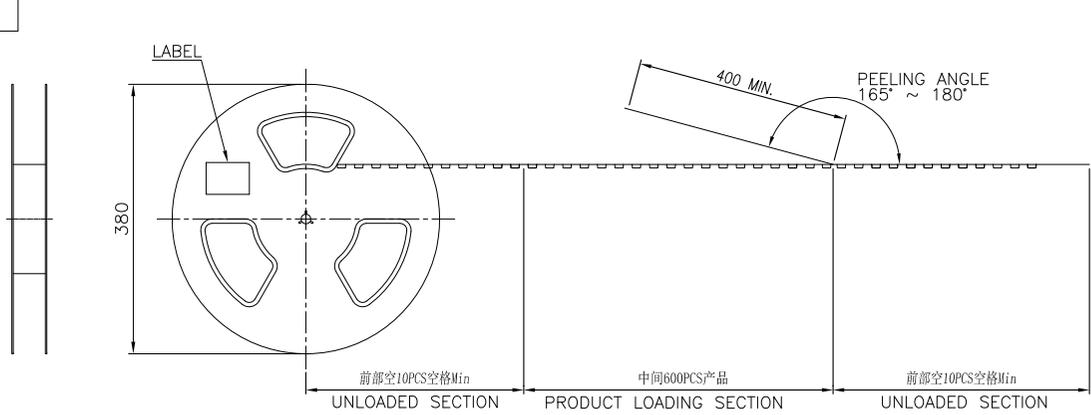

NOTE:

- MATERIAL:  
 BOX: FIBRE BOARD, CORRUGATED, DOUBLE WALL (K=K).  
 TAPE: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 120°C, TRANSPARENT COLOR. (透明色)  
 REEL: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 70°C, BLUE COLOR.  
 BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C.
- PEELING STRENGTH: 0.1~1.3N (10~130gf)
- PEELING SPEED: 300 mm/min.
- EACH BAG SHALL BE INCLUDED DESICCANT.

600	11	6600 PCS	-- KG	--KG
PCS/ REEL	REELS/ CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
A0	新图面发行	22.06.07	LINEAR	ANGLES	1:1	Frey Yang	23.01.09	N3A-FE226DR9A3-0B01	ENDE05				
A1	修改插拔力标准	22.06.20	0.0±0.30	X° REF±6°		Daniel Dong	23.01.09	TITLE		USB3.1 AF RVS CH=-2.26 H1.17 L12.24 DIP Gen2(10Gbps)			
A2	修改插拔力标准	23.01.09	0.00±0.25	X° ±3°		Micky Ma	23.01.09						
			UNIT: MM	0.00±0.10	X° X' ±2°					REV	A2	SHEET	2/2