

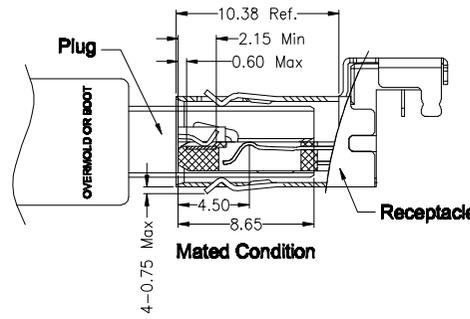
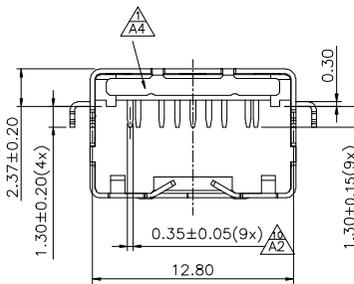
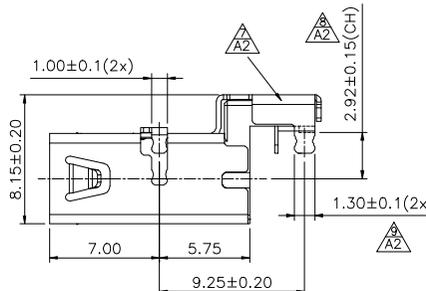
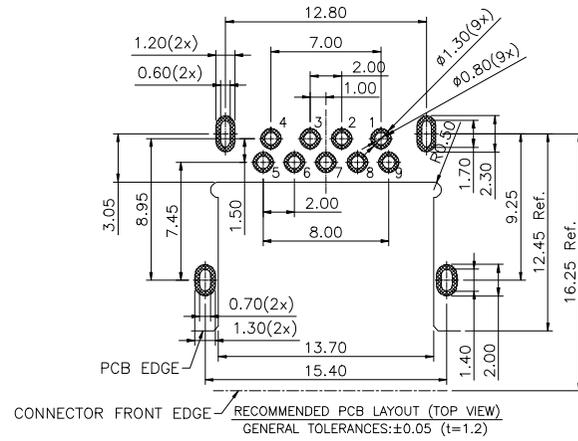
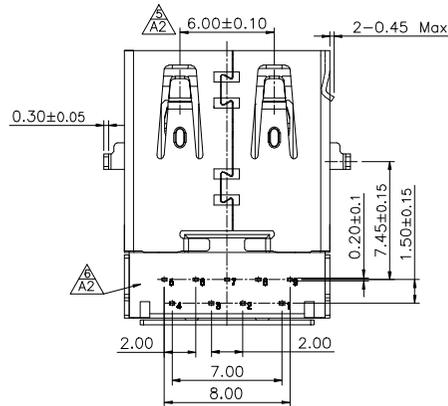
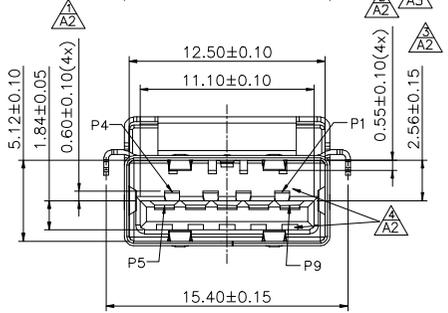


环保物料 HF

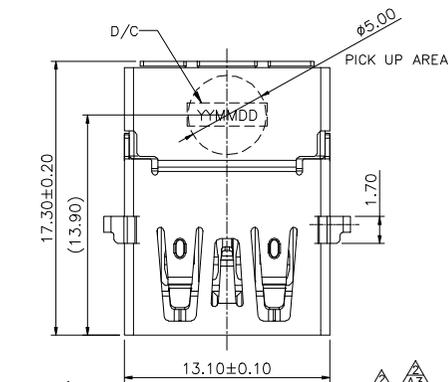

- NOTES:
- MATERIAL AND PLATING:
Housing: LCP+30%G.F,UL94V-0,Black
Contact: C5191, Gold Plating On Contact Area;
100u" Min. Tin Plating On Soldertails
50u" Min. Nickel Underplating Over All.
Shell: SUS201,50u"Min. Nickel Plated Over All.
 - MECHANICAL CHARACTERISTIC
Mating Force: 20N Max.
Unmating Force: 10~20N(Initial)
10~20N(After)
Durability: 5,000 Cycles.
 - ELECTRICAL CHARACTERISTIC
Current Rating: 1.8A(Pin1,4),
0.25A For Other Contacts.
Voltage Rating: 30V AC Max.
Contact Resistance: 30m Ohm Max.
Insulation Resistance: 100M Ohm Min.
Dielectric Withstanding Voltage: 100V AC.
 - TEMPERATURE
Operating Temperature: -40°C~+85°C
Storage Temperature: -60°C~+105°C
 - DATECODE INFORMATION:
YYMMDD (Y:YEAR M:MONTH D:DATE)
 - ORDER INFORMATION:

N3A-F E292 D R L A 3-00 01
1 2 3 4 5 6 7 8 9 10

- N3A:USB 3.0 A TYPE
- F:FEMALE
- E292=反向中心高-2.92mm(沉板更多)
- D:DIP
- R:90°
- L:LCP
- COLOR A:黑色
- 3:直角
- TYPE码: 00:普通规格
- Contact Area plating on contacts
01: 1u"

Contact Number	Signal Name
PIN1	VBUS
PIN2	D-
PIN3	D+
PIN4	GND
PIN5	StdA_SSRX-
PIN6	StdA_SSRX+
PIN7	GND_DRAIN
PIN8	StdA_SSTX-
PIN9	StdA_SSTX+
Shell	Shield

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE	NAME	DATE	PART NO.	DWG NO.
A0	新图面发行	21.02.23	LINEAR	1:1	Frey Yang	24.01.17	N3A-FE292DRLA3-0001	ENDE05
A2	产品结构及尺寸公差优化	21.10.14	ANGLES	APPROVED	Daniel Dong	24.01.17		
A3	更新插拔力标准	21.12.21	0.00±0.20	DESIGNER	Micky Ma	24.01.17		
A4	按实物更新图纸	24.01.17	0.000±0.10	DRAWN				
							TITLE	
							USB3.0 AF R/A DIP RVS TYPE	
							CH= -2.92	
REV	A4	SHEET	1/1					

JCTC®
TERMINAL&CONNECTORS


PACKAGING INSTRUCTION:

1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON
ALL CARTONS CLOSURES MUST BE DONE WITH TAPE.
2. FILL PACKAGING REEL WITH THE QUANTITIES AS INDICATED
IN THE CHART.




PRODUCT P/N	PARTS PER SHIPPING CARTON	PARTS PER REEL (S.P.Q.)	TOTAL REELS PER PRIMARY CARTON
N3A-FE292DRLA3-00xx	3000 (PCS)	300 (PCS)	10

1. QUANTITY: 300 PCS

2. COVER TAPE PEELING FORCE:



3. PART DIMENSIONS MEET EIA-481-D REQUIREMENT

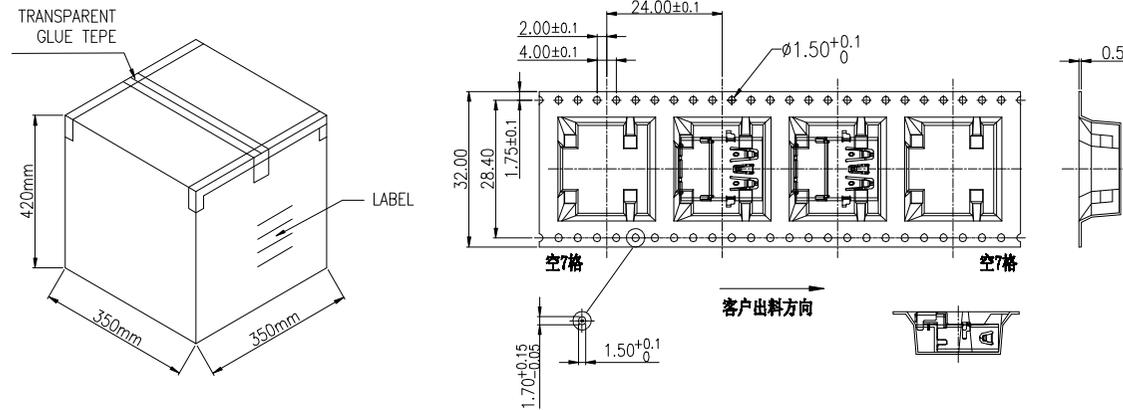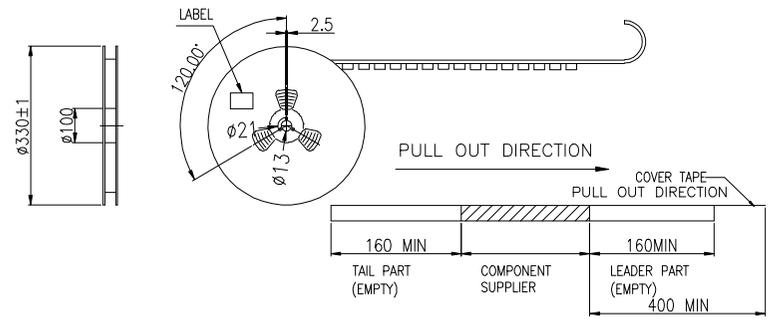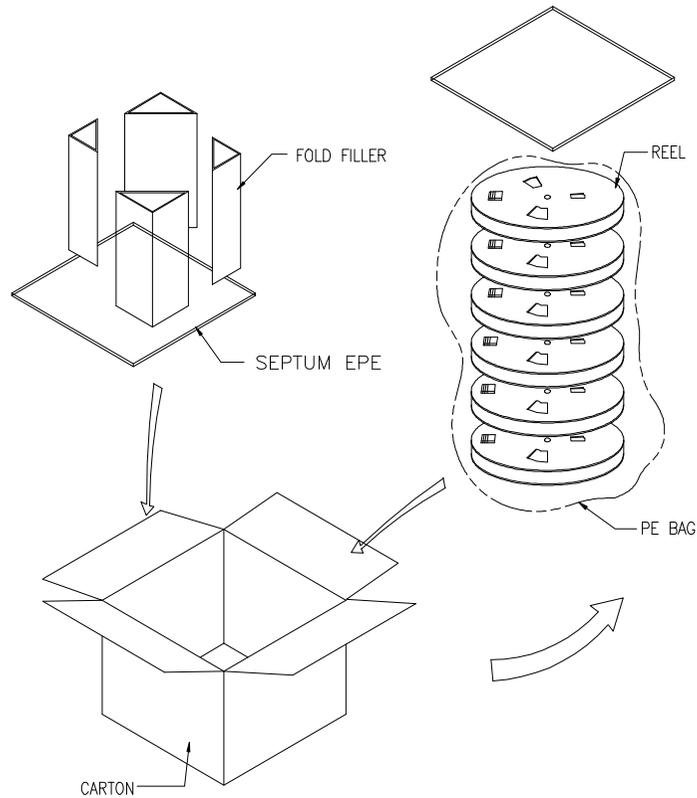

版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.
A0	21.02.23	新图面发行	李兴泽	

一般公差 GENERAL TOLERANCE

X.X	±0.30	X'	±2'
X.XX	±0.20	X.X'	±1'
X.XXX	±0.10	▲	MAJOR DIM.

单位 UNIT	mm
---------	----

绘图 DR.	李兴泽
校对 CHK.	
审核 CHK.	
核准 APPD.	

料号 PART NO.
N3A-FE292DRLA3-00xx

文件编号 NUMBER
ENDPT01

品名 TITLE
USB3.0 AF R/A DIP RVS TYPE
CH= -2.92 包装规范

JCTC®
TERMINAL & CONNECTORS

比例 SCALE	SHEET	版次 REV.
1/1	1/1	A0