
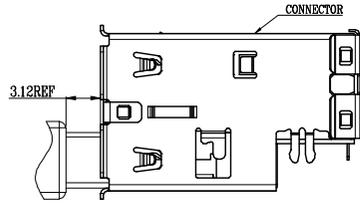


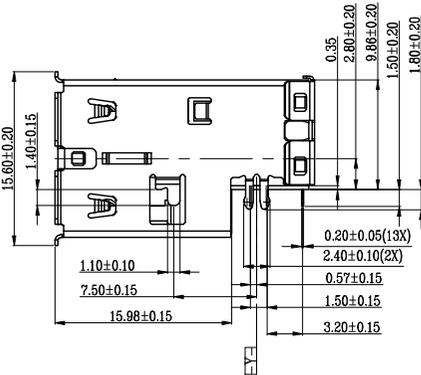

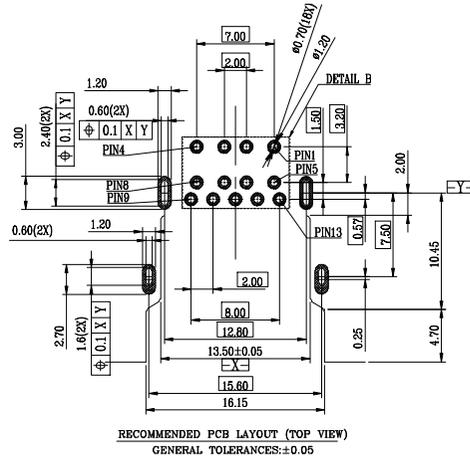



环保物料 HF

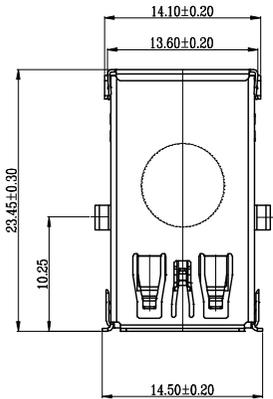

Remark:

1.MATERIAL:

- 1.1 Housing:PA9T+30%G.F UL94V-0, Color:Black/Blue.
Cover: LCP+30%G.F UL94V-0,Color:Black/Blue
 - 1.2 Contact1 3.0:C2680,Au 1/15/30u" MIN. PLATING ON CONTACT AREA 100u" MIN. MATTE TIN PLATING ON SOLDER TAILS 50u" MIN. NICKEL UNDERPLATING OVER ALL
 - 1.3 Contact2 2.0:C5191,Au 1/15/30u" MIN .PLATING ON CONTACT AREA100u" MIN.MATTE TIN PLATING ON SOLDER TAILS 50u" MIN. NICKEL UNDERPLATING OVER ALL
 - 1.4 Front Shell:SUS201, 60u" MIN. NICKEL PLATING.
 - 1.5 Rear Shell:SUS201 CLEAN
 - 1.6 MIDDLE Shell:SUS201 CLEAN
- 2.characteristics:
- 2.1 Rating Voltage : 30V AC.
 - 2.2 Rating Current:1.8A for VBUS and GND, and 0.25A for all other contacts
 - 2.3 Contact Resistance:30 mΩ MAX.
 - 2.4 Insulation Resistance:100 MΩ MIN.
 - 2.5 Withstanding Voltage:AC 500V.
 - 2.6 Mating force: 35N MAX
 - 2.7 Extraction force:10N~35N 8N AFTER TEST
 - 2.8 Life test:5000Cycles MIN.
 - 2.9 Temperature range:-55°C~+85°C.
 - 3.0 Recommended Process: wave solder 260°C+/-5°, 10 seconds.

N3A-F F280 D R 9 H 2-23 xx

1 2 3 4 5 6 7 8 9 10



- 1.N3A
- 2.F:FEMALE
- 3.F280=反向中心高2.80mm
- 4.D:DIP
- 5.R:90°
- 6.9:9T
- 7.COLOR H: U2黑色 U3:蓝色
- 8.外壳脚 2:鱼叉脚
- 9.TYPE码: 23:U2+U3
- 10.Contact Area plating on contacts
01: Au 1u" 15: Au 15u" 30: Au 30u"

Pin Number	Signal Name	Pin Number	Signal Name
1/10	VBUS	6/15	SSRX+
2/11	D-	7/16	GND
3/12	D+	8/17	SSTX-
4/13	GND	9/18	SSTX+
5/14	SSRX-	Shell	Shield



REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE 1:1	NAME	DATE	PART NO.	DWG NO.
A0	新图面发行	21.05.20	LINEAR	APPROVED			N3A-FF280DR9H2-23xx	ENDE05
A1	换图框发行	23.10.10	0.0±0.30	DESIGNER			TITLE	
			0.00±0.20	DRAWN	Mlicky Ma	23.10.10	DOUBLE USB 3.1 (GEN2)+USB2.0 A TYPE CH=2.8mm CONN	
			UNIT:MM					REV
			SIZE: A4					A1
			0.000±0.10					SHEET
			X°X'±2°					1/1

JCTC®

环保物料 HF

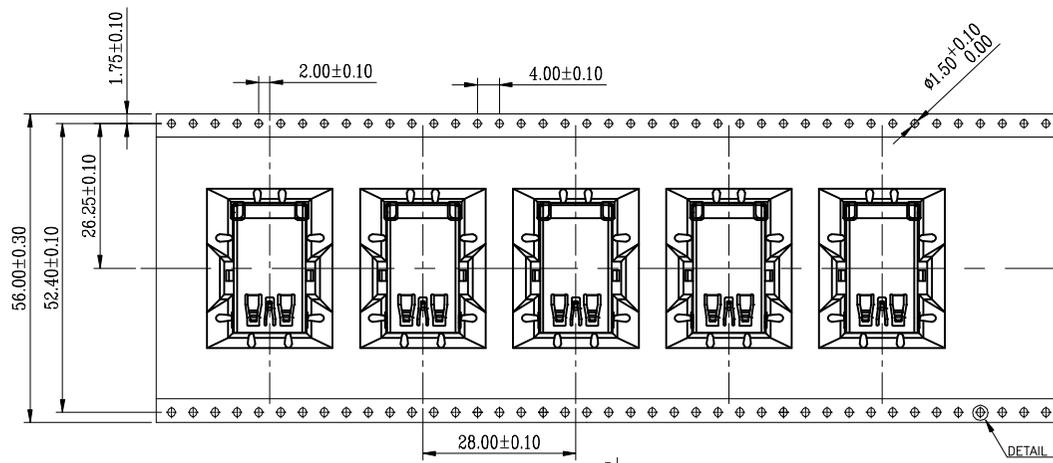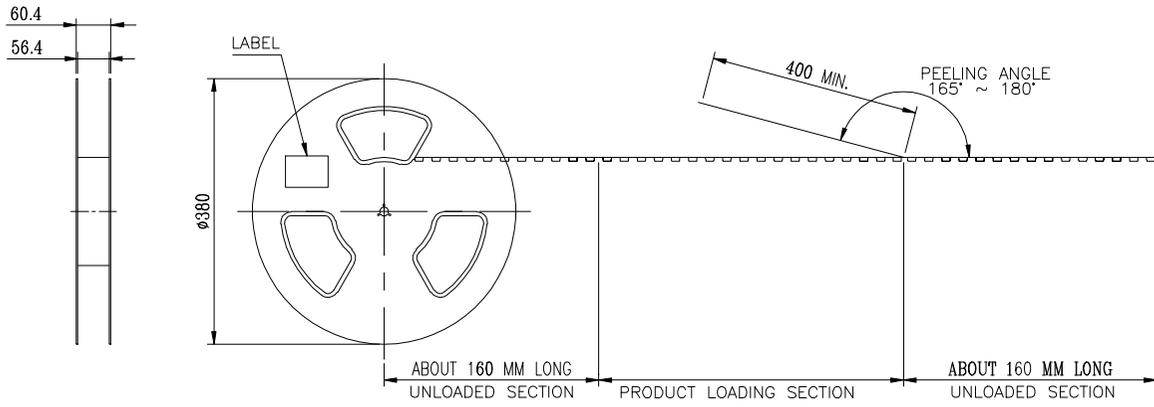

NOTE:
 1. PEELING SPEED: 300mm/MINUTE
 2. PEELING RESISTANCE: 20g~130g
 3. PEELING ANGLE: 165i~180i

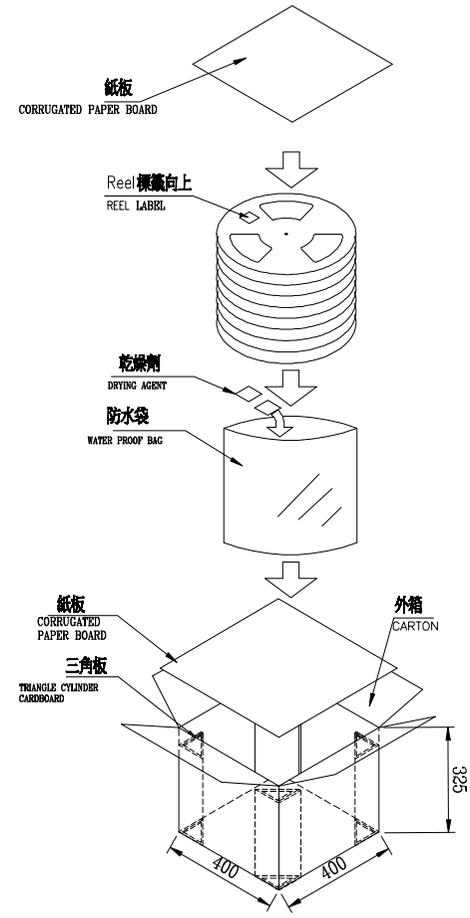

150	5	750 PCS	--KG	--KG
PCS/ REEL	REEL/ CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE	NAME	DATE	PART NO.	DWG NO.
A0	新图面发行	21.05.20	LINEAR	1:1			N3A-FF280DR9H2-23xx	ENDE05
A1	换图框发行	23.10.10	ANGLES	APPROVED				
			0.0±0.30	DESIGNER			TITLE	
			X°REF±6°	DRAWN	Mlicky Ma	23.10.10	DOUBLE USB 3.1 (GEN2)+USB2.0 A TYPE CH=2.8mm CONN	REV A1 SHEET 1/1
			0.00±0.20					
			X°±3°					
			0.000±0.10					
			X°X'±2°					

