

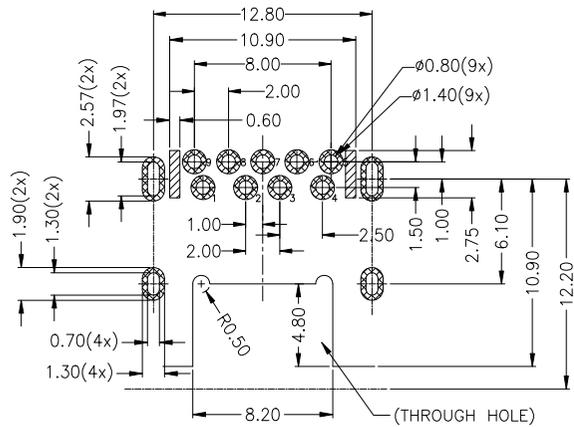
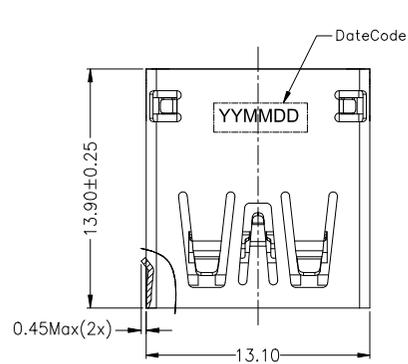

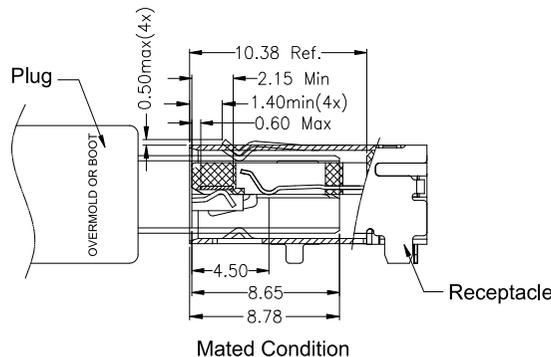
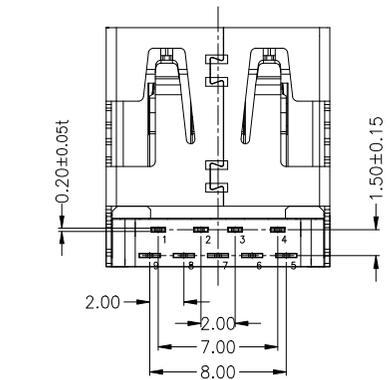
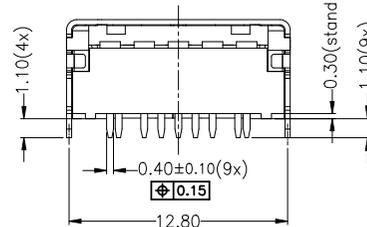


环保物料

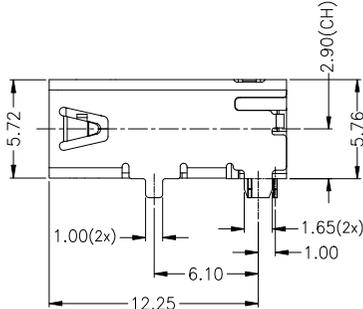

RECOMMENDED PCB LAYOUT (TOP VIEW)
GENERAL TOLERANCES:±0.05 (t=1.4)

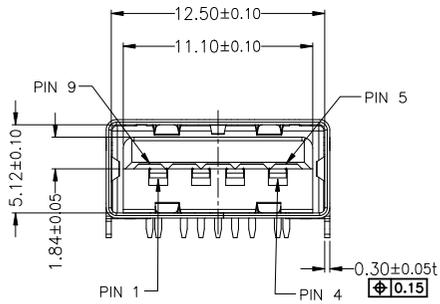

NOTES:

- MATERIAL AND PLATING:**
Housing: PA9T+30%G.F,UL94V-0,Black or Blue
Contact(4Pin): Copper Alloy,Au And Sn Plated.
Contact(5Pin): Copper Alloy,Au And Sn Plated.
Shell: Stainless Steel,Ni Plated.
- MECHANICAL CHARACTERISTIC**
Mating Force: 35N(3.57Kg) Max.
Unmating Force: 10N(1.02Kg) Min.
Durability: 5,000 Cycles.
- ELECTRICAL CHARACTERISTIC**
Current Rating: 1.8A(Pin1,4),
0.25A For Other Contacts.
Voltage Rating: 30V AC Max.
Contact Resistance: 30m Ohm Max.
Insulation Resistance: 100M Ohm Min.
Dielectric Withstanding Voltage: 100V AC.
- TEMPERATURE**
Operating Temperature: -40°C~+85°C
Storage Temperature: -60°C~+105°C
- DATECODE INFORMATION:**
YYMMDD (Y:YEAR M:MONTH D:DATE)
- ORDER INFORMATION:**

N3A-F F290 D R 9 x 2-F0 xx
1 2 3 4 5 6 7 8 9 10

- N3A:USB 3.0 A TYPE
- F:FEMALE
- F290=反向中心高2.90mm
- D:DIP
- R:90°
- TYPET 9
- COLOR A:Black. B:Blue
- 外壳脚 2:鱼叉脚
- TYPE码: F0:普通规格
- Contact Area plating on contacts
01: G/F 03: Au 3u"
05: Au 5u" 10: Au 10u"
15: Au 15u" 30: Au 30u"

Contact Number	Signal Name
PIN1	VBUS
PIN2	D-
PIN3	D+
PIN4	GND
PIN5	StdA_SSRX-
PIN6	StdA_SSRX+
PIN7	GND_DRAIN
PIN8	StdA_SSTX-
PIN9	StdA_SSTX+
Shell	Shield

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS
AO	The new version file were released	2022.11.07	LINEAR	1:1	Frey Yang	2022.12.12	N3A-FF290DR9x2-F0xx	ENDE05	
A1	更新图面发行	2022.12.12	ANGLES	APPROVED	Daniel Dong	2022.12.12	TITLE USB3.0 AF R/A DIP TYPE CH=2.9mm	REV	
			0.00±0.30 X° REF±6°	DESIGNER	Li Xing Ze	2022.12.12			
			0.00±0.20 X° ±3°	DRAWN				SHEET	1/1
			0.000±0.10 X° X' ±2°						

环保物料


PACKAGING INSTRUCTION I:

1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON
ALL CARTONS CLOSURES MUST BE DONE WITH TAPE.
2. FILL PACKAGING REEL WITH THE QUANTITIES AS INDICATED
IN THE CHART.



PRODUCT P/N	PARTS PER SHIPPING CARTON	PARTS PER REEL (S.P.Q.)	TOTAL REELS PER PRIMARY CARTON
SSB-A09F-XXT-UNE8/E9	3000 (PCS)	300 (PCS)	10

1. QUANTITY: 300 PCS

2. COVER TAPE PEELING FORCE:



3. PART DIMENSIONS MEET EIA-481-D REQUIREMENT

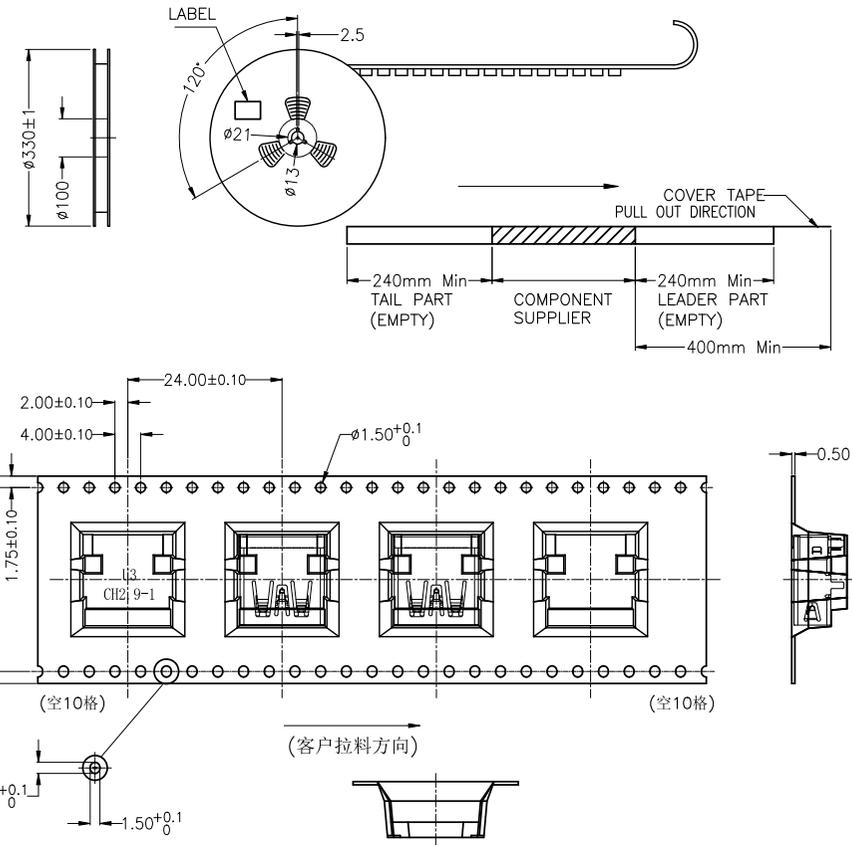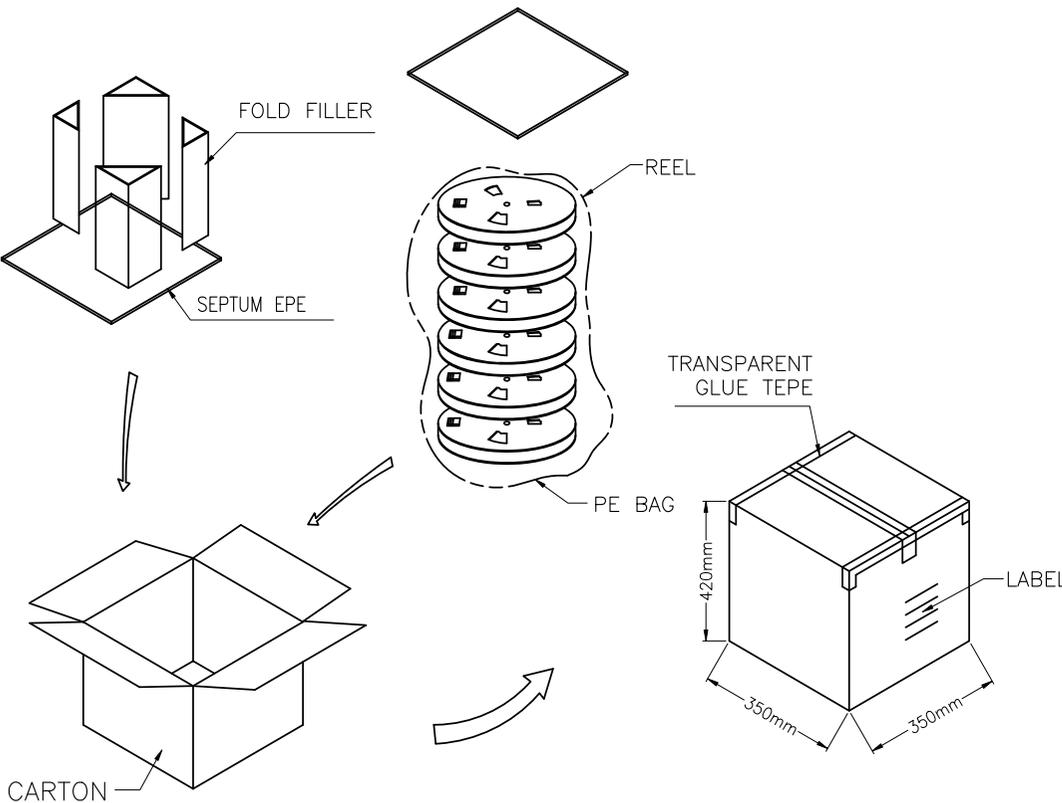

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.	 JCTC ® TERMINAL&CONNECTORS
AO	The new version file were released	2022.11.07		LINEAR	ANGLES	APPROVED	Frey Yang	2022.11.07	N3A-FF290DR9x2-F0xx	ENDE05	
			0.00±0.20	X° ±3°	DESIGNER	Daniel Dong	2022.11.07	TITLE USB3.2 GEN2 AF R/A DIP TYPE CH=2.9mm			
			0.000±0.10	X° X' ±2°	DRAWN	Li Xing Ze	2022.11.07				
REV	AO	SHEET	1/1								