
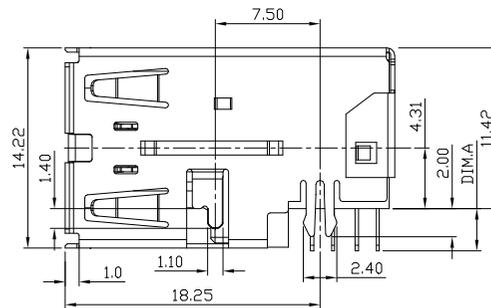
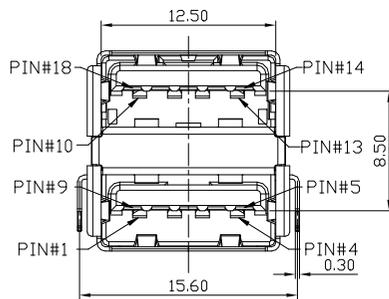
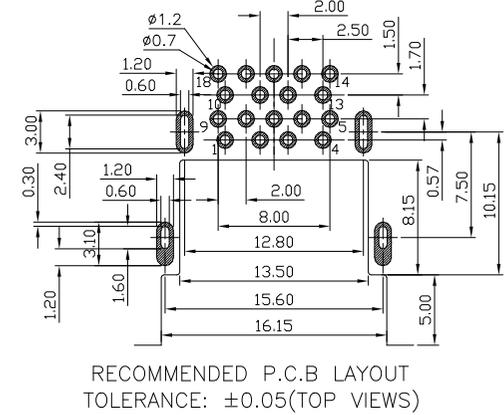
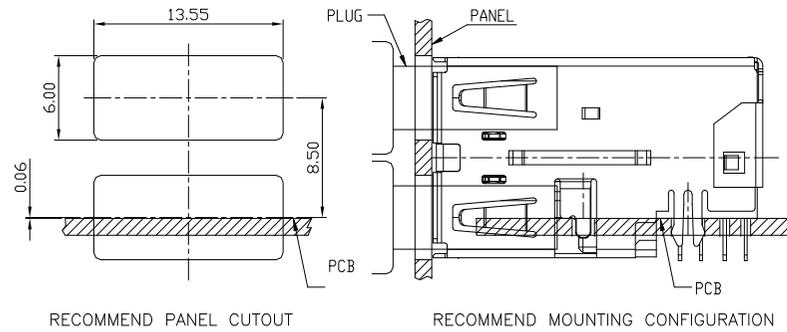


环保物料

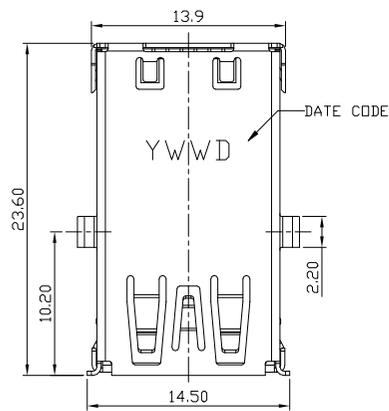

N3A-F F431 D R L B 2-XX 30
 1 2 3 4 5 6 7 8 9 10

- 1.N3A:USB 3.0 A TYPE
- 2.F:FEMALE
- 3.F431=中心高4.31mm
- 4.D:DIP
- 5.R:90°
- 6.L:L=PA4T
- 7.COLOR B:BLUE
- 8.外壳脚 2:鱼叉脚
- 9.TYPE码: R0
- 10.Contact Area plating on contacts
 30: Au 30u"

- NOTES:
1. MATERIAL:
 - 1.1 HOUSING & COVER: PA4T, UL94V-0, COLOR : BLUE.
 - 1.2 CONTACTS 5PIN: BRASS,
 - 1.3 CONTACTS 4PIN: PHOSPHOR BRONZE,
 - 1.4 SHELL: SUS201.
 - 1.5 ISOLATED: SK7.
 - 1.6 REAR SHELL: SK7.
 2. FINISH:
 - 2.1 CONTACTS: 0.762um[30u"] GOLD PLATED ON CONTACT AREA,
 2.54um[100u"] MIN. MATTE-TIN PLATED ON SOLDER TAIL,
 1.27um[50u"] MIN. NICKEL UNDERPLATED OVERALL.
 - 2.2 SHELL: 1.27um[50u"] MIN. NICKEL PLATED OVERALL.
 - 2.3 ISOLATED: 1.27um[50u"] MIN. NICKEL PLATED OVERALL.
 3. REFLOW SOLDER CAPABLE TO 260°C
 - 4.OPERATING TEMPERATURE:-40°C ~ 85°C

N3A-FF431DRLB2-R330	3.0	T&R
N3A-FF431DRLB2-R230	2.4	
N3A-FF431DRLB2-R130	3.0	TRAY
N3A-FF431DRLB2-R030	2.4	
PART NUMBER	DIM.A	PACKING

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS		
A0	The new version file were released	2021.04.21		LINEAR	ANGLES	1:1						APPROVED	N3A-FF431DRLB2-XX30
A1	更新图面发行	2023.09.01	0.0±0.25	X° REF±6°		DESIGNER	TITLE						
			UNIT: MM	0.00±0.15	X° ±3°	DRAWN	Li Xing Ze	2023.09.01	USB 3.0 A TYPE DIP				
			SIZE: A4	0.000±0.08	X° X' ±2°				沉板式雙層加高(CH=4.31mm)	REV	A1	SHEET	1/1