

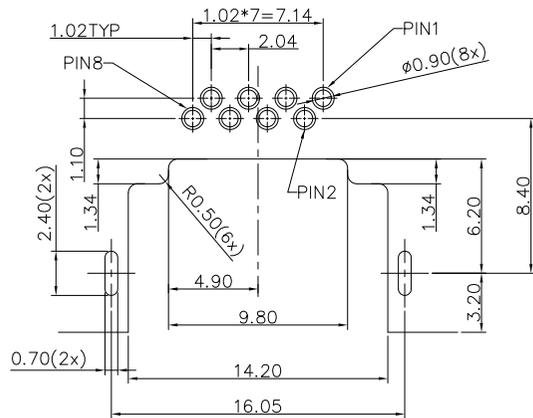
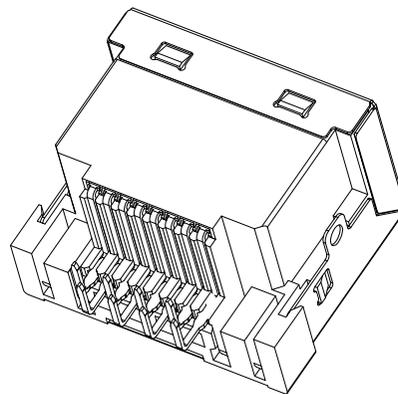
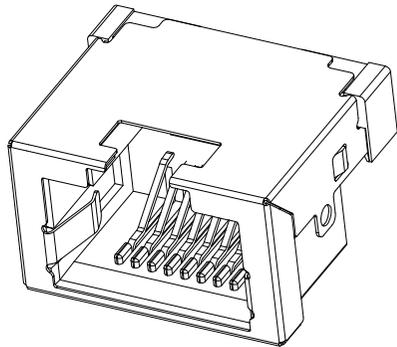




环保物料

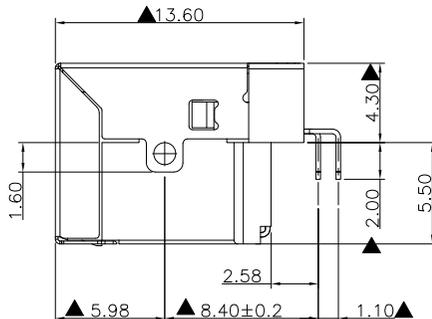

RECOMMENDED PCB LAYOUT

TOLERANCE ± 0.05

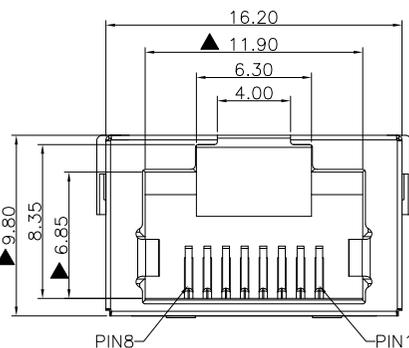

N45-1 C55 D R 2 8 9 0-3 01
1 2 3 4 5 6 7 8 9 10 11

- 1.N45:RJ45
- 2.1:单体
- 3.C55=沉板5.5mm
- 4.D:DIP
- 5.R:90°
- 6.外壳和柱子2:外壳+没柱子
- 7.8:8PIN
- 8.9:PA9T
- 9.TYPE 码 0: 常规
- 10.是否带灯 3:没灯
- 11.Contact Area plating on contacts
- 01: G/F

NOTE:

- 1.ELECTRICAL CHARACTERISTICS;
 - 1.1 VOLTAGE RATING:125 VAC RMS
 - 1.2 CURRENT RATING:1.5AMP
 - 1.3 CONTACT RESISTANCE:30 MILLIOHMS MAX
 - 1.4 INSULATION RESISTANCE:1000 MEGOHMS MIN
 - 1.5 DIELECTRIC STRENGTH:1000V AC RMS 50Hz.1MIN
- 2 ENVIRONMENTAL:
 - 2.1 TEMPERATURE RANGE:-40°C +85°C
 - 2.2 RELATIVE HUMIDITY:90 95%(40±2°C)
- 3.标示"▲"符号的尺寸为重点检验尺寸;

3	SHELL	1	SUS304	NI PLATED
2	CONTACT	8	C5191	AU/SN PLATED
1	HOUSING	1	PA9T	(UL 94V-0)
No.	PART NAME	QTY	MATERIAL	REMARK

REV.	REVISION RECORD	DATE
A0	新图面发行	22.04.20



UNIT: MM

SIZE: A4


GENERAL TOLERANCES		SCALE	NAME	DATE
LINEAR	ANGLES	1:1	Frey Yang	22.04.20
0.0±0.30	X° REF±6°	APPROVED	Daniel Dong	22.04.20
0.00±0.20	X° ±3°	DESIGNER	CGY	22.04.20
0.00±0.10	X° X'±2°	DRAWN		

PART NO.	DWG NO.
N45-1C55DR2890-301	ENDE05
TITLE	
RJ-45 Jack	






REV	A0	SHEET	1/1
-----	----	-------	-----

环保物料

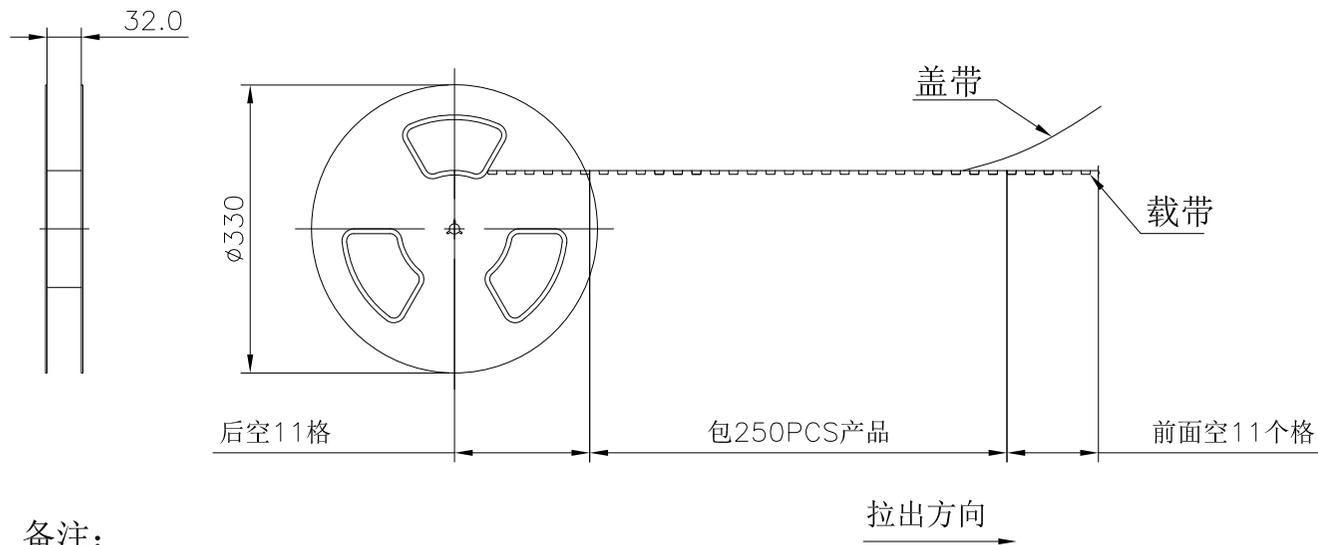

备注:

1. 载带材质: PS 透明
2. 盖带材质: PET 透明料

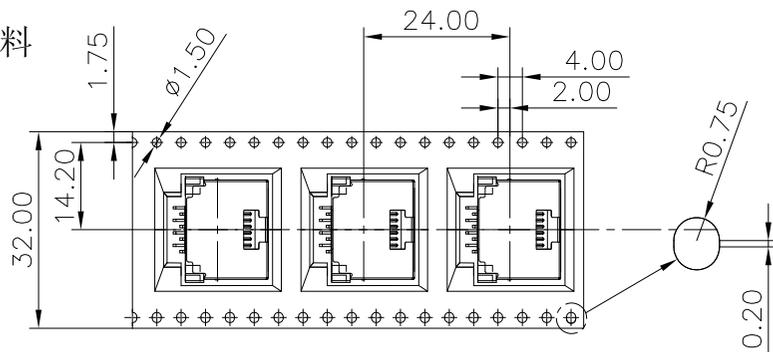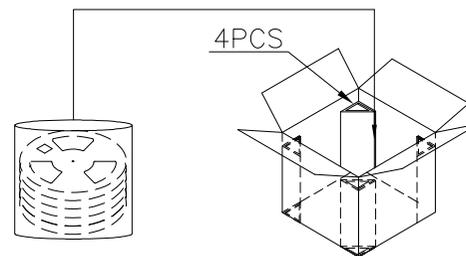

- 3-1. 将10盘装入PE胶袋,再放入纸箱中。
- 3-2. 纸箱4个角落用缓冲材料塞好,并盖上与之相配的纸板
备注: 纸箱的规格: 350*350*380(mm)
PE胶袋的规格: (长) 650mm*(宽) 620mm*(厚) 0.05mm
- 3-3. 包装明细:

盘/每箱	PCS/每盘	PCS/每箱
10盘/每箱	250PCS/每盘	2500PCS/每箱

- 4-1 纸箱开口处以透明胶带贴合.
- 4-2 若有未装满的零数箱,必须以缓冲材塞

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
A0	新图面发行	22.04.20		SIZE: A4	LINEAR	ANGLES	APPROVED	Frey Yang	22.04.20	N45-1C55DR2890-301		ENDE05		
			0.0±0.30		X° REF±6°	DESIGNER	Daniel Dong	22.04.20	TITLE					
			0.00±0.20	X° ±3°	DRAWN	CGY	22.04.20	RJ-45 Jack						
			0.00±0.10	X° X' ±2°							REV	A0	SHEET	1/1