


环保物料

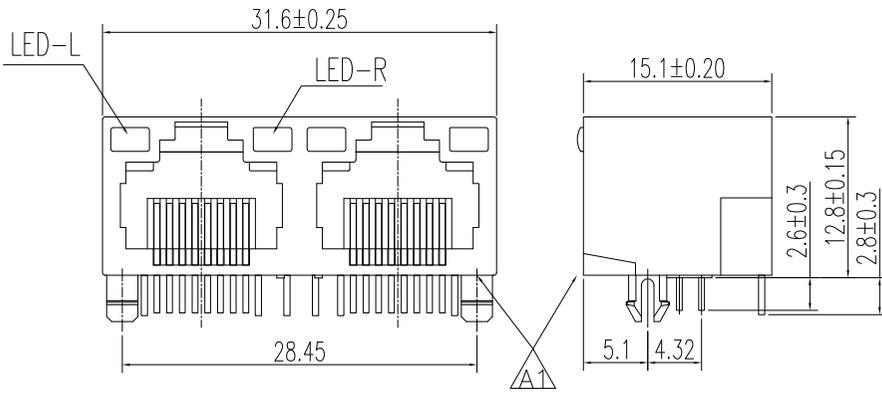

SPECIFICATIONS :

MATERIAL:

1.HOUSING MATERIAL:GLASS FILLED PA46(UL94V-0)BLACK.

2.CONTACT MATERIAL:PHOSPHOR BRONZE Φ 0.46MM.

3.PLATING:GOLD PLATING $Fu''-50u''$ OVER NICKEL.

ELECTRICAL:

1.VOLTAGE RATING:125Vac RMS .

2.CURRENT RATING:1.5AMP .

3.CONTACT RESISTANCE:30m Ω MAX .

4.INSULATION RESISTANCE:500M Ω MIN @ 500Vdc .

5.DIELECTRIC WITHSTANDING VOLTAGE:1000Vac RMS 50Hz 1MIN.

MECHANICAL:

1.DURRABILITY :750 CYCLES MIN.


2.INSERTION FORCE:2.2Kgf MAX.

3.RETENTION STRENGTH :7.7Kgf MIN BETWEEN JACK AND PLUG.

ENVIRONMENTAL:

1.STORAGE TEMPRATURE : -40°C TO 85°C .

2.OPERATION TEMPRATURE : -40°C TO 70°C .

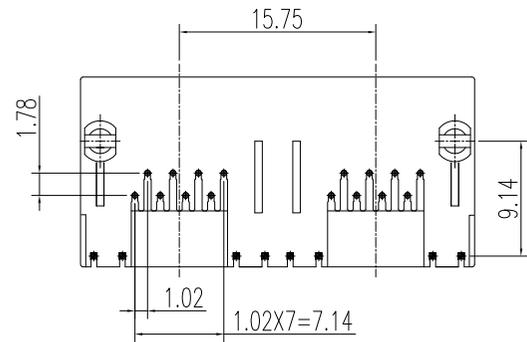

N45-C D12 D R 5 8 4 0-1 01

1 2 3 4 5 6 7 8 9 10 11

1.N45:RJ45

2.C:1排X2

3.D12=板上高度12.80

4.D:DIP

5.R:90°

6.外壳和柱子

5:没外壳+双柱

7.8:8PIN


8.4:PA46

9.TYPE 錫 0:常规

10.是否带灯 1.左黄右绿

11.Contact Area plating on contacts


01: G/F

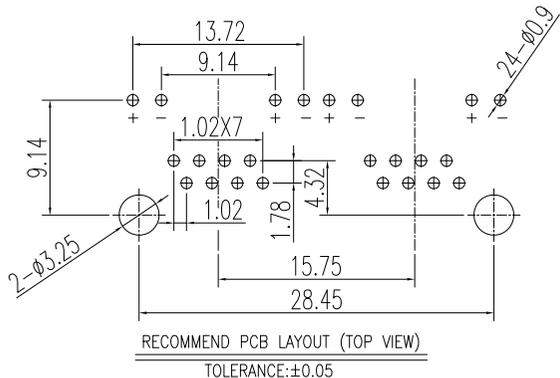

RECOMMEND PCB LAYOUT (TOP VIEW)
TOLERANCE:±0.05

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO. N45-CD12DR5840-101	DWG NO. ENDE05			
AO	新图面发行	22.06.30		LINEAR	ANGLES	APPROVED							
A1	按实物更新图面	23.12.05	UNIT: MM	0.0±0.30	X° REF±6°	DESIGNER	Dalan Dai	23.12.05	TITLE KC5JA series PCB JACK	REV	A1	SHEET	1/1
			SIZE: A4	0.00±0.20	X° ±3°	DRAWN							
				0.000±0.10	X° X' ±2°								

环保物料

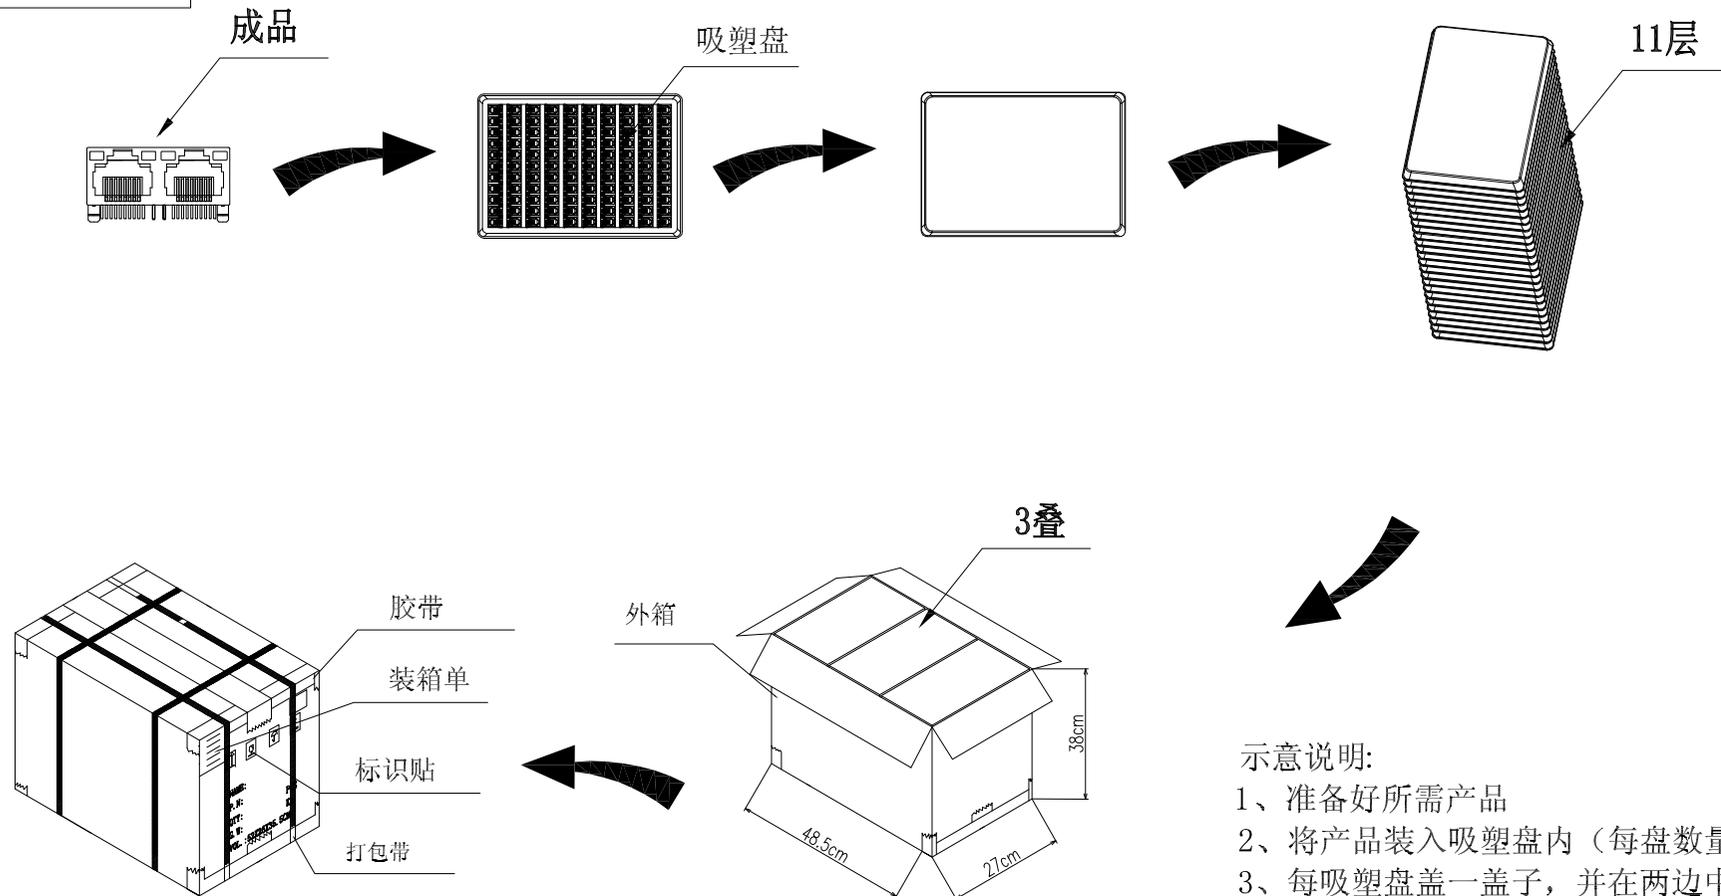

示意说明:

- 1、准备好所需产品
- 2、将产品装入吸塑盘内（每盘数量: 40 只/盘）
- 3、每吸塑盘盖一盖子，并在两边中间各打一订书丁（根据客户要求确定是否在右上角贴标签）。
- 4、每11盘为一叠，每叠数量: 11 盘/叠X40只/盘=440只
- 5、产品叠好后装入外箱中
- 6、一箱3叠；每箱数量：63盘/叠X40只/盘=2520只
- 7、将装好的成品打包封箱，贴上装箱单

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.				
A0	新图面发行	22.06.30		LINEAR	ANGLES	APPROVED			N45-CD12DR5840-101	ENDE05				
A1	换图框发行	23.12.05	UNIT: MM	0.0±0.30	X° REF±6°	DESIGNER			TITLE					
			SIZE: A4	0.00±0.20	X° ±3°	DRAWN	Dalan Dai	23.12.05	KC5JA series PCB JACK					
				0.000±0.10	X° X' ±2°						REV	A1	SHEET	1/1