
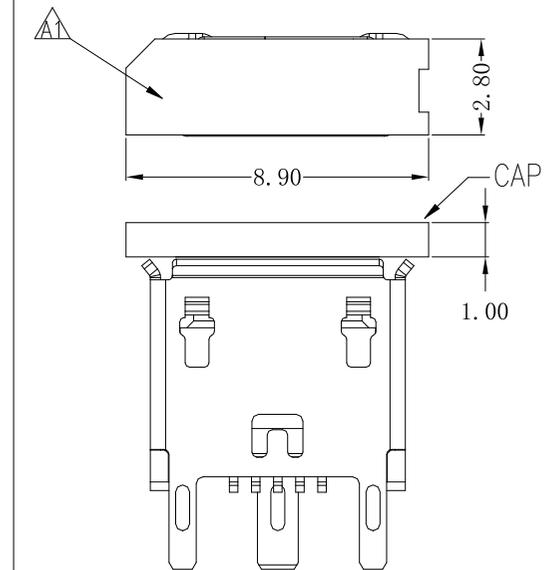


RECOMMEND PCB LAYOUT (THICKNESS=1.6mm)  
TOLERANCE:  $\pm 0.05$



Note:

1.Material:

- 1.1 Housing: LCP black,UL94-V0
- 1.2 Contact: C2680,t=0.15mm
- 1.3 Shell:SUS201,t=0.3mm

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 50 MΩ Max.
- 2.4 Insulation resistance: 100 MΩ Min.
- 2.5 Total mating force: 3.57 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min
- 2.7 Temperature range:  $-30^{\circ}\text{C}\sim 80^{\circ}\text{C}$

N5M-F L615 R L A 3-00 xx

1 2 3 4 5 6 7 8 9

1.N5M:MICRO USB 5PIN

2.F:FEMALE

3. L615=直立式 板上高度6.15mm

4.R:180°

5.L:LCP

6.COLOR A:黑色


7.外壳脚 3:直脚

8.TYPE码: 00

9.Contact Area plating on contacts

01: G/F 15: 15u" 30: 30u"

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.			
A0	The new version file were released	2015.12.20		LINEAR	ANGLES	1:1							
A1	依实物更新图纸	23.08.22	0.0 $\pm$ 0.25	X° REF $\pm$ 6°	APPROVED	N5M-FL615RLA3-00xx	ENDE05						
			0.00 $\pm$ 0.15	X° $\pm$ 3°	DESIGNER	TITLE							
			0.000 $\pm$ 0.08	X° X' $\pm$ 2°	DRAWN	Micky Ma	23.08.22	MICRO USB B/F 5PIN 立贴三脚卷边		REV	A1	SHEET	1/1

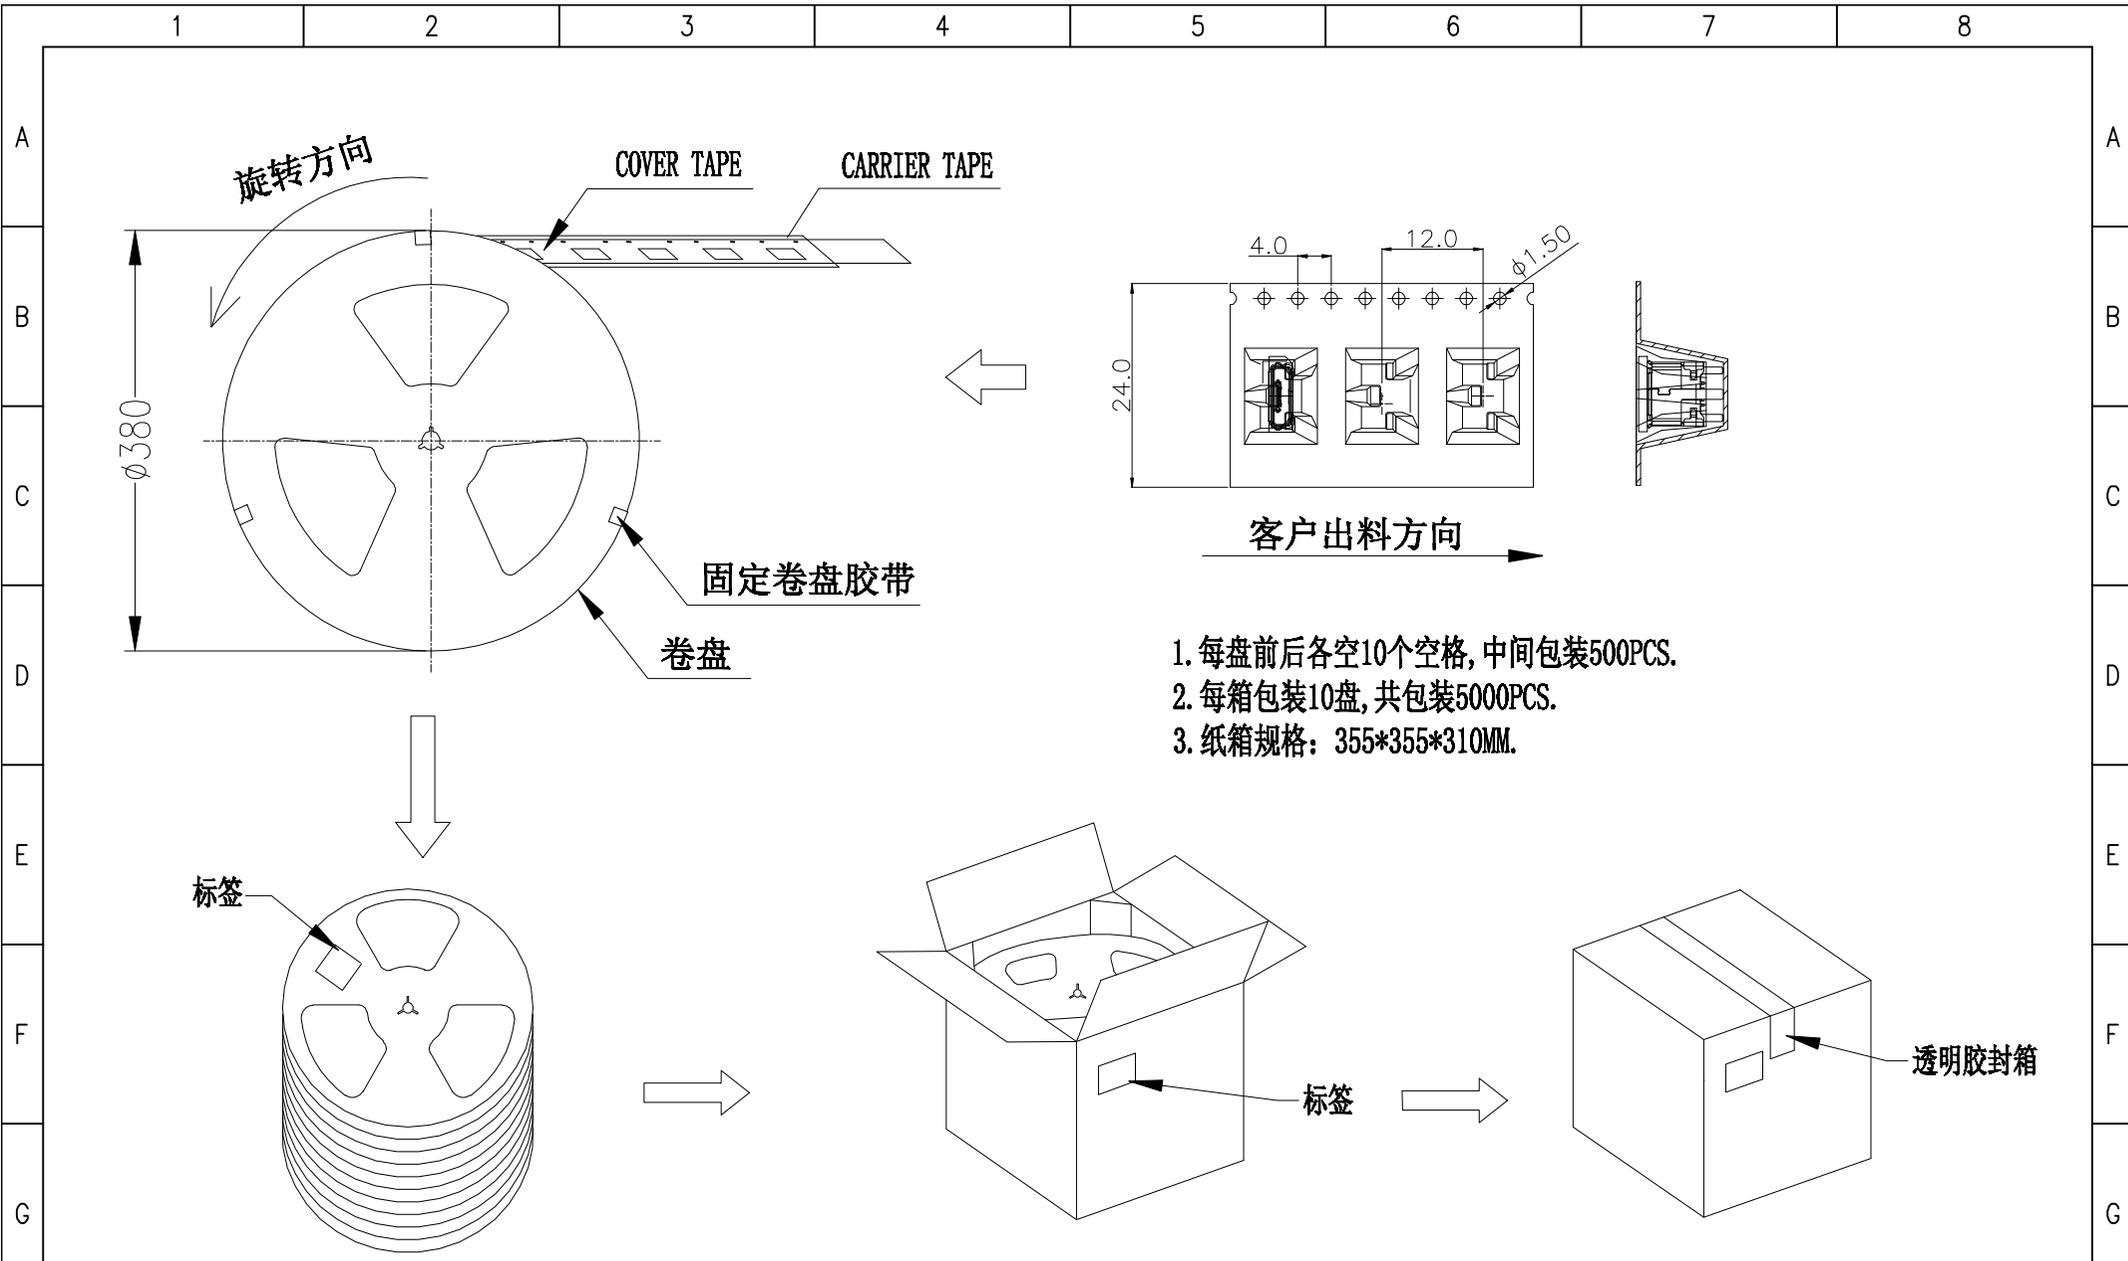

1. 每盘前后各空10个空格, 中间包装500PCS.
2. 每箱包装10盘, 共包装5000PCS.
3. 纸箱规格: 355\*355\*310MM.

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.				
				LINEAR	ANGLES									
A0	The new version file were released	15.12.20		0.0±0.25	X° REF±6°	APPROVED			N5M-FL615RLA3-00xx	ENDE05				
A1	更新图框发行	23.08.22		0.00±0.15	X° ±3°	DESIGNER			TITLE MICRO USB B/F 5PIN 立贴三脚卷边					
A2	更新包装数量	23.09.14	UNIT: MM	0.000±0.08	X° X' ±2°	DRAWN	Micky Ma	23.09.14			REV	A2	SHEET	1/1