

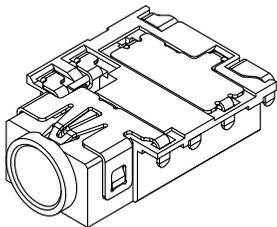
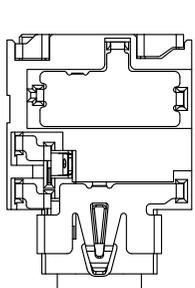
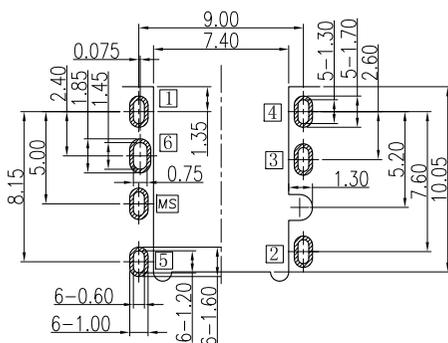
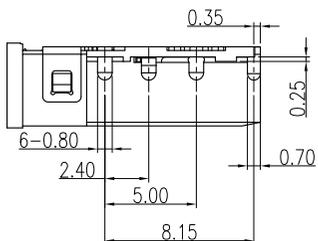


环保物料

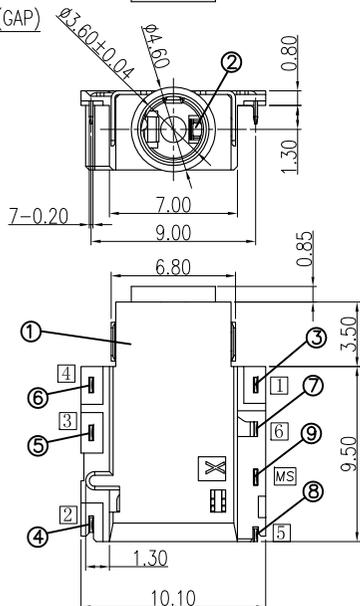

3D VIEW

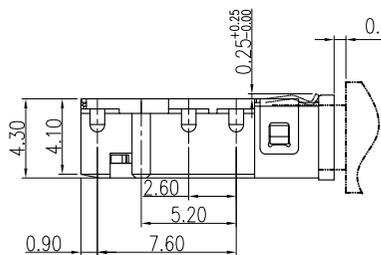

RECOMMENDED P.C.B LAYOUT

TOP VIEW (TOLRANCE:±0.05)

NOTES:

1. MATERIAL: SEE "TABLE 1";
2. FINISH: SEE "TABLE 1";
3. ELECTRICAL:
  - 3.1. VOLTAGE RATING: 12 VAC RMS;
  - 3.2. CURRENT RATING: 0.5 AMP;
  - 3.3. CONTACT RESISTANCE: 50mΩ Max.(Initial), 100mΩ Max.(After Life test);
  - 3.4. INSULATION RESISTANCE: 1000 MΩ Min., 500VDC.(Initial), 100 MΩ Min., 500VDC.(After Humidity test);
  - 3.5. WITHSTAND VOLTAGE: 500 VAC RMS 50(60)Hz, 1 minute;
4. MECHANICAL:
  - 4.1. MATING FORCE: 3.0Kgf MAX.;
  - 4.2. UNMATING FORCE: 0.3Kgf MIN.;
  - 4.3. OPERATING LIFE: 5000 CYCLES MIN.;
5. ENVIRONMENTAL:
  - 5.1. OPERATION: -30°C~+80°C.

PJ-3 B13 D R 1 7 T 0-B2 01  
1 2 3 4 5 6 7 8 9 10 11

- 1.PJ:Phone Jack
- 2.3:ø3.6mm
- 3.B13=中心高-1.3mm
- 4.D:DIP
- 5.R:90°
- 6.1:无外壳
- 7.7:7PIN
- 8.T:PA10T
- 9.柱子/喷啦  
0:无柱无喷啦
- 10.TYPE 码: B2:Ring环外径4.60mm
- 11.Contact Area plating on contacts  
01: G/F


PLUG SPEC	SCHEMATIC	AFTER INSERT SCHEMATIC

TABLE 1:

NO.	PART NAME	QTY	MATERIAL	DESCRIPTION	REMARK
①	Shell	1	SUS304	Ni 50u" Min	T=0.20mm
②	Contact_5	5	C5210	T=0.20mm	
③	Contact_6	1	C5210	Gold Flash On Contact And Solder Tail Area,50u" Nickel UnderPlated	T=0.20mm
④	Contact_4	4	C5210	T=0.20mm	
⑤	Contact_3	3	C5210	Gold Flash on contact area, Plate Matte tin on solder tail, Nickel underplated.	T=0.20mm
⑥	Contact_2	2	C5210	T=0.20mm	
⑦	Contact_1	1	C5210	T=0.20mm	
⑧	Separator	1	LCP	Black,UL94V-0	
⑨	Housing	1	PA10T	Black,UL94V-0	




REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
A0	新图面发行	2021.11.29	LINEAR 0.0±0.30 0.00±0.20 SIZE: A4 0.000±0.10	1:1	Frey Yang	2021.11.29	PJ-3B13DR17T0-B201	ENDE05				
			ANGLES X° REF±6° X° ±3° X° X'±2°	APPROVED	Daniel Dong	2021.11.29	TITLE		REV	AO	SHEET	1/1
			UNIT: MM	DESIGNER	Micky Ma	2021.11.29	ø3.5mm Phone Jack CONN.					

# 环保物料

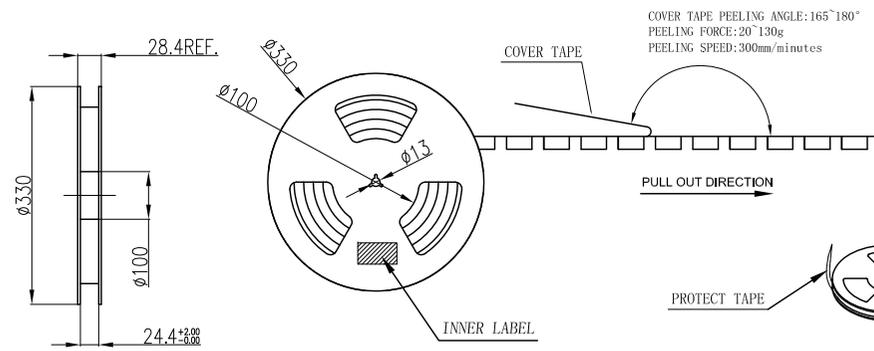


COVER TAPE PEELING ANGLE:165~180°  
PEELING FORCE:20~130g  
PEELING SPEED:300mm/minutes


PULL OUT DIRECTION

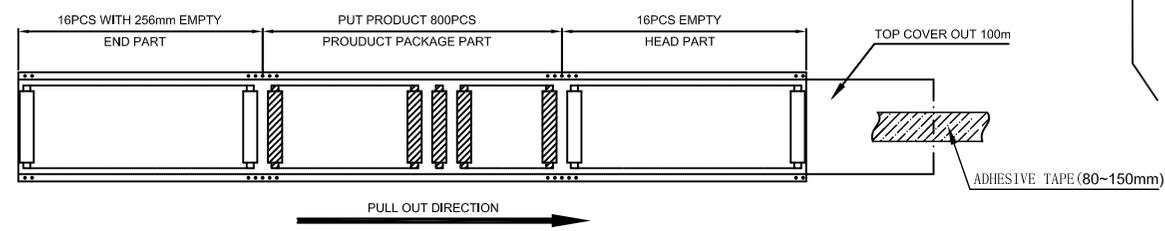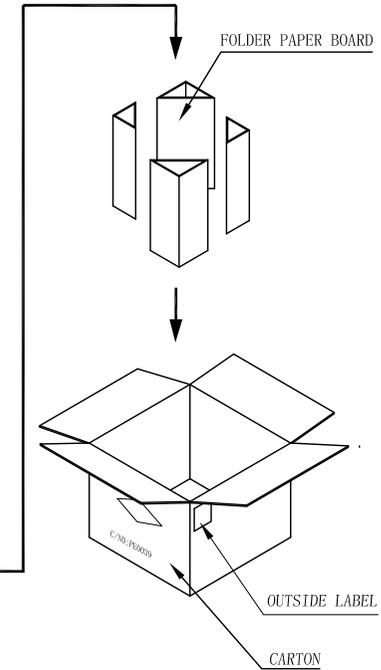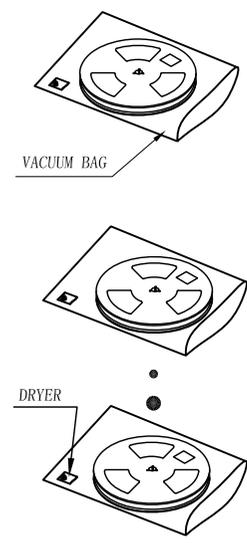

PULL OUT DIRECTION

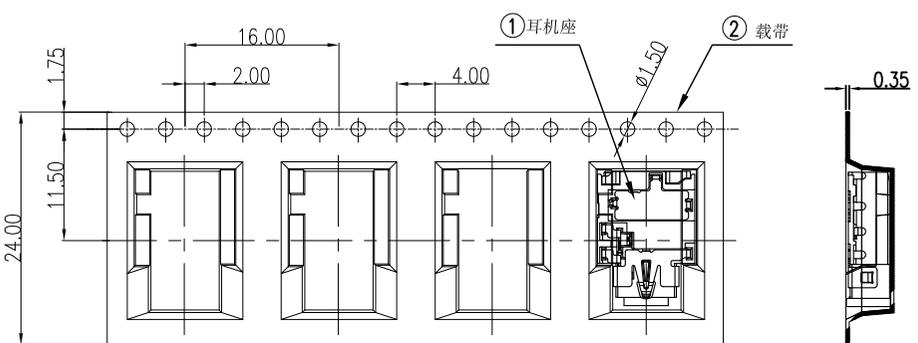

- NOTES:
- Material requirements:
    - The carton material requirements for the K=A, Dimension is 350\*340\*310mm;
    - Reel materials for PET; size reel for 330\*28.4.
  - Packaging requirements:
    - The tape into the packing machine, before the empty 16PCS, after the release of the product 800PCS, then the empty 16PCS with 256mm length of stay;
    - Top cover should out 100mm of the carrier tape. After winding, using adhesive tape (80~150mm) to stick the leader of cover tap on the side of the carrier tape;
    - Winding a protect tape arroud the reel, then stick it by adhesive tape;
    - label should paste in the designated area of the reel;
    - Put a dryer and a packed reel in the vacuum bag and make the vacuum process;
    - The tired folded 10 disks in the carton total 8000pcs;
    - Packed finished packing sealing, and in the outer carton label

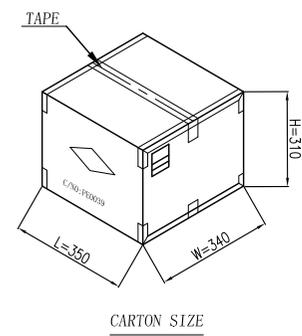

1 CARTON = 10 REEL = 8000 PRODUCT

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS
A0	新图面发行	2021.11.29		LINEAR	ANGLES	1:1	Frey Yang	2021.11.29	PJ-3B13DR17T0-B201	ENDE05	
			0.00±0.20	X° ±3°	DESIGNER	Daniel Dong	2021.11.29	TITLE			
			SIZE: A4	0.000±0.10	X° X' ±2°	DRAWN	Micky Ma	2021.11.29	ø3.5mm Phone Jack CONN.		