

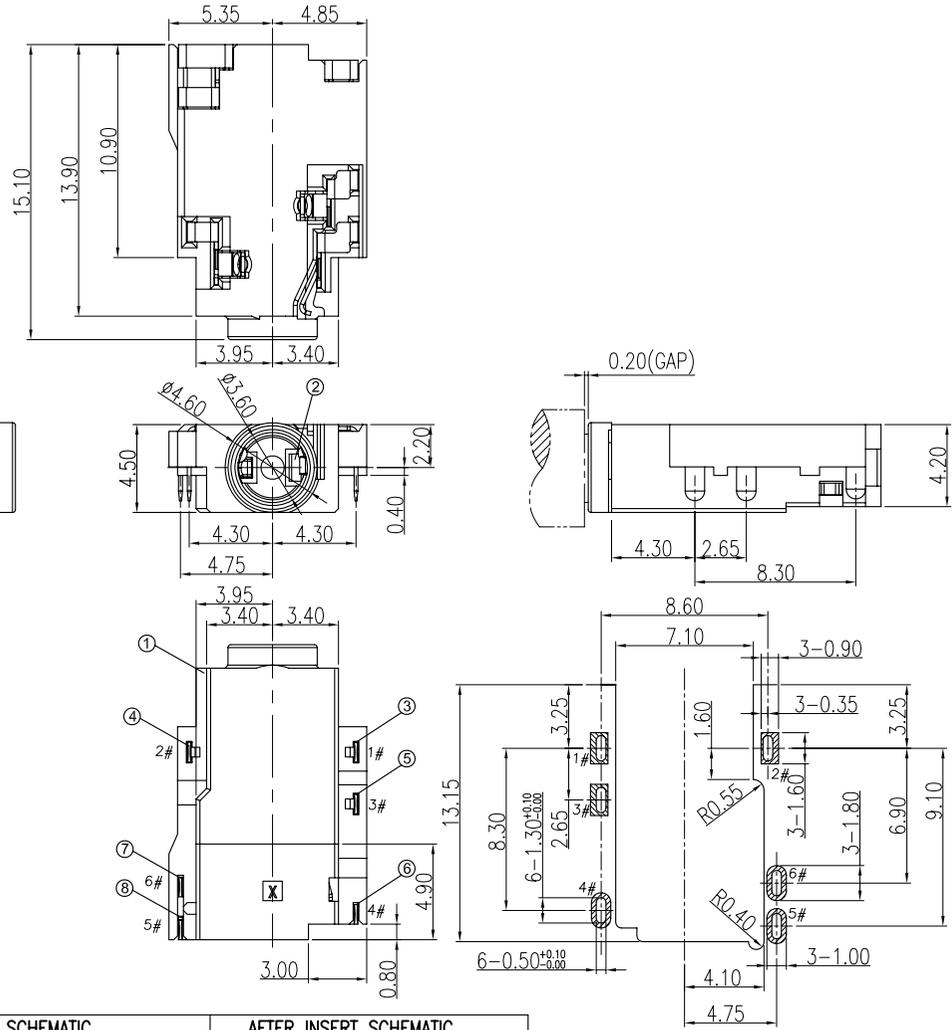


环保物料

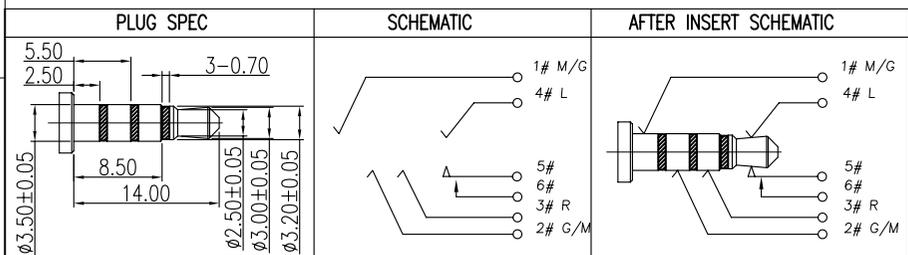

- NOTES:
- MATERIAL: SEE "TABLE 1";
 - FINISH: SEE "TABLE 1";
 - ELECTRICAL:
 - VOLTAGE RATING: 12 VAC RMS;
 - CURRENT RATING: 0.5 AMP;
 - CONTACT RESISTANCE: 50mΩ Max.(Initial), 100mΩ Max.(After Life test);
 - INSULATION RESISTANCE: 1000 MΩ Min., 500VDC.(Initial), 100 MΩ Min., 500VDC.(After Humidity test);
 - WITHSTAND VOLTAGE: 500 VAC RMS 50(60)Hz, 1 minute;
 - MECHANICAL:
 - MATING FORCE: 3.0Kgf MAX.;
 - UNMATING FORCE: 0.3Kgf MIN.;
 - OPERATING LIFE: 5000 CYCLES MIN.;
 - ENVIRONMENTAL:
 - OPERATION: -30°C~+80°C.




PCB HOLES(TOP VIEW) t=1.0mm
NOTE:GENERAL TOLERANCE:±0.05mm

TABLE 1:

NO.	PART NAME	QTY	MATERIAL	DESCRIPTION	REMARK
⑧	Contact_5	1	Copper Alloy	CONTACT AREA: GF SOLDER AREA: GF, Ni 50u" OVER ALL	T=0.20mm
⑦	Contact_6	1	Copper Alloy		T=0.20mm
⑥	Contact_4	1	Copper Alloy		T=0.20mm
⑤	Contact_3	1	Copper Alloy		T=0.20mm
④	Contact_2	1	Copper Alloy		T=0.20mm
③	Contact_1	1	Copper Alloy		T=0.20mm
②	Separator	1	HIGH TEMP	BLACK,UL94V-0	
①	Housing	1	HIGH TEMP	BLACK,UL94V-0	

A0		21.05.19	新图面发行	董东平	杨章雄	一般公差 GENERAL TOLERANCE		绘图 DR. 李兴泽	料号 PART NO. PJ-3C04DR06T0-0001	文件编号 NUMBER ENDPT01	 TERMINAL&CONNECTORS
版次REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位 UNIT mm	X.X ±0.30 X.XX ±0.20 X.XXX ±0.10	X' ±2' X.X' ±1' ▲ MAJOR DIM.	校对 CHK. 董东平	品名 TITLE	比例 SCALE	
								审核 CHK. 董东平	∅3.5mm Phone Jack CONN.	1/1	
								核准 APPD. 杨章雄		1/1	

环保物料



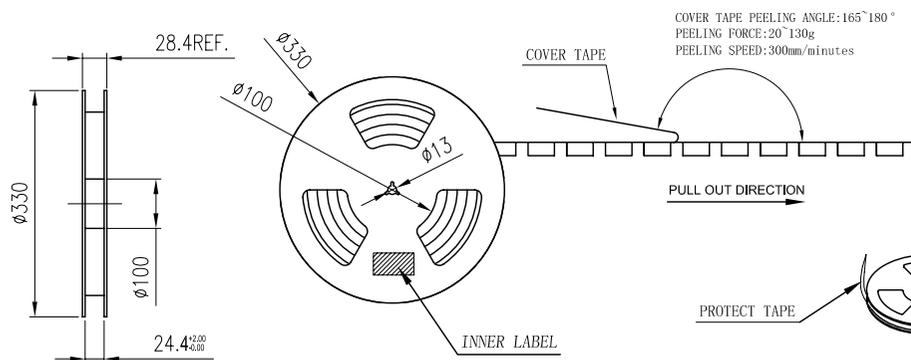


COVER TAPE PEELING ANGLE: 165°~180°
 PEELING FORCE: 20~130g
 PEELING SPEED: 300mm/minutes




PULL OUT DIRECTION

PROTECT TAPE

10 DISK

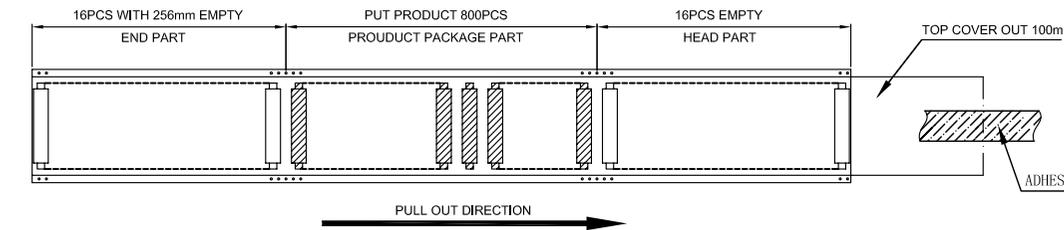

PULL OUT DIRECTION

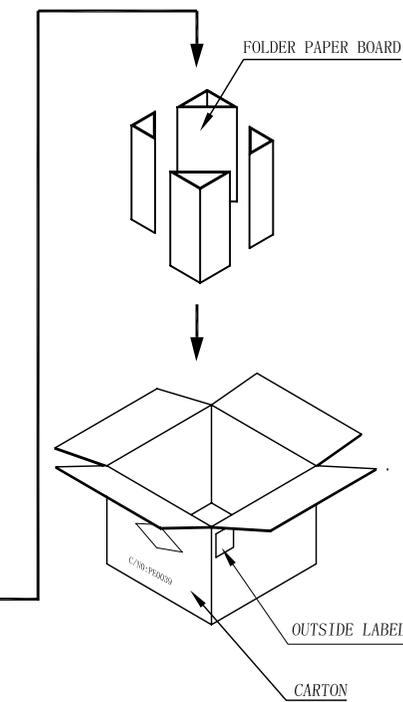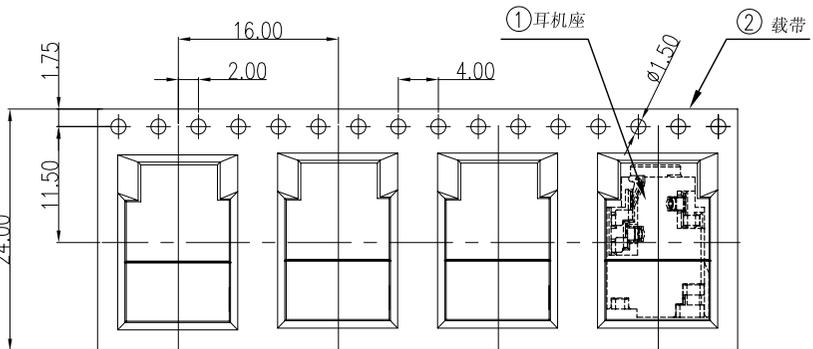

CARTON SIZE

1 CARTON = 10 REEL = 8000 PRODUCT

NOTES:

- Material requirements:
 - The carton material requirements for the K=A, Dimension is 350*340*310mm;
 - Reel materials for PET; size reel for 330*28.4.
- Packaging requirements:
 - The tape into the packing machine, before the empty 16PCS, after the release of the product 800PCS, then the empty 16PCS with 256mm length of stay;
 - Top cover should out 100mm of the carrier tape. After winding, using adhesive tape (80~150mm) to stick the leader of cover tap on the side of the carrier tape;
 - Winding a protect tape around the reel, then stick it by adhesive tape;
 - Label should paste in the designated area of the reel;
 - Put a dryer and a packed reel in the vacuum bag and make the vacuum process;
 - The tired folded 10 disks in the carton total 8000pcs;
 - Packed finished packing sealing, and in the outer carton label

一般公差 GENERAL TOLERANCE

X.X	±0.30	X'	±2'
X.XX	±0.20	X.X'	±1'
X.XXX	±0.10	▲	MAJOR DIM.

单位 UNIT mm

绘图 DR. 李兴泽
 校对 CHK. 董东平
 审核 CHK. 董东平
 核准 APPD. 杨章雄

料号 PART NO. PJ-3C04DR06T0-0001
 文件编号 NUMBER ENDPT01

品名 TITLE
 3.5mm Phone Jack CONN.

比例 SCALE 1/1
 SHEET 1/1
 版次 REV. A0

JCTC®
 TERMINAL&CONNECTORS

A0	21.05.19	新图面发行	董东平	杨章雄
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.

