

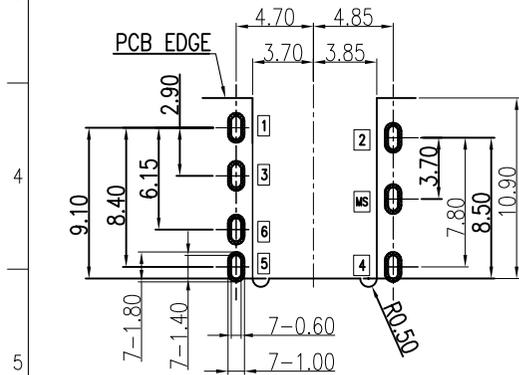
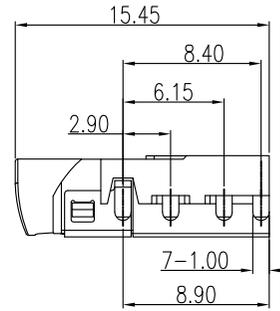
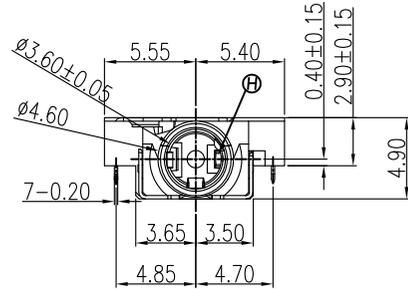
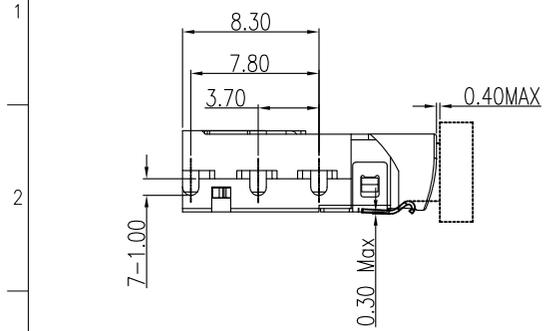


环保物料

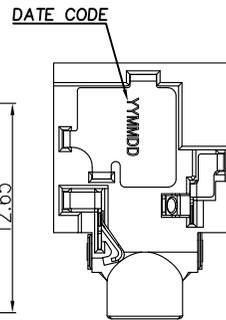

RECOMMENDED P.C.B LAYOUT(t=1.0mm)
TOP VIEW (TOLRANCE:±0.05)

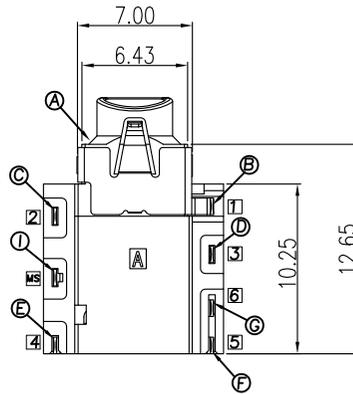

PJ:DC
3:∅3.5mm
2:∅2.5mm
B04:沉板0.4mm
D:DIP
S:SMT
R:90°
V:180°
0:带外壳
1:无外壳
5:5PIN
6:6PIN

PJ-3 B04 D R 0 6 T 0-01 XX

Contact Area plating on contacts
01: G/F 03: Au 3u"
05: Au 5u" 10: Au 10u"
15: Au 15u" 30: Au 30u"


流水码
01:
柱子/唛啦
0:无柱无唛啦
1:无柱+唛啦
2:带两个柱子无唛啦
3:带两个柱子+唛啦

T:10T

NOTES:

- MATERIAL: SEE "TABLE 1";
- FINISH: SEE "TABLE 1";
- ELECTRICAL:
 - VOLTAGE RATING: 12 VAC RMS;
 - CURRENT RATING: 1 AMP;
 - CONTACT RESISTANCE: 50mΩ Max.(Initial), 100mΩ Max.(After Life test);
 - INSULATION RESISTANCE: 100 MΩ Min., 500VDC.(Initial), 50 MΩ Min., 500VDC.(After Humidity test);
 - WITHSTAND VOLTAGE: 500 VAC RMS 50(60)Hz, 1 minute;
- MECHANICAL:
 - MATING FORCE: 10N-25N.
 - UNMATING FORCE: 6N-18N.
 - OPERATING LIFE: 5000 CYCLES MIN.;
- ENVIRONMENTAL:
 - SALT SPRAY: 48H.
 - OPERATION: -30°C~+80°C.

PLUG SPEC	SCHEMATIC	AFTER INSERT SCHEMATIC

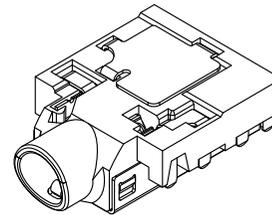



3D VIEW

TABLE 1:

NO.	DESCRIPTION	QTY	MATERIAL	REMARK
I	Shield shell	1	C5210, 0.20t	Welding Ni 50u"Min Overall
H	Insulator	1	HIGH TEMP LCP	Black
G	Make Spring	1	C5210, 0.20t	Au G/F Min on contact area
F	Transfer Spring	1	C5210, 0.20t	All over Ni 50u"Min
E	Tip spring	1	C5210, 0.20t	Au 1u" Min on contact area,
D	Ring spring	1	C5210, 0.20t	Au G/F Min on solder area
C	Ring spring	1	C5210, 0.20t	All over Ni 50u"Min
B	Earth spring	1	C5210, 0.20t	Au G/F Over All, Ni 50u"Min underplated.
A	Housing	1	HIGH TEMP PA10T	Black
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

A0		21.07.07	新版图面发行	董东平	杨章雄	一般公差 GENERAL TOLERANCE	绘图 DR. 李兴泽	料号 PART NO. PJ-3C04DR06T0-01XX	文件编号 NUMBER ENDPW03	 TERMINAL&CONNECTORS	
版次REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位 UNIT mm	X.X ±0.25 X* ±3' X.XX ±0.20 X.X* ±2' X.XXX ±0.10 ▲ MAJOR DIM.	校对 CHK. 董东平	品名 TITLE	比例 SCALE 1/1		版次 REV. AO
							审核 APPD. 杨章雄	∅3.5mm Phone Jack CONN	SHEET 1/1		

环保物料

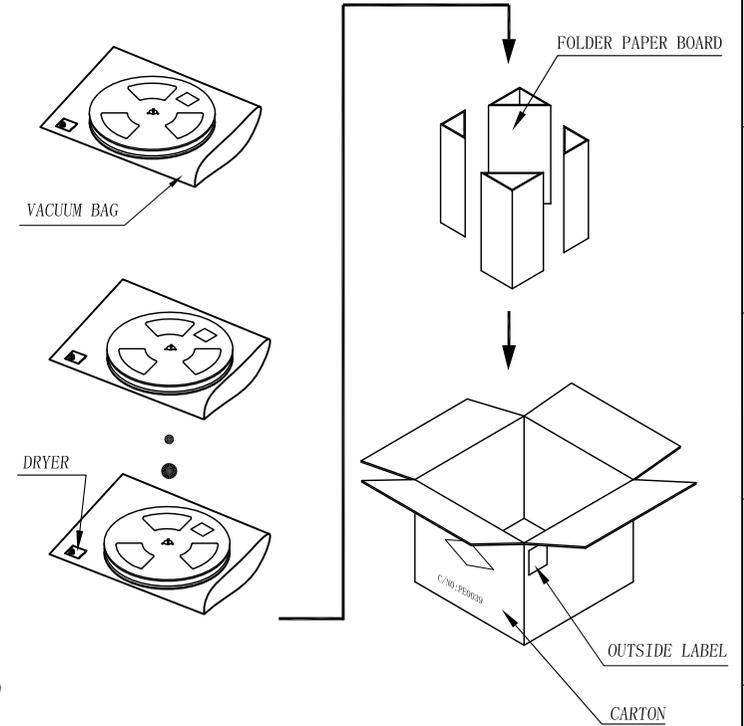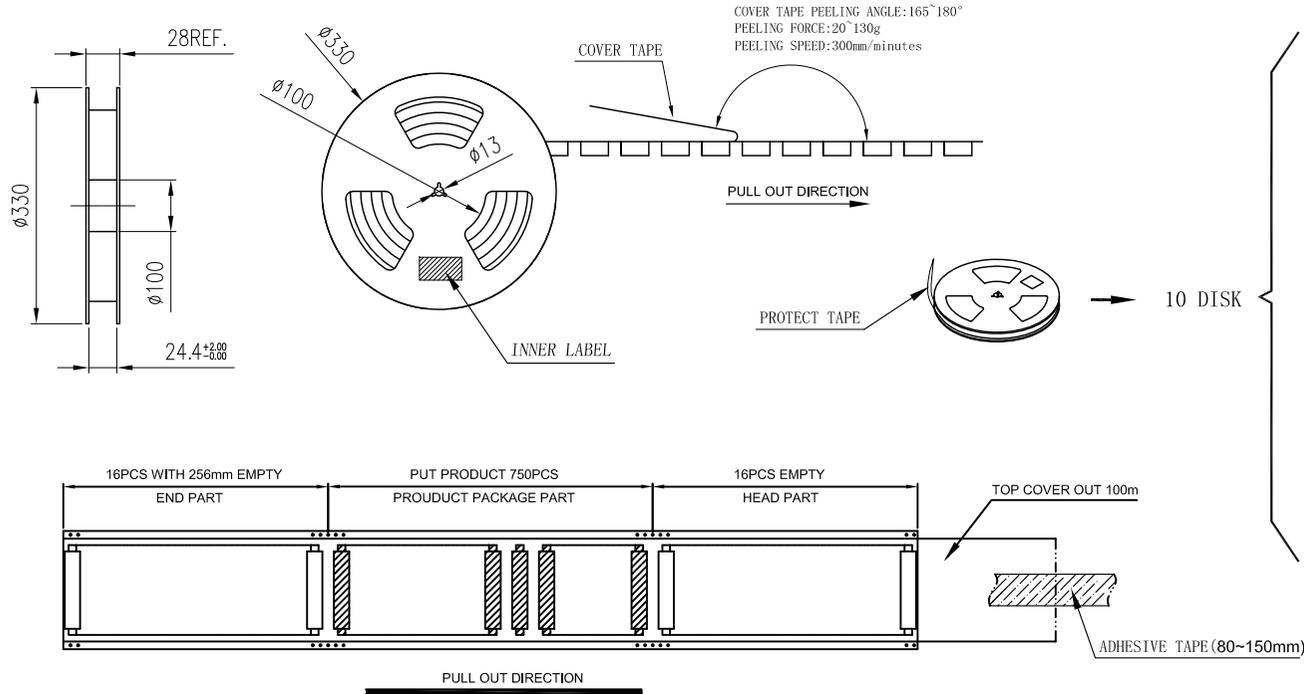

NOTES:

1. Material requirements:

1.1 The carton material requirements for the K=A, Dimension is $400*400*300mm$;

1.2 Reel materials for PS; size reel for $330*28$.

2. Packaging requirements:

2.1 The tape into the packing machine, before the empty 16PCS, after the release of the product 750CS, then the empty 16PCS with 256mm length of stay;

2.2 Top cover should out 100mm of the carrier tape. After winding, using adhesive tape (80~150mm) to stick the leader of cover tap on the side of the carrier tape;



2.3 Winding a protect tape around the reel, then stick it by adhesive tape;

2.4 label should paste in the designated area of the reel;

2.5 Put a dryer and a packed reel in the vacuum bag and make the vacuum process;

2.6 The tired folded 10 disks in the carton total 7500 pcs;

2.7 Packed finished packing sealing, and in the outer carton label

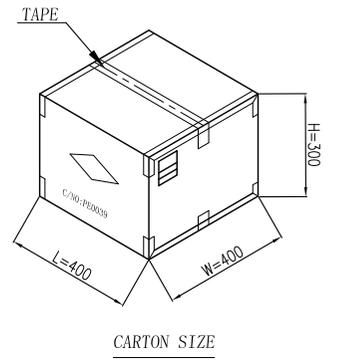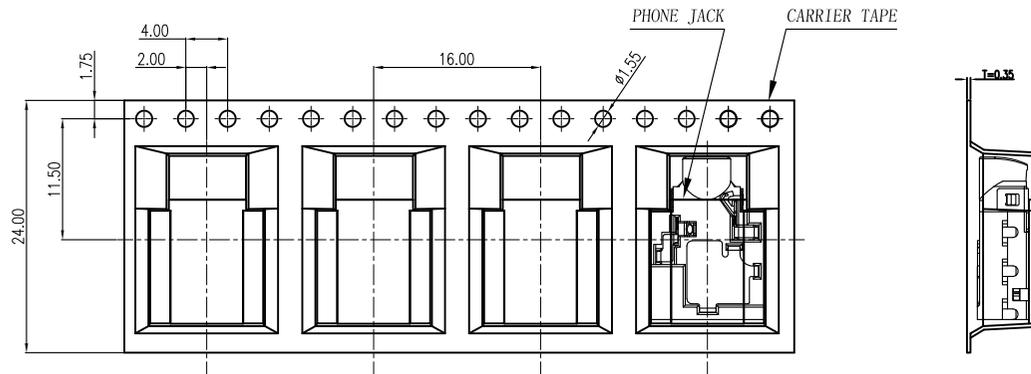

1 CARTON = 10 REEL = 7500 PRODUCT

一般公差 GENERAL TOLERANCE

X.X	± 0.25	X'	$\pm 3'$
X.XX	± 0.20	X.X'	$\pm 2'$
X.XXX	± 0.10	▲ MAJOR DIM.	

单位 UNIT	mm
---------	----

绘图 DR.

校对 CHK.

审核 CHK.

核准 APPD.

料号 PART NO.

PJ-3C04DR06T0-01XX

文件编号 NUMBER

ENDPW03

品名 TITLE

$\phi 3.5mm$ Phone Jack CONN

JCTC[®]
TERMINAL&CONNECTORS

比例 SCALE	SHEET	版次 REV.
1/1	1/1	AO

AO	21.07.07	新版图面发行	董东平	杨章雄
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.