


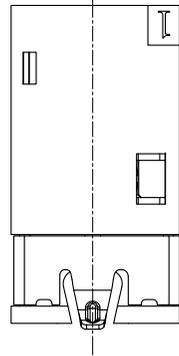



环保物料




- CONTACT CURRENT RATING: 1A.
- CONTACT RESISTANCE: 50 mΩ MAX.;
- INSULATION RESISTANCE: 100MΩ MIN.;
- DIELECTRIC WITHSTANDING: 500V AC MIN.;
- DURABILITY: 5,000 CYCLES MIN.;
- CONNECTOR MATING FORCES: 30N MAX.;
- CONNECTOR UNMATING FORCES: 3N MIN.;

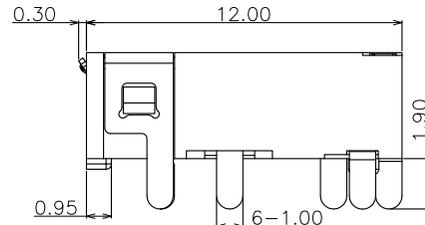

3D VIEW

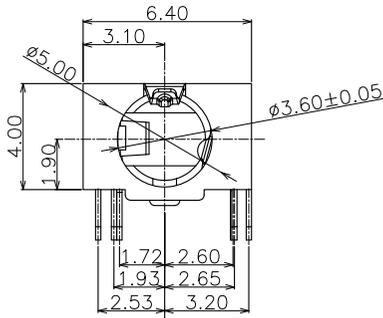

SCHEMATIC

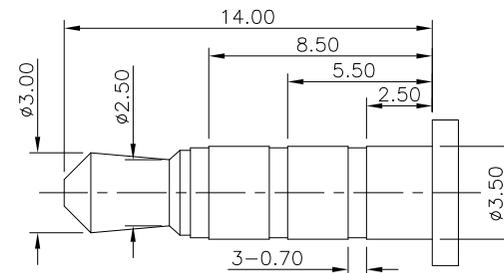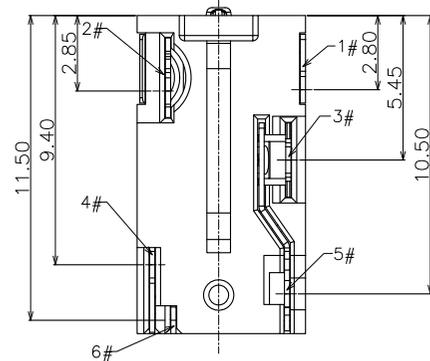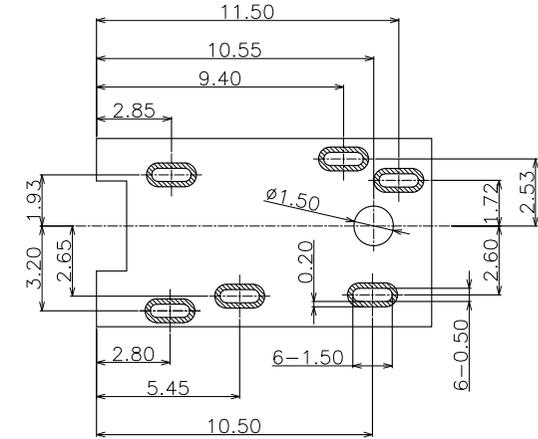

(ø3.50mm 4 POLE PLUG DETAIL DRAWING)


TABLE 1:

NO.	PART NAME	QTY	MATERIAL	DESCRIPTION	REMARK
⑦	Contact_6	1	C5210	GOLD FLASH/Ni	T=0.20mm
⑥	Contact_5	1	C5210		T=0.20mm
⑤	Contact_4	1	C5191		T=0.20mm
④	Contact_3	1	C5191		T=0.20mm
③	Contact_2	1	C5210		T=0.20mm
②	Contact_1	1	C5210		T=0.20mm
①	HOUSING	1	PA9T	UL94 V-0	BLACK



REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES	SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
A0	新图面发行	2021.04.24	 UNIT: MM SIZE: A4	LINEAR	1:1	APPROVED Nelson Luo DESIGNER Taylor Chen DRAWN Taylor Chen	2021.11.08 2021.11.08 2021.11.08	PJ-3C19DR1620-0001 TITLE ø3.5 PHONE JACK	ENDE05				
A1	更新图面发行	2021.11.08		ANGLES	X° REF±6°								
				0.00±0.25	X° ±3°								
				0.00±0.15	X° X'±2°								
				0.00±0.08						REV	A1	SHEET	1/1

环保物料



* 载带包装时请依此引出方向为标准

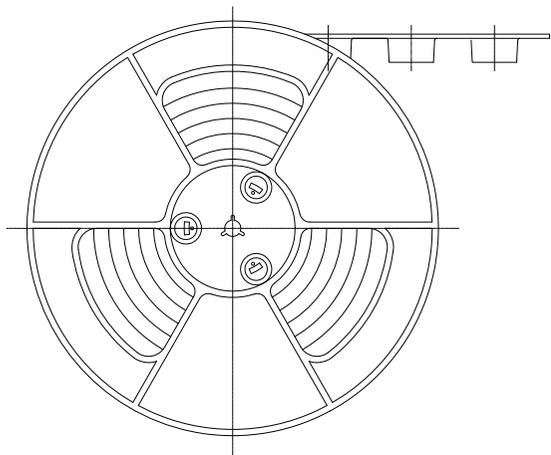

卷盘包装示意

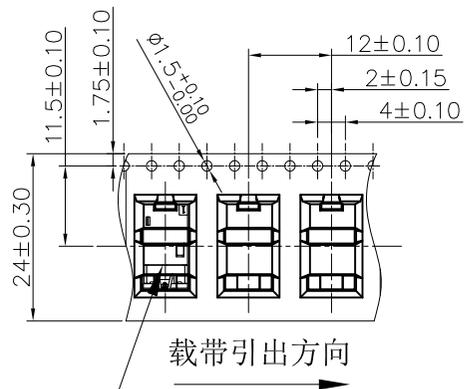

载带引出方向



载盘

标签一

三角块

干燥剂

薄膜袋 (HDPE)

标签二



纸箱

1载带=1000PCS

1外箱=1000PCS X 10盘载带=10000PCS

首末端分别空位20PCS

中间实装数量1000PCS

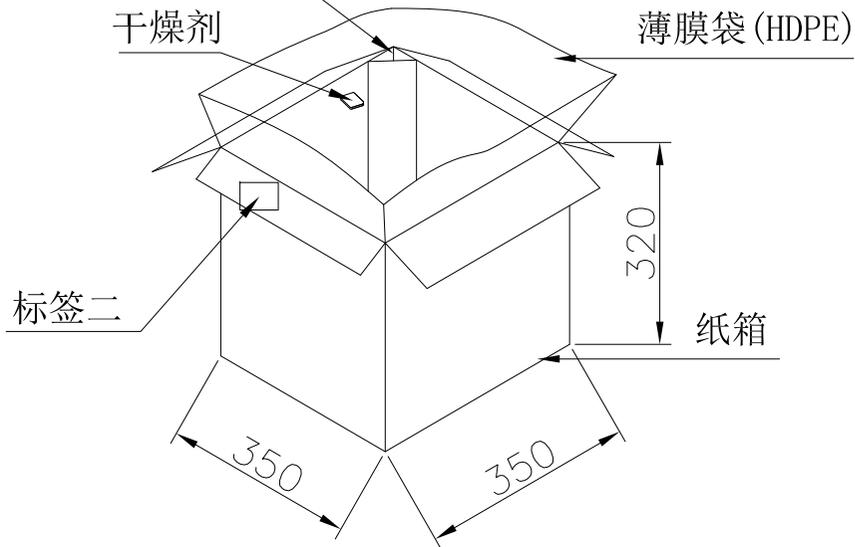

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS		
A0	新图面发行	2021.04.24		LINEAR	ANGLES	1:1	Nelson Luo	2021.11.08	PJ-3C19DR1620-0001	ENDE05			
A1	更新图面发行	2021.11.08	0.00±0.15	X° REF±6°	DESIGNER	Taylor Chen	2021.11.08	TITLE Φ3.5 PHONE JACK					
			0.00±0.08	X° X'±2°	DRAWN	Taylor Chen	2021.11.08						
			SIZE: A4							REV	A1	SHEET	1/1