

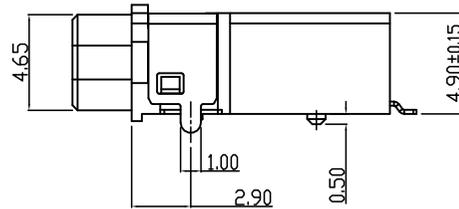

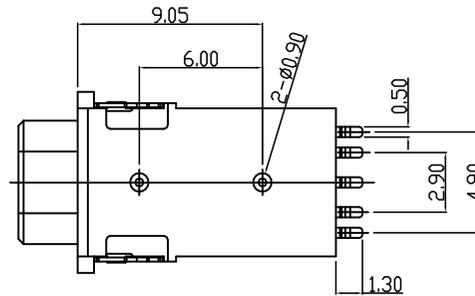


环保物料


NOTES:

1. MATERIAL: SEE "TABLE 1";
  2. FINISH: SEE "TABLE 1";
  3. ELECTRICAL:
    - 3.1. VOLTAGE RATING: 12 VAC RMS;
    - 3.2. CURRENT RATING: 1 AMP;
    - 3.3. CONTACT RESISTANCE: 50mΩ Max.(Initial), 100mΩ Max.(After Life test);
    - 3.4. INSULATION RESISTANCE: 100 MΩ Min., 500VDC.(Initial), 50 MΩ Min., 500VDC.(After Humidity test);
    - 3.5. WITHSTAND VOLTAGE: 500 VAC RMS 50(60)Hz, 1 minute;
  4. MECHANICAL:
    - 4.1. MATING FORCE: 3.0Kgf MAX.;
    - 4.2. UNMATING FORCE: 0.3Kgf MIN.;
    - 4.3. OPERATING LIFE: 5000 CYCLES MIN.;
  5. ENVIRONMENTAL:
    - 5.1. OPERATION: -30°C~+80°C.
4. Dustproof and waterproof grade: IP67.

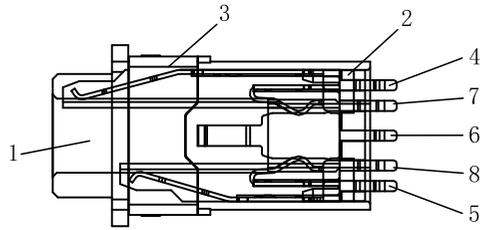


PJ-3 C28 S R 0 5 A 2-00 XX  
1 2 3 4 5 6 7 8 9 10 11

- 1.PJ: Phone JACK
- 2.3: ∅3.5mm
- 3.C28= 沉板2.85mm
- 4.S: SMT
- 5.R: 90°
- 6.0: 带外壳
- 7.5: 5PIN
- 8.A: PPA
9. 柱子/唛啦
- 2: 带两个柱子无唛啦
10. TYPE 码 00:
- 11.Contact Area plating on contacts  
01: G/F    02: Au 2u"  
03: Au 3u"    05: Au 5u"  
10: Au 10u"    15: Au 15u"  
30: Au 30u"

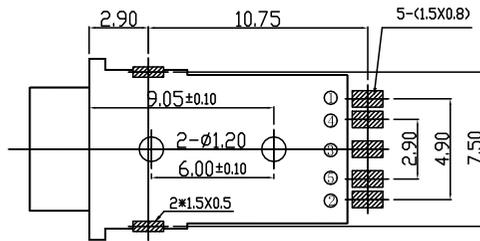

RECOMMENDED P. C. B LAYOUT  
TOP VIEW (TOLRANCE: ±0.05)

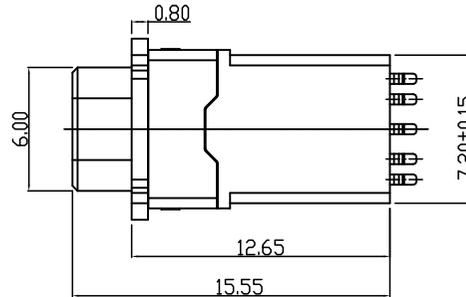

PLUG SPEC	SCHEMATIC	AFTER INSERT PLUG
(TOL: ±0.05) 		

NO.	DESCRIPTION	QTY	MATERIAL	REMARK
9	Rubber ring	1	Silica Gel	White
8	cover	1	HIGH TEMPERATURE PLASTIC	Black
7	Housing	1	HIGH TEMPERATURE PLASTIC	Black
6	Shunt	2	Phosphor bronze, 0.20t	1u" Au on Contact Area And Gold Flash On Other Area.
5	Tip spring ⑤	1	Phosphor bronze, 0.20t	
4	Ring spring ④	1	Phosphor bronze, 0.20t	
3	Ring spring ③	1	Phosphor bronze, 0.20t	
2	Tip spring ②	1	Phosphor bronze, 0.20t	
1	Earth spring ①	1	Phosphor bronze, 0.20t	

A0 21.08.11 新图面发行 董东平 杨章雄				一般公差 GENERAL TOLERANCE		料号 PART NO.		文件编号 NUMBER		 TERMINAL&CONNECTORS			
版次REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	X.X ±0.30	X* ±5'	PJ-3C28SR05A2-0001	ENDPT01					
				X.XX ±0.25		X.X* ±3'	品名 TITLE				比例 SCALE	SHEET	版次 REV.
				X.XXX ±0.10		∅3.5mm Phone Jack CONN.				1:1			
				▲ MAJOR DIM.									
				单位 UNIT									
				mm									
				绘图 DR.		王正顺							
				校对 CHK.		董东平							
				审核 CHK.		董东平							
				核准 APPD.		杨章雄							


环保物料

1载带=700PCS



1外箱=700PCSX8盘载带=5600PCS





载带引出方向  
\* 载带包装时请依此引出方向为标准

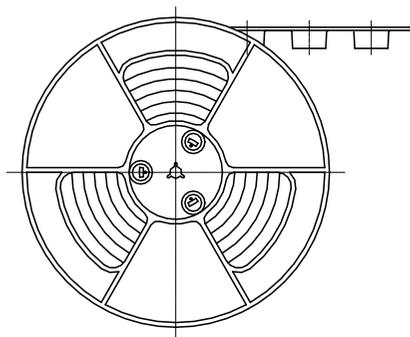

卷盘包装示意

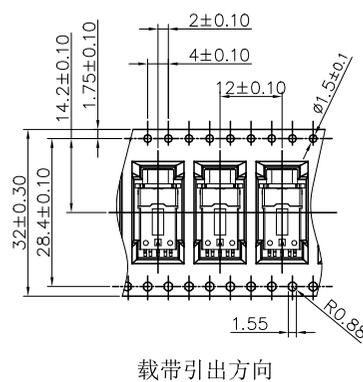

载带引出方向

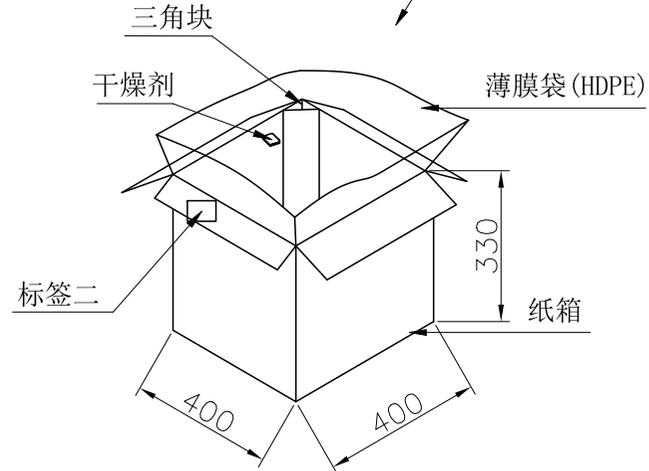

包材名称	材料及厚度(mm)	规格(mm)
PJ-3C28SR05A2-00XX 载带	P.S(白色透明)T=0.30	10400X32.00X5.55
载盘	HI P.S(蓝色)	φ330X38.40
自粘带	PET(白色透明)	W=25.30 T=0.06
375X450X0.06	PE(白色透明)	770X750X0.035
三角块	A=A+	260X300
400X400X330	K=K t=4	400X400X330

备注:

1. 每箱内必须放干燥剂;
2. 每箱必须用PE带密封包装;
3. 参考《高温材料管理规定》进行作业;
4. 我司标准格式标签或标签按客户要求制作;

				一般公差GENERAL TOLERANCE		绘图 DR.	王正顺	料号 PART NO.	文件编号 NUMBER	 TERMINAL&CONNECTORS
				X.X ±0.30	X' ±5'	校对 CHK.	董东平	PJ-3C28SR05A2-0001	ENDPT01	
				X.XX ±0.25	X.X' ±3'	审核 CHK.	董东平	品名TITLE		比例SCALE 1:1 SHEET 1/1 版次REV. A0
A0	21.08.11	新图面发行	董东平	杨章雄	X.XXX ±0.10	▲MAJOR DIM.	核准 APPD.	φ3.5mm Phone Jack CONN. 包装图		
版次REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位UNIT mm					