



环保物料

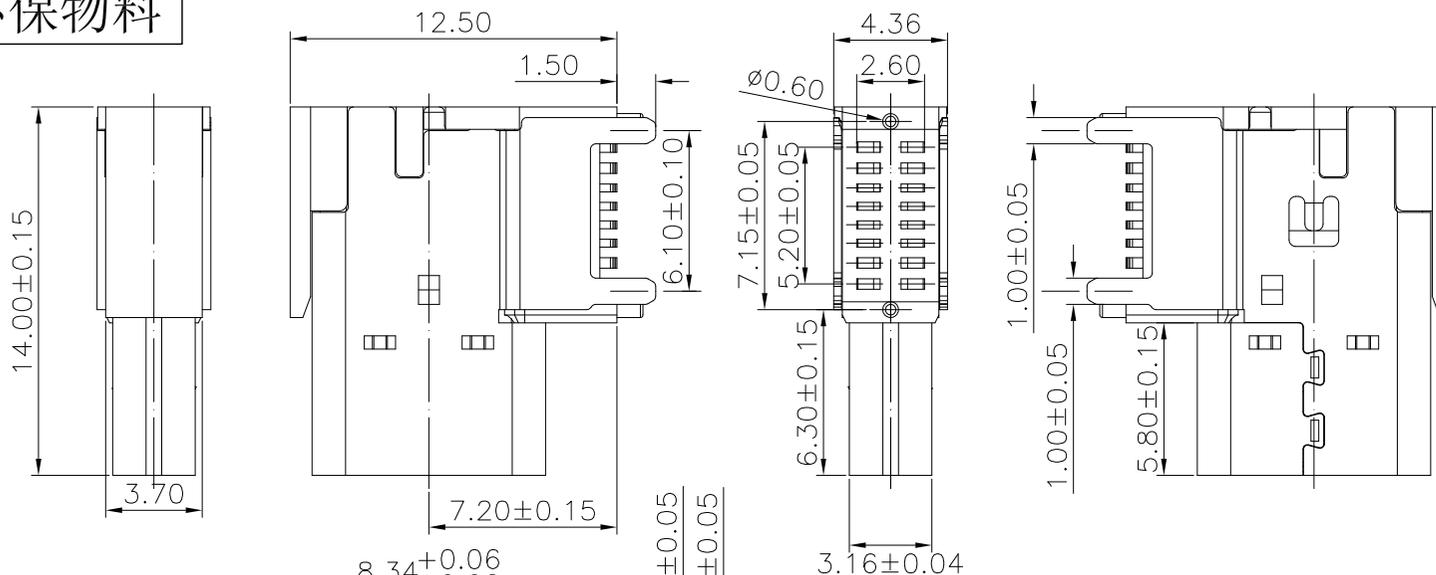

特性:

- 一、电气性能: EICTRICAL
 - 1.额定电流: 5.0A
 - 2.接触阻抗: 40 MILLIOHMS MAX
 - 3.耐电压: 100V AC / 1 mA MAX
 - 4.绝缘阻抗: 150V DC/100 MEGA OHMS MIN
- 二、机械性能:
 - 1.插入力: 5~20N ; 拔出力: 8~20N
 - 2.使用寿命: 10000次
- 三、材料: MATERIAL
- 四、电镀: FINISH
 - 1.端子: 接触点镀金1u"MIN PIN脚焊接区域镀金G/F
 - 2.外壳: 镀镍80u"MIN
- 五、电镀品需做粘锡测试: 粘锡面积达到95%以上。
- 六、SMT回流焊(峰值260°C±5°C)不能起泡、熔胶、变色不良(变形在公差范围内)
- 七、工作温度: -55°C~+85°C
- 八、盐雾测试: 通过48H在浓度为5±1%盐水的盐雾测试无生锈现象

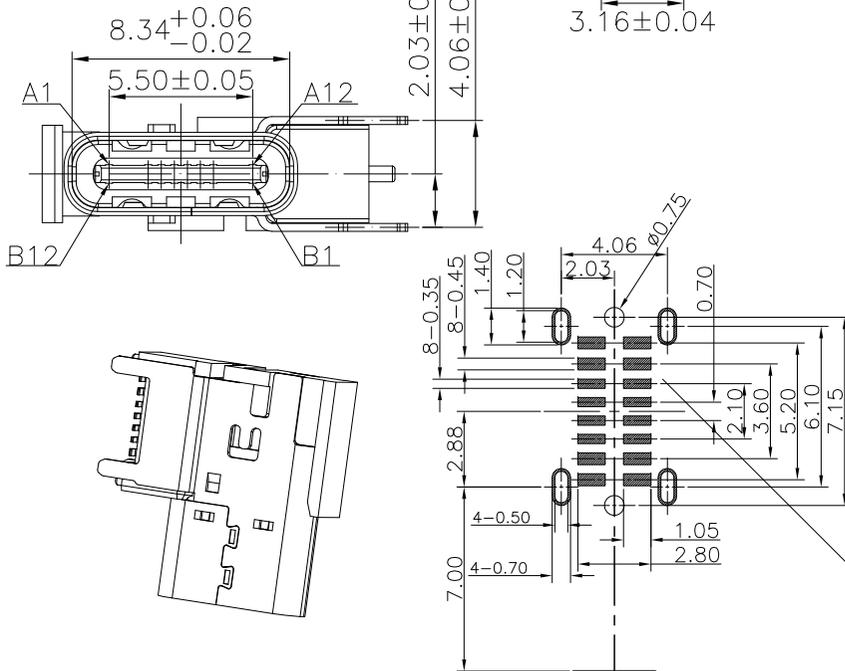

UC-F A125 S R -E B L A 0 01
1 2 3 4 5 6 7 8 9 10 11

- 1.USB TYPE C
- 2.F:FEMALE
- 3.A125=板上高度12.5mm
- 4.S:SMT
- 5.R:90°
- 6.端子材质: E:C7025
- 7.端子PIN数: B:16PIN
- 8.胶芯材质: L:LCP
- 9.胶芯颜色: A: 黑色
- 10.流水码: 0
- 11.Contact Area plating on contacts
- 01: G/F






A1	GND	B12	GND
A2		B11	
A3		B10	
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	D+	B7	D-
A7	D-	B6	D+
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10		B3	
A11		B2	
A12	GND	B1	GND

B12	A1
B9	A4
B8	A5
B7	A6
B6	A7
B5	A8
B4	A9
B1	A12

BOM			
序号	名称	用量	品名规格
1	外壳	1	Typec侧贴16PIN H=6.7外壳 SUS304 T=0.30mm
2	Molding 3	1	Typec侧贴 SMT 16PIN Molding C7025 LCP黑色 H=7.2 半成品
2.1	Molding 1	1	Typec侧贴 SMT 16PIN Molding A C7025 LCP黑色 H=7.2
2.2	Molding 2	1	Typec侧贴 SMT 16PIN Molding B C7025 LCP黑色 H=7.2
2.3	卡勾	1	Typec侧贴 SMT 16PIN 卡勾 SUS301 T=0.15mm

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
A0	新图面发行	22.03.26	LINEAR	1:1	Frey Yang	22.03.26	UC-FA125SR-EBLA001	ENDE05				
			ANGLES	APPROVED	Daniel Dong	22.03.26	TITLE					
			0.0±0.30 X° REF±6°	DESIGNER	CGY	22.03.26	Type-C 16PIN 侧插(CH=7.2)					
			0.00±0.20 X° ±3°	DRAWN					REV	AO	SHEET	1/1

环保物料

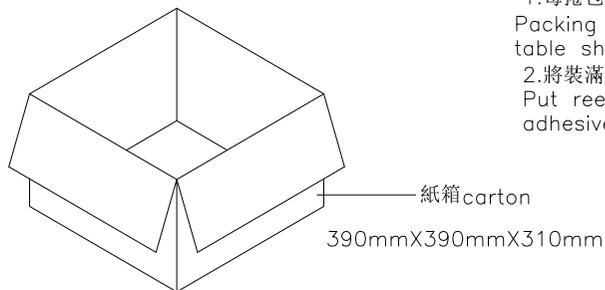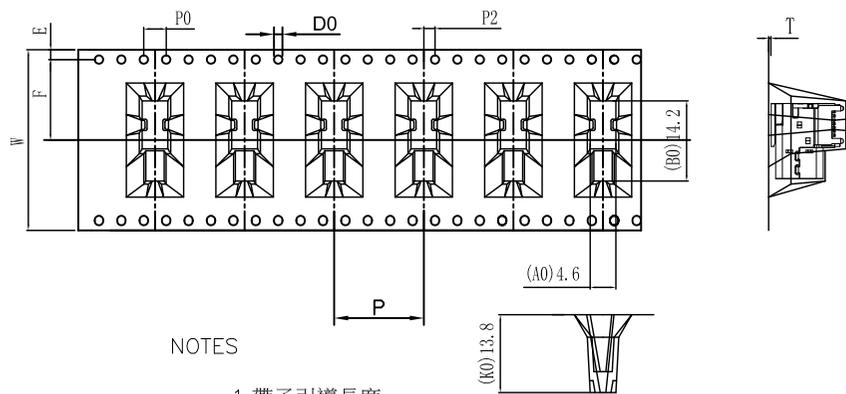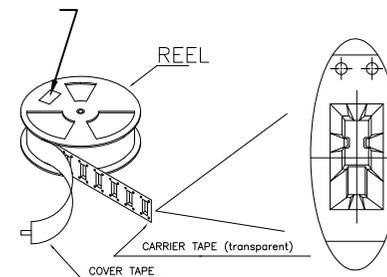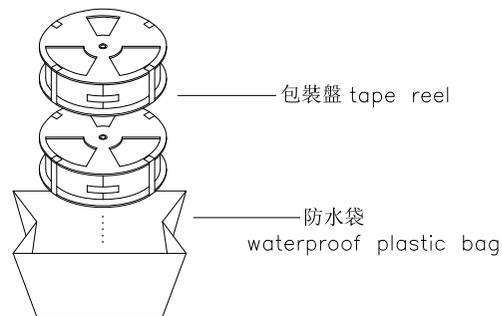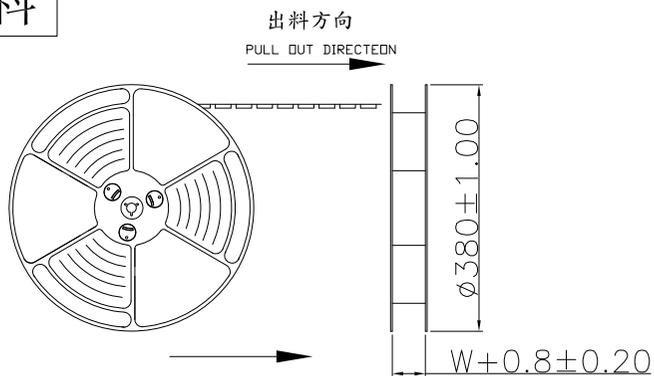


NOTE:

1. 每捲包裝數量及每箱裝箱數量如左下表格。
Packing q'ty of each reel & carton as below table shown.
2. 將裝滿產品的卷盤放入紙箱並以膠帶封口
Put reels in the carton and use adhesive tape to seal up.

NOTES

1. 帶子引導長度
LEAD TAPE LENGTH

出料方向
PULL OUT DIRECTEON



2. 上帶 剝力力為: 0.1~1.3N(10.2gf~130gf)
PEELING OFF FORCE OF TOP TAPE: 0.1~1.3N(10.2gf~130gf)
出貨運輸過程中一定注意:
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT:
卷帶在運輸過程中不能散開
PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION



卷帶	規格: $\phi 380\text{mm}$	包裝數量: 400PCS
紙箱	規格: 390mm X 390mm X 310mm	包裝數量: 8盤 / 3200PCS

W	32±0.3
F	14.2±0.1
S0	±0.1
T	0.50±0.1
E	1.75±0.1
P	16.0±0.1
P0	4±0.1
P2	2±0.15
A0	4.60±0.1
B0	14.2±0.1
K0	13.8±0.1
D0	1.50±0.1

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.	 JCTC ® TERMINAL&CONNECTORS
A0	新圖面發行	22.03.26		LINEAR	ANGLES	APPROVED	Frey Yang	22.03.26	UC-FA125SR-EBLA001	ENDE05	
			0.00±0.20	X° REF±6°	DESIGNER	Daniel Dong	22.03.26	TITLE			
			SIZE: A4	0.000±0.10	X° X'±2°	DRAWN	CGY	22.03.26	Type-C 16PIN 側插(CH=7.2)		
REV	A0	SHEET	1/1								