

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

NOTES:





SPECIFICATION:

1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
9. FINISH: CONTACT AREA: GOLD PLATING 3u”(0.075um)

UC-F A326 S R-A B L A 0 30

1 2 3 4 5 6 7 8 9 10 11


- 1.USB TYPE C
- 2.F:FEMALE
- 3.A326=板上高度3.26mm
- 4.S:SMT
- 5.R:90°
- 6.端子材质: A:C2680
- 7.端子PIN数: B:16PIN
- 8.胶芯材质:L:LCP
- 9.胶芯颜色: A: 黑色
- 10.流水码: 0:普通
30: Au 30u”

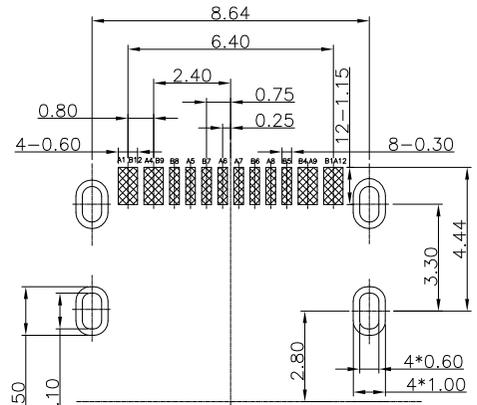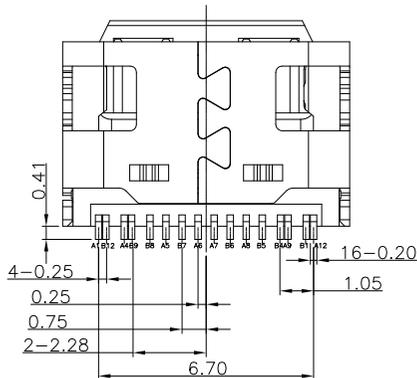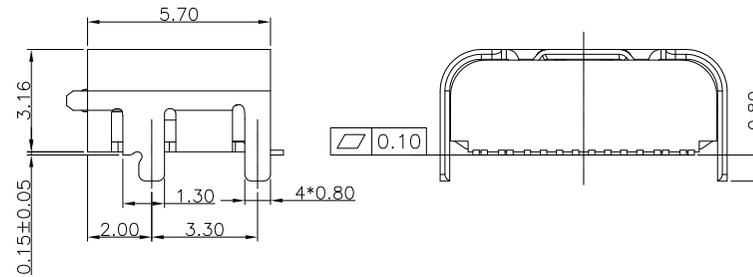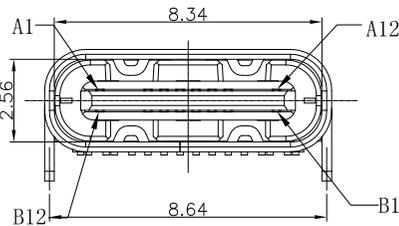

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

6	SHELL	SUS201	NI Plated	1PCS
5	SHIELDING PLATE	SUS301	---	1PCS
4	MD	LCP	See Note	1PCS
3	CONTACT	C2680	Au/Ni Plated	1SET
2	CONTACT	C2680	Au/Ni Plated	1SET
1	HOUSING	LCP	See Note	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE	NAME	DATE	PART NO.	DWG NO.				
A0	新版图纸发行	21.06.11	LINEAR	1:1			UC-FA326SR-ABLA030	ENDE05				
A1	换图框发行	23.07.20	ANGLES	APPROVED								
A2	按客户要求变更	23.08.10	0.0 ± 0.25 X° REF ± 6°	DESIGNER			TITLE					
			0.00 ± 0.15 X° ± 3°	DRAWN	Xiao	23.08.10	USB Type C REC 单排16P 5.7四脚插板 CONN		REV	A2	SHEET	1/1

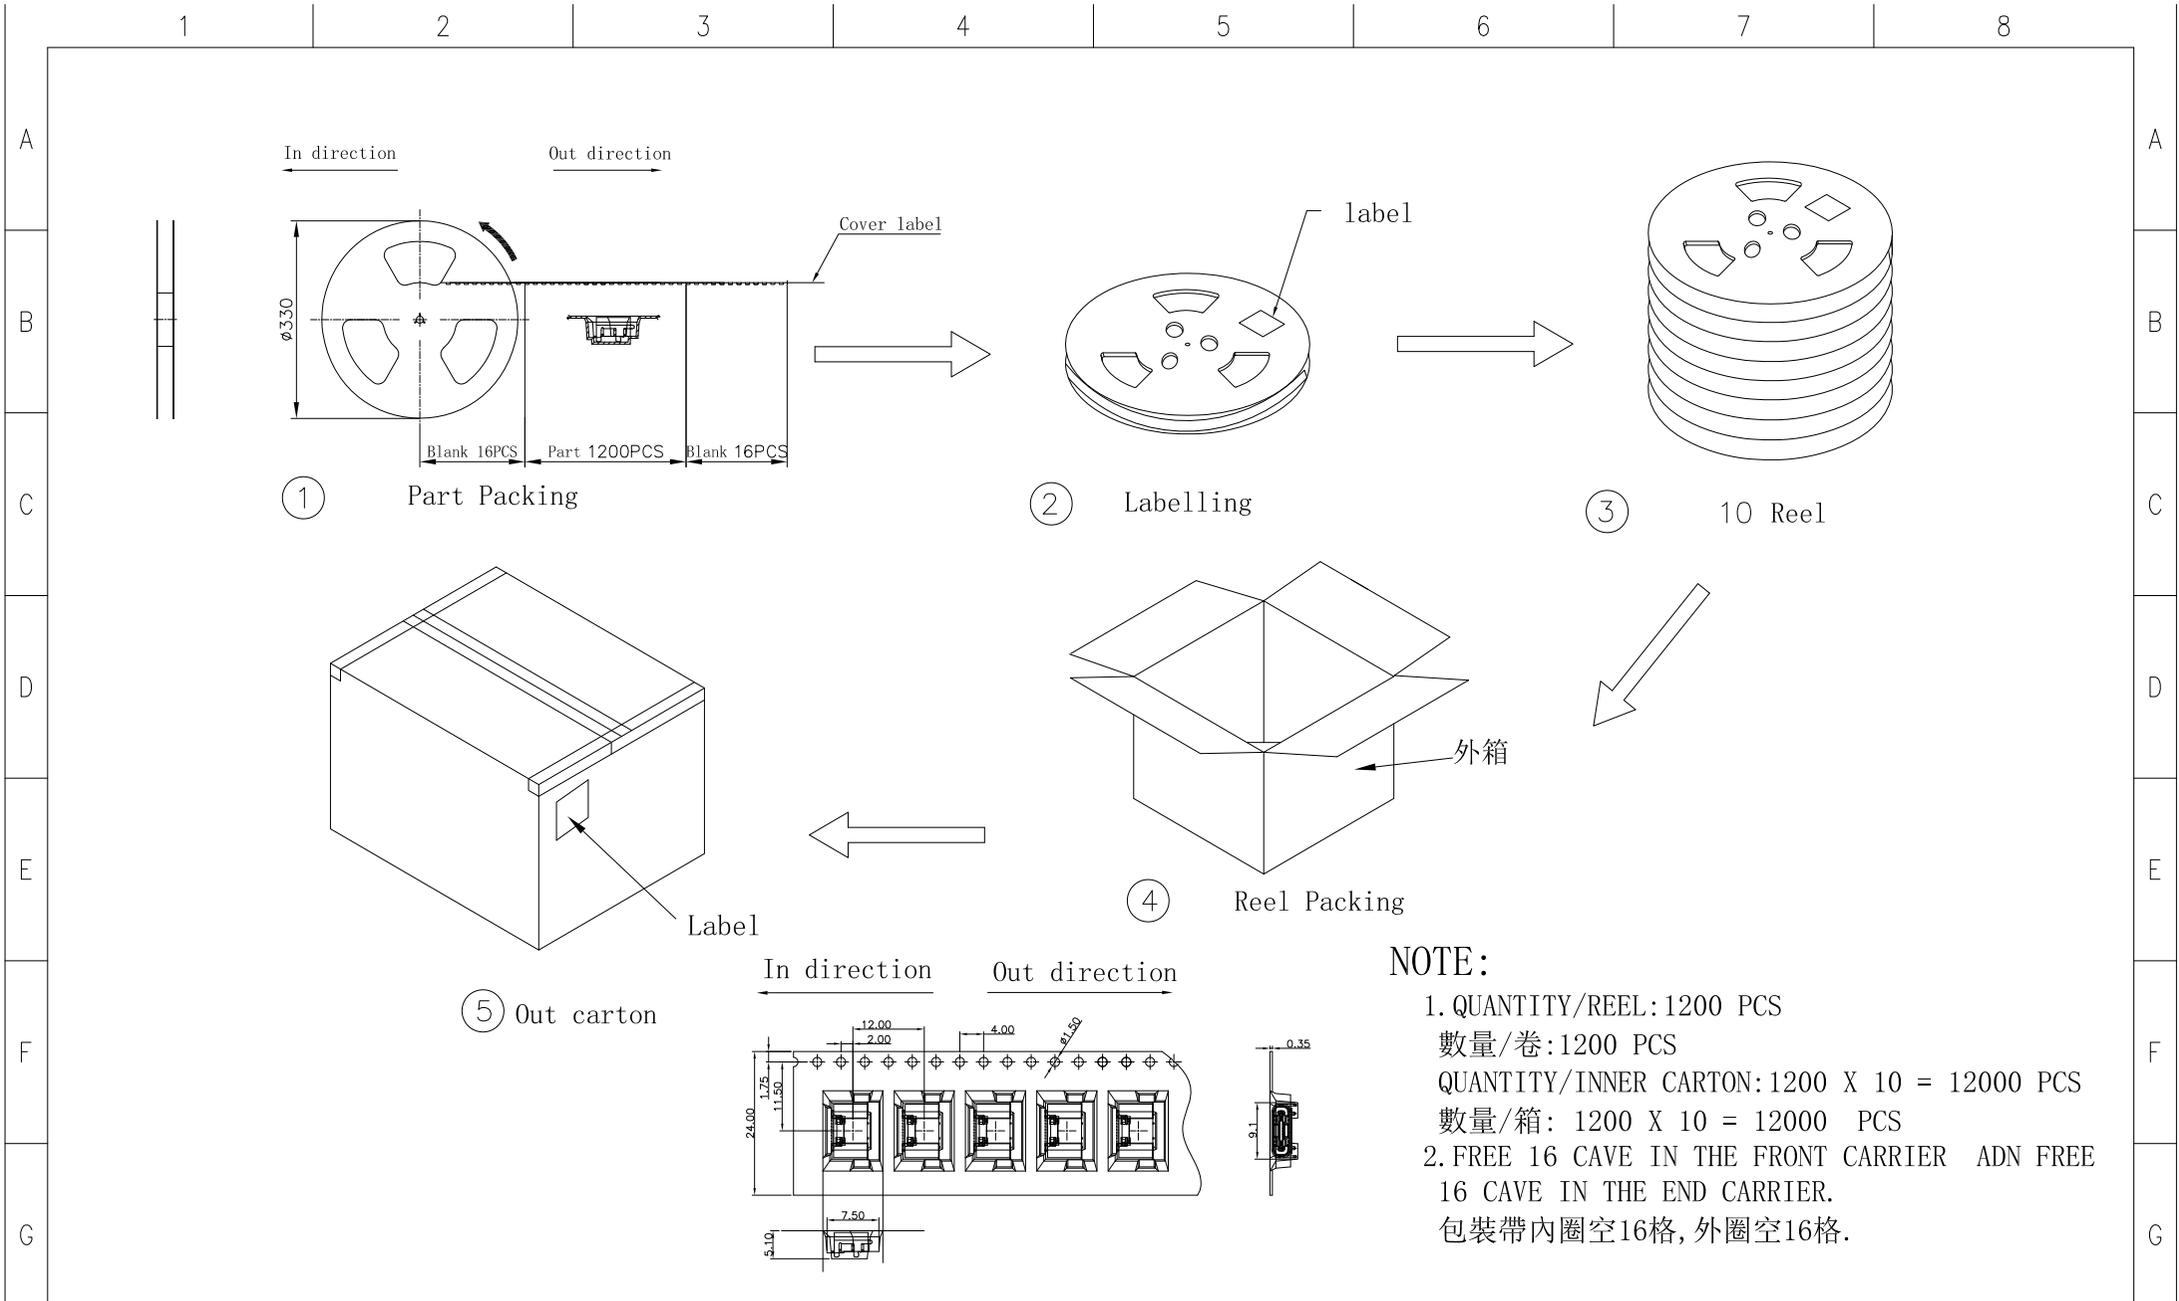

NOTE:

- 1. QUANTITY/REEL: 1200 PCS
數量/卷: 1200 PCS
- QUANTITY/INNER CARTON: 1200 X 10 = 12000 PCS
數量/箱: 1200 X 10 = 12000 PCS
- 2. FREE 16 CAVE IN THE FRONT CARRIER AND FREE 16 CAVE IN THE END CARRIER.
包裝帶內圈空16格, 外圈空16格。

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	JCTC ®
A0	新版图纸发行	21.06.11		LINEAR	ANGLES	1:1					
A1	换图框发行	23.07.20	0.00±0.15	X° REF±6°	APPROVED	UC-FA326SR-ABLA030	ENDE05				
A2	那客户要求变更	23.08.10	0.00±0.08	X° X'±2°	DESIGNER	TITLE USB Type C REC 单排16P 5.7脚插板 CONN					
			SIZE: A4		DRAWN	Xiao	23.08.10	REV	A2	SHEET	1/1